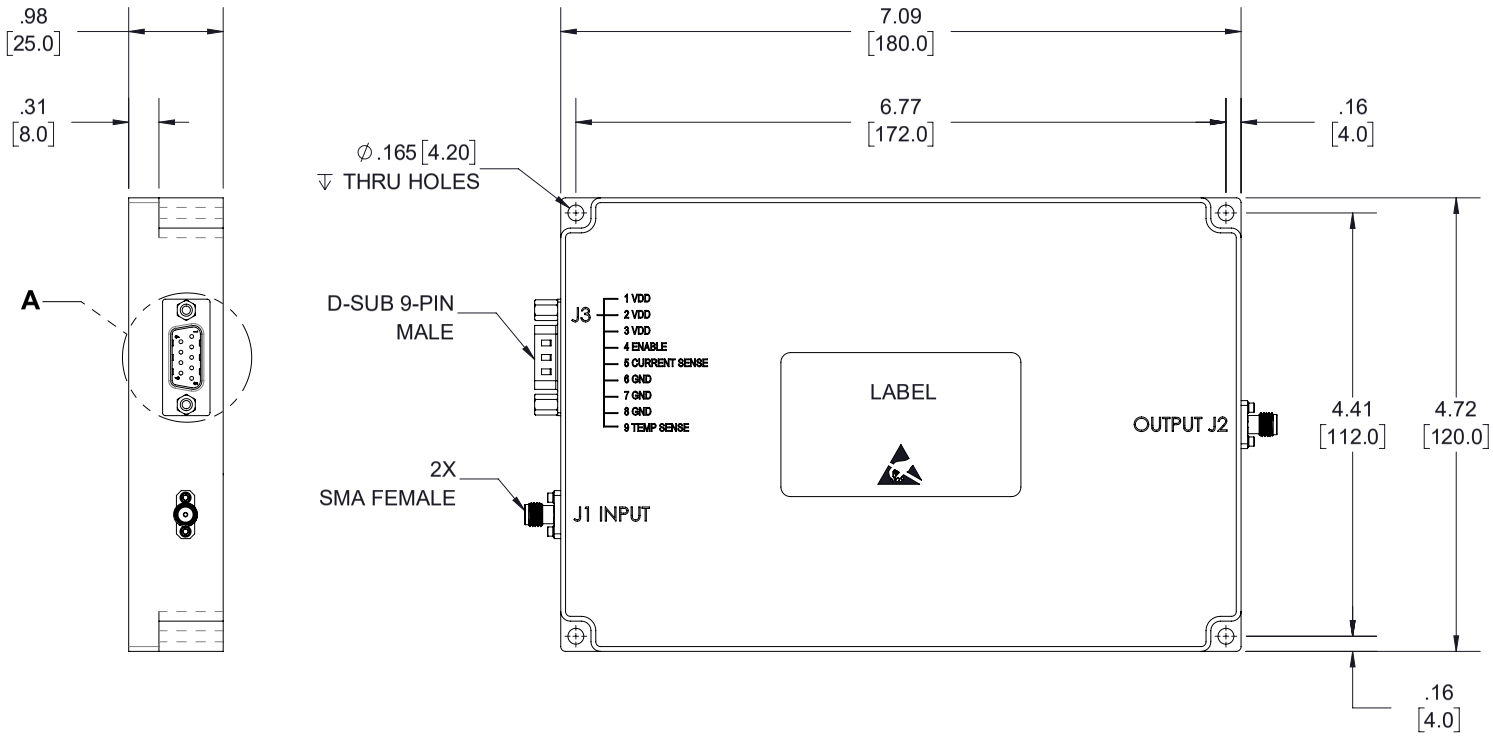



DETAIL A

D-SUB 9-PIN, MALE		
PIN #	**DESCRIPTION**	**SPECIFICATIONS**
1,2,3	VDD	28 VDC
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
6,7,8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

LABEL

Fairview Microwave
an INFINITE brand
FMAM5062
S/N: XXXXXXX

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
- ADEQUATE HEATSINK REQUIRED.

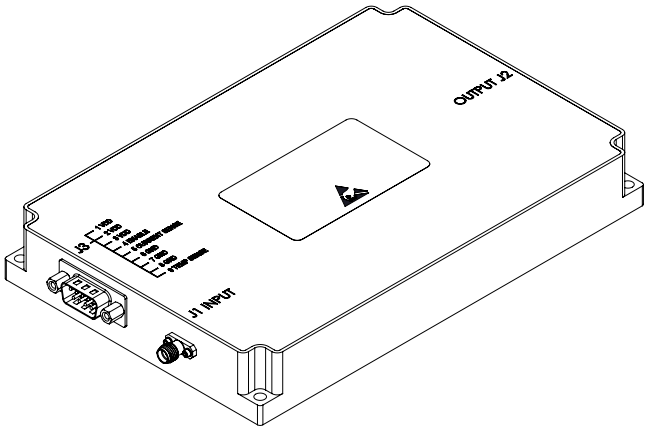

Fairview Microwave
an INFINITE brand

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE	DWG NO	CAGE CODE
	FMAM5062	3FKR5

CAD FILE	07/30/19	SHEET	1 OF 1	SCALE	N/A	SIZE	A	7361