


46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

Features

- GaN Design
- 2 GHz to 6 GHz Frequency Range
- Psat 40 Watts typ
- Power Gain: 46 dB typ
- Power Added Efficiency: 25%
- Gain Flatness ± 2 dB typ
- Enable with TTL Logic Control
- Current and Temperature Sense Functions
- 50 Ohms Input and Output Matched
- High Efficiency
- Unconditionally Stable
- Low Distortion
- Class AB
- D-Sub Control Connector with Mating Female Connector
- Optional Heatsink Available: Model FMAMG5068F

Applications

- Military Radio
- Communication Systems
- High Gain Driver Power Amplifier
- S & C Band Applications
- Test and Measurement applications

Description

The FMAM5067 is a high power amplifier that operates from 2 GHz to 6 GHz and generates 40 watts of saturated output power. The module utilizes GaN and chip-and-wire technology in the manufacturing process that ensures state-of-the-art power performance with excellent power-to-volume ratio that's ideal for broadband high power linear applications. This Class AB amplifier is designed for a 50 ohm input/output impedance and offers high efficiency and high linearity, operating over a wide dynamic range with impressive typical performance that includes 40 dB gain, 25% power added efficiency, ± 2 dB gain flatness, -20 dBc harmonic suppression, -60 dBc Spurious, and a maximum input power level of +10 dBm. Typical DC bias requirements include +28V and 6A of current. The module uses an SMA female input and output connector. The DC interface incorporates a Hybrid D-Sub 7 pin male connector for DC bias, Enable with TTL logic control, Current Sense, and Temperature Sense functions. A mating female D-SUB socket connector is included. The rugged amplifier design operates over wide temperature range from -20°C and +60°C and can withstand relative humidity exposure up to 95% maximum. An available heatsink with cooling fan (model PE15G5068F) is recommended to maintain an optimum baseplate temperature during operation.

Electrical Specifications (TA = +25°C, DC Voltage = +28Volts, DC Current = 6A)

Description	Min	Typ	Max	Unit
Frequency Range	2		6	GHz
Small Signal Gain		46		dB
Gain Flatness		± 2		dB
Pout at Sat.		+46		dBm
Efficiency (PAE)		25		%
Output Power at 1 dB Compression Point		+40		dBm
Harmonics @30 Watts		-20		dBc
Spurious @30 Watts		-60		dBc
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR			3:1	
Input Return Loss			-10	dB
Operating DC Voltage	+26	+28	+30	Volts
Operating DC Current @30 Watts		6		A

46 dB Gain High Power GaN Amplifier at 40 Watt
Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

Electrical Specifications (TA = +25°C, DC Voltage = +28Volts, DC Current = 6A)

Description	Min	Typ	Max	Unit
OFF/ON Switch Time (10% to 90%)		2	3	μs
Operating Temperature Range	-20		+60	°C

Electrical Specification Notes:
Allow for 20% Increased DC Current during initial power-up stage

Absolute Maximum Rating

Parameter	Rating
Input RF drive level without damage	+10 dBm (MAX)
Load VSWR @ Pout = 30 W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ Graceful Degradation



ESD Sensitive Material,
Transport material in
Approved ESD bags. Handle
only in approved
ESD Workstation.

Mechanical Specifications

Size


Length	6.2 in [157.48 mm]
Width	3 in [76.2 mm]
Height	0.98 in [24.89 mm]
Weight	1.5 lbs [680.39 g]
Input Connector	SMA Female
Output Connector	SMA Female
Bias Connector	Hybrid 7-Pin D-Subminiature Male

Environmental Specifications

Temperature

Operating Range	-20 to +60 deg C
Storage Range	-45 to +85 deg C
Humidity	95% Non-Condensing
Shock	Normal Truck Transport
Vibration	Normal Truck Transport

46 dB Gain High Power GaN Amplifier at 40 Watt
Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25 °C, sea level
- Heatsink Required for Proper Operation Recommended Model: FMAMG5068F

46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

46 dB Gain High Power GaN Amplifier at 40 Watt
Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

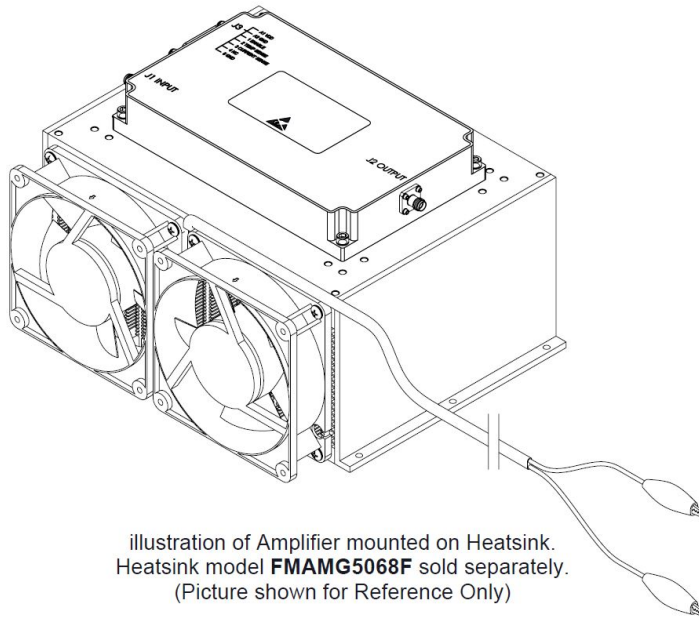




illustration of Amplifier mounted on Heatsink.
Heatsink model **FMAMG5068F** sold separately.
(Picture shown for Reference Only)

46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067



Typical Performance Data

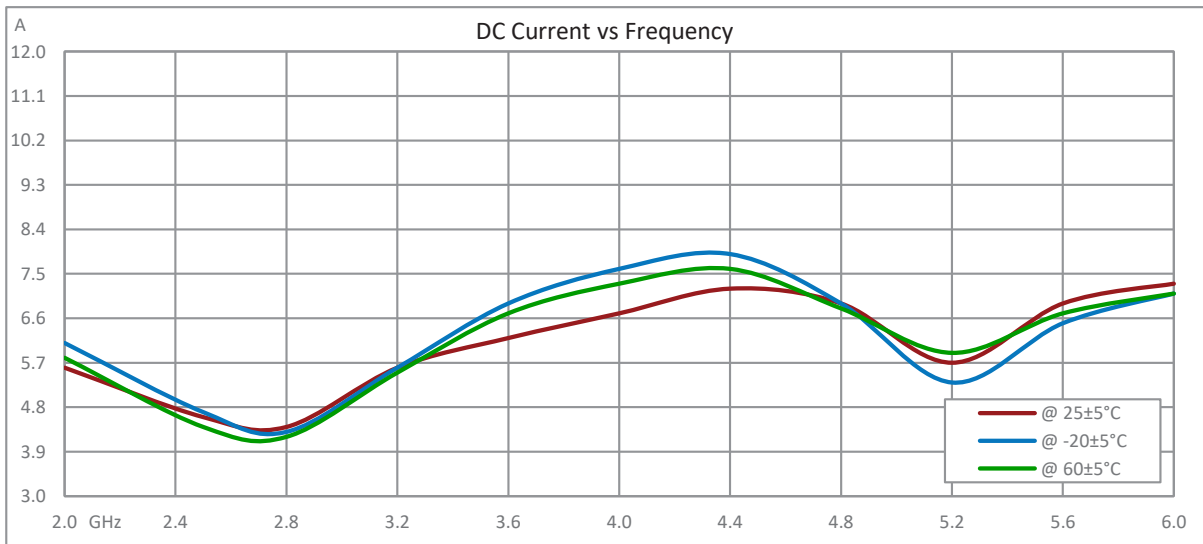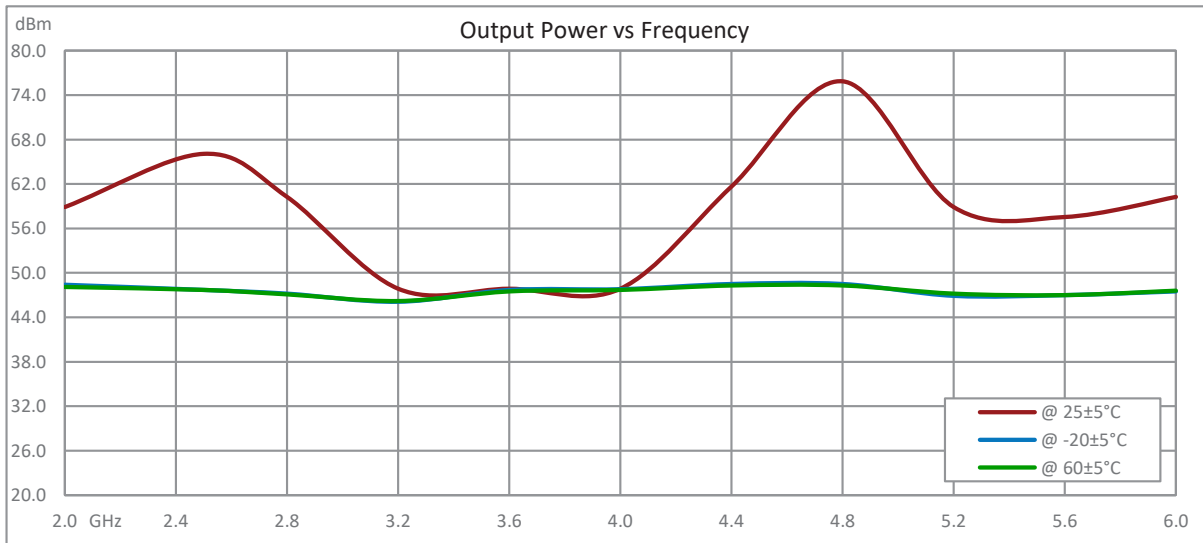


46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA




FMAM5067

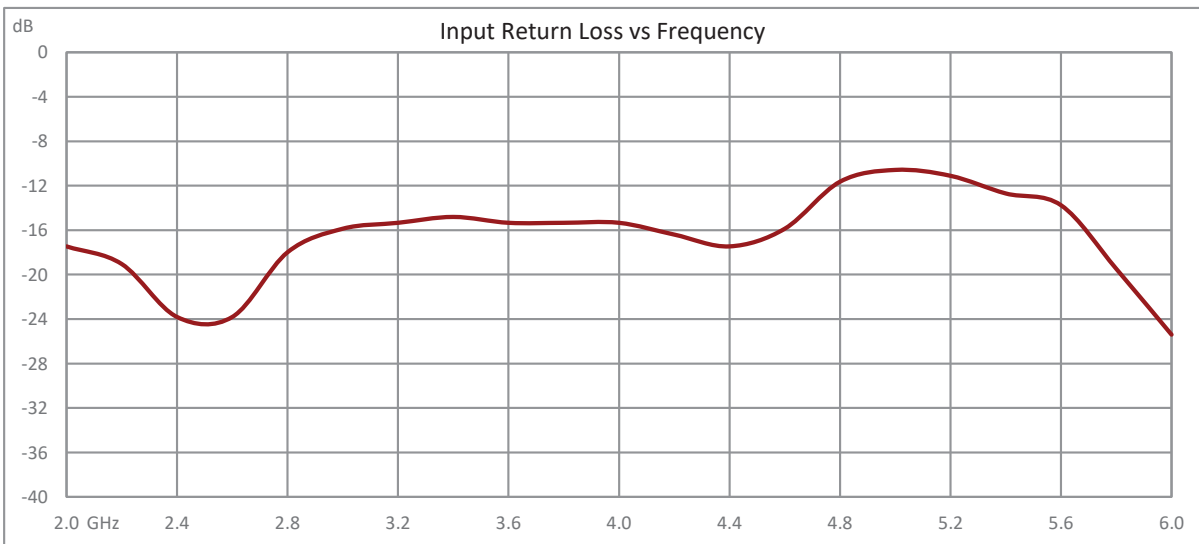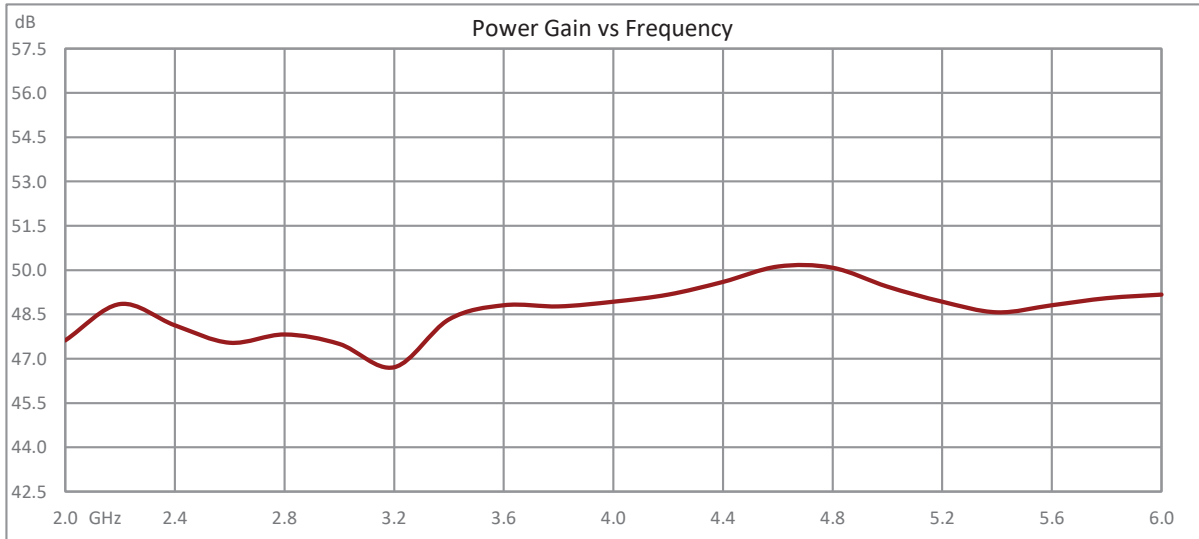

46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA



FMAM5067

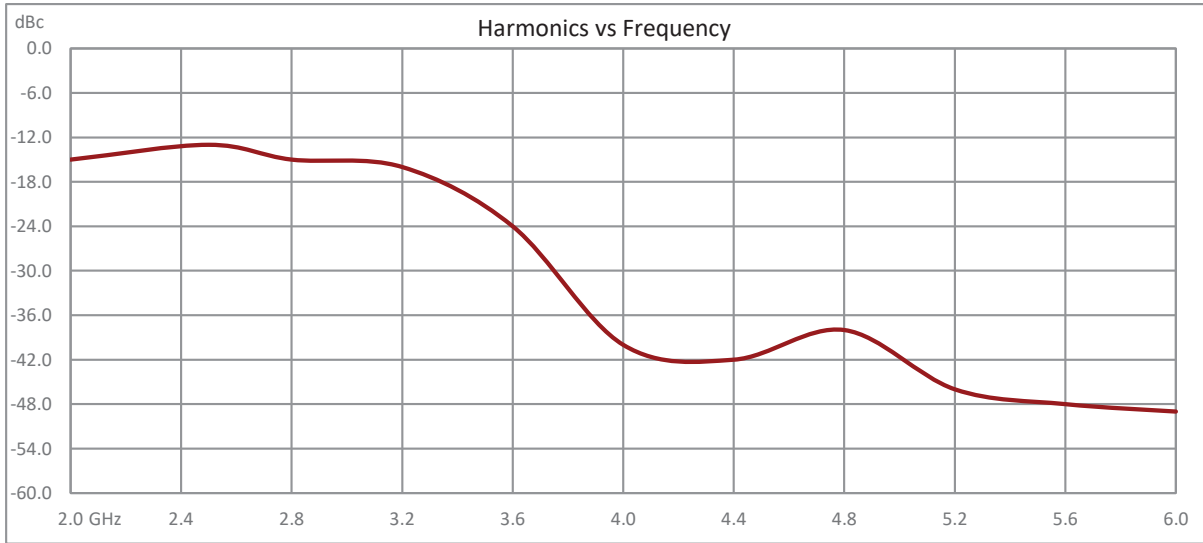

46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA FMAM5067](https://www.fairviewmicrowave.com/high-power-amplifier-40watt-fmam5067-p.aspx)

URL: <https://www.fairviewmicrowave.com/high-power-amplifier-40watt-fmam5067-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMAM5067 CAD Drawing

46 dB Gain High Power GaN Amplifier at 40 Watt Psat Operating from 2 GHz to 6 GHz with SMA

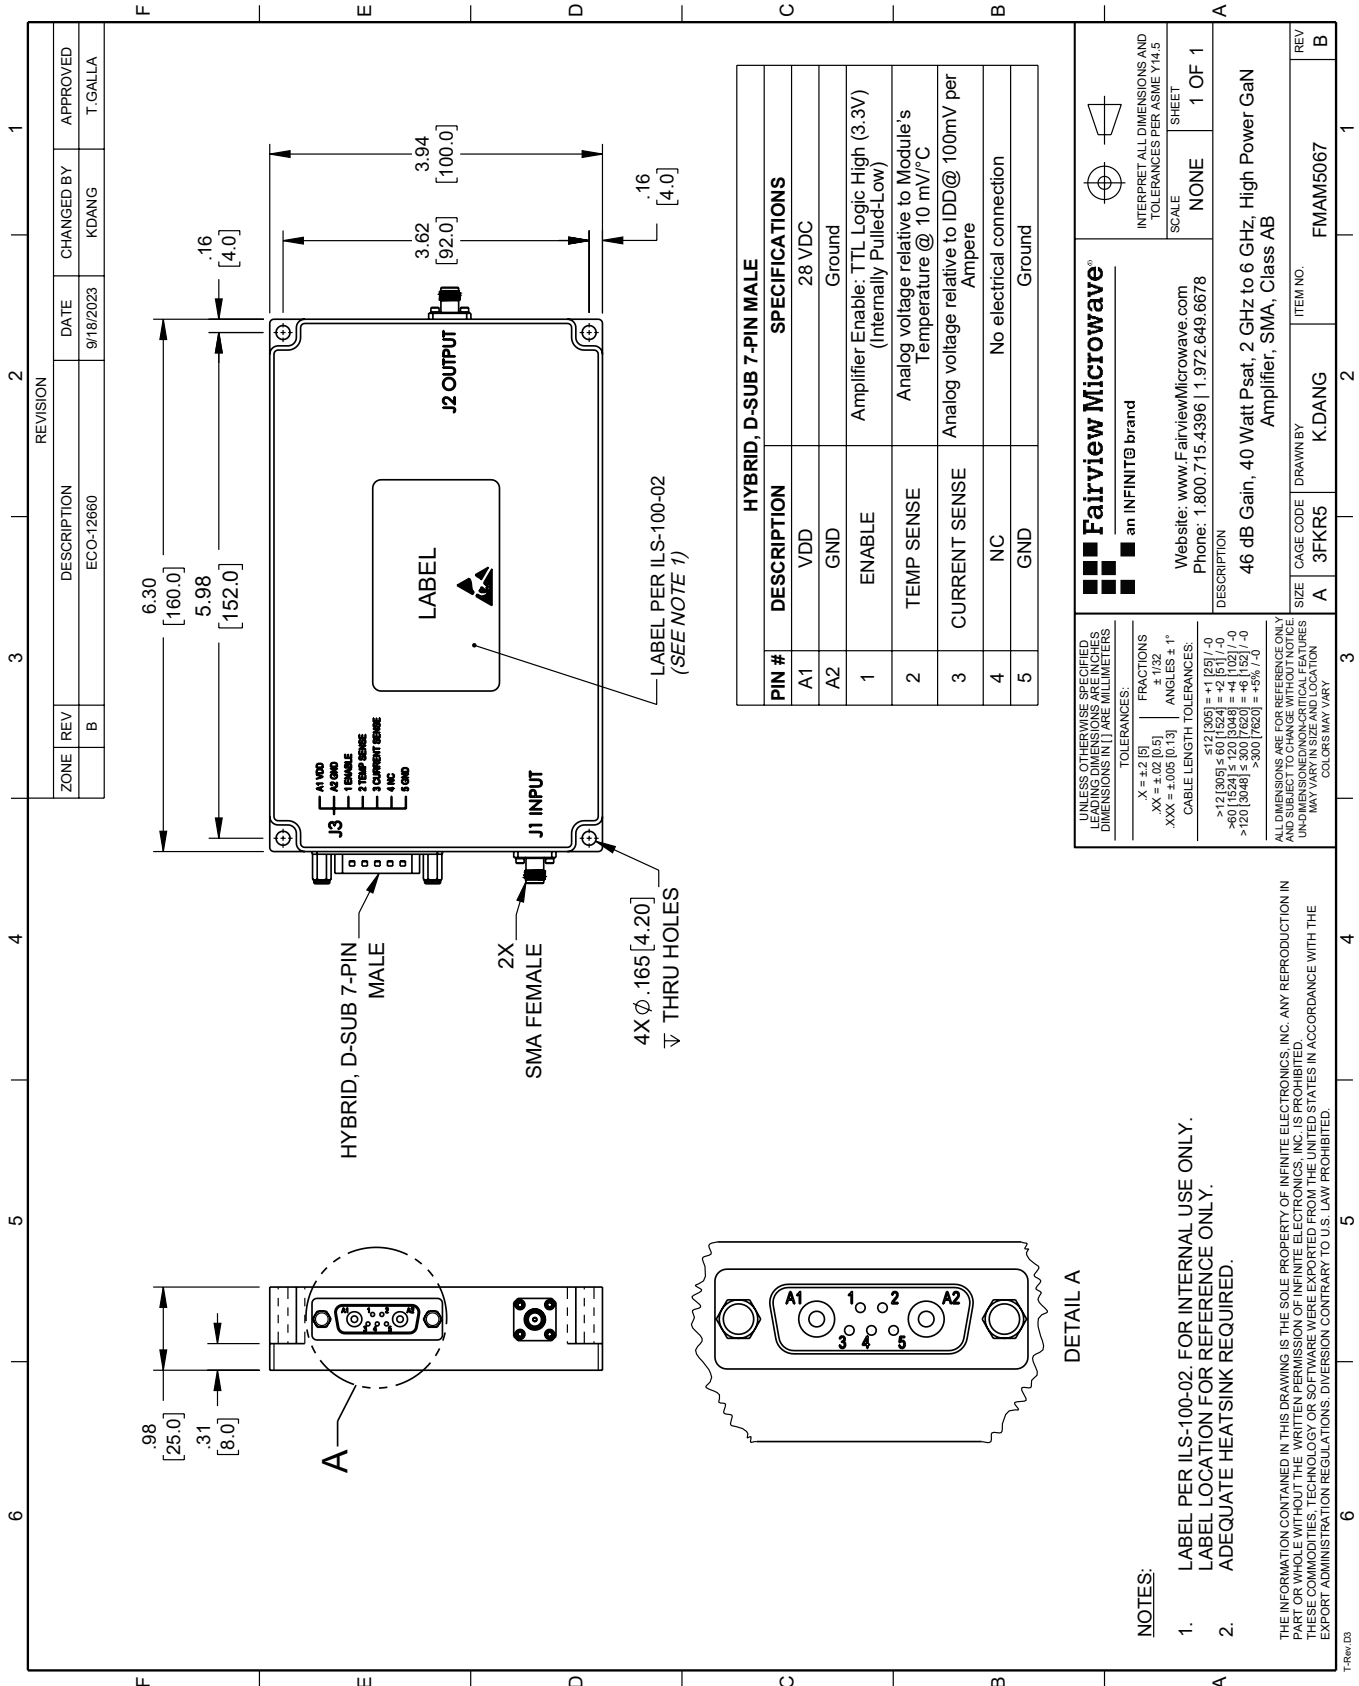

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
B		ECO-12680	9/18/2023	KDANG	T.GALLA

HYBRID, D-SUB 7-PIN MALE		SPECIFICATIONS
PIN #	DESCRIPTION	
A1	VDD	28 VDC
A2	GND	Ground
1	ENABLE	Amplifier Enable; TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP SENSE	Analog voltage relative to Module's temperature @ 10 mV/°C
3	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
4	NC	No electrical connection
5	GND	Ground

Fairview Microwave®
an INFINITI® brand

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE
SHEET: 1 OF 1

Website: www.FairviewMicrowave.com
Phone: 1.800.715.4396 | 1.972.649.6678

DESCRIPTION: 46 dB Gain, 40 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB



ITEM NO: FMAM5067

SIZE: A
CAGE CODE: 3FKR5
DRAWN BY: K.DANG

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [0.5]
 .XXX = ±.005 [0.13]
 FRACTIONS: ± 1/32
 ANGLES ± 1°
 CABLE LENGTH TOLERANCES:
 ≤ 12 [305] ± .60 [15.24] = ±.2 [5] / -0
 > 12 [305] ± .60 [15.24] = ±.2 [5] / -0
 > 60 [1524] ± 1.20 [30.48] = ±.4 [10.27] / -0
 > 120 [3048] ± 2.40 [60.96] = ±.8 [20.32] / -0
 > 300 [7620] ± 6.00 [152.4] = ±.2 [5] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

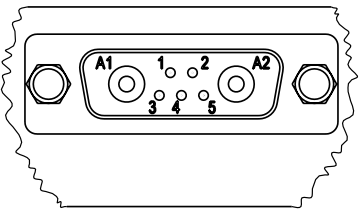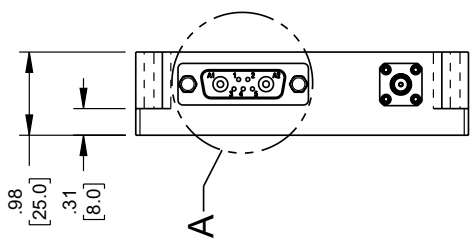

- NOTES:**
- LABEL PER ILS-100-02. FOR INTERNAL USE ONLY. LABEL LOCATION FOR REFERENCE ONLY.
 - ADEQUATE HEATSINK REQUIRED.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.