

1.25W Psat, 32 dB Gain, 0.5 GHz to 6 GHz, AC Powered Broadband GaAs Power Amplifier with Heatsink, Bench-Top, 110/240VAC, SMA

The FMAMA5093 is an AC powered Bench-Top Power Amplifier that operates across a broadband frequency range from 500 MHz to 6 GHz. This 50 Ohm linear design utilizes GaAs semiconductor technology and exhibits impressive typical performance that includes 32 dB gain, +30 dBm P1dB, and +31 dBm Psat. Maximum RF input power (CW) is +5 dBm. The rugged MIL Grade aluminium package is finished in gray paint with SMA Female connectors at the RF input and output ports, and an indicator light on the front panel. The rear panel supports an IEC 320-C14 AC power socket (IEC 320-C13 plug required), a fuse compartment, an On/Off switch, and a dedicated package common ground connector. The module supports a wide operating AC voltage range from 110VAC to 240VAC with 60 mA supply current. Designed for high reliability, the package supports an integrated heatsink and cooling fan and is suitable for outdoor operation (moisture exposure dependent on temperature and humidity conditions). The amplifier has an operational temperature range from -40°C to +85°C and meets a series of environmental test conditions including Altitude, Vibration, Humidity, and Shock.

Electrical Specifications

(TA = +25°C, AC Current = 60 mA)

Description	Min	Typ	Max	Unit
Frequency Range	0.5		6	GHz
Small Signal Gain	28	32		dB
Gain Flatness		±2		dB
Gain Variation Over Temp.		±1.5		dB
Input Power (CW)			+5	dBm
Pout at Sat.		+31		dBm
Output Power (1 dB Compress. Point)	+28	+30		dBm
Reverse Isolation		60		dB
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR		1.8:1	2.3:1	
Supply Current (AC 110-220V)		60		mA
Operating Temperature Range	-40		+85	°C

Performance by Frequency

Biasing Up Procedure

- Connect input and output with 50 Ohm source and load with in band return loss better than 10dB.
- Step 1 Connect AC Plug
 - Step 2 Flip switch to "ON" position
 - Step 3

Power OFF Procedure

- Step 1 Flip switch to "OFF" position
- Step 2 Remove AC Plug
- Step 3 Remove RF Connection

Absolute Maximum Rating

Parameter	Rating
Operating Voltage	110 to 240V AC
RF Input Power (RFIN)*	+5dBm

*Note: Maximum RF input power is defined to protect the amplifier from damage. Input power may be increased at the users own risk to achieve the full output power of the amplifier. Please reference gain and power curves and monitor the temperature.



Features:

- AC Powered Bench-Top Power Amplifier
- 500 MHz to 6 GHz
- Highly Linear GaAs Semiconductor Design
- Output Psat +31 dBm typ
- Output P1dB +30 dBm typ
- Small Signal Gain 32 dB typ
- Input VSWR 1.8:1 typ
- AC Supply 110-240VAC @ 60 mA
- Max RF Input Power (CW) +5 dBm
- 50 Ohm Design
- Integrated Heatsink and Cooling Fan
- RF Input and Output SMA Female Connectors
- On/Off Switch with Indicator Light
- Operational Temperature Range -40°C to +85°C
- Rugged MIL Grade Aluminum Package Design with Gray Paint finish
- Guaranteed Environmental Test Conditions Altitude, Vibration, Humidity, Shock

Applications:

- Test & Measurement
- 5G Communication
- Wireless Infrastructure
- Military & Commercial Communications
- Military Electronic Systems
- Research & Development
- Microwave Radio
- VSAT
- Fiber Optics

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Mechanical Specifications

Size

Length	7.72 in [196.09 mm]
Width	7.77 in [197.36 mm]
Height	3.54 in [89.92 mm]
Weight	3 lbs [1.36 kg]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-50 to +105 deg C
Humidity	100% RH at 35oC, 95% RH at 40°C
Shock	20G for 11 msec half sinewave, 3 axis both directions
Vibration	25g RMA (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 ft

Compliance Certifications

 (see [product page](#) for current document)

Plotted and Other Data

Notes:


- Values at 25 °C, sea level

Amplifier Power-up Precautions


- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 500Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Typical Performance Data


Gain@+25°C

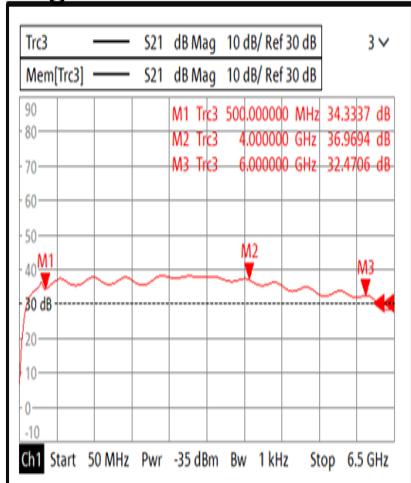


Input VSWR@+25°C

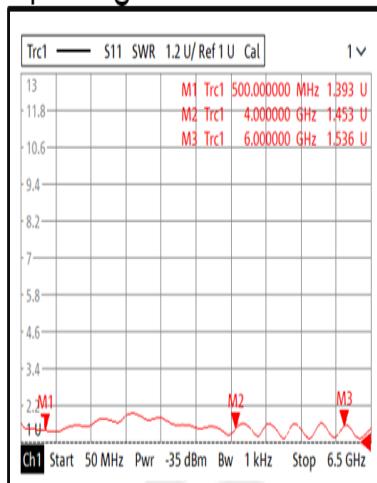


Isolation@+25°C

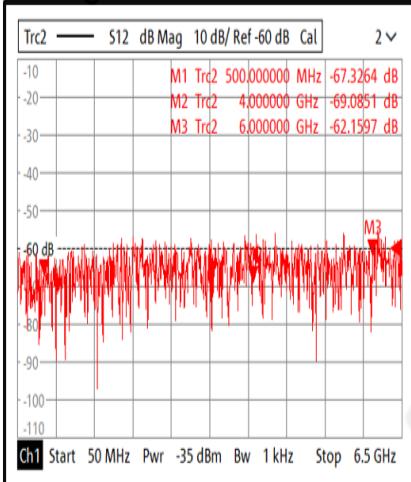


Gain@-40°C

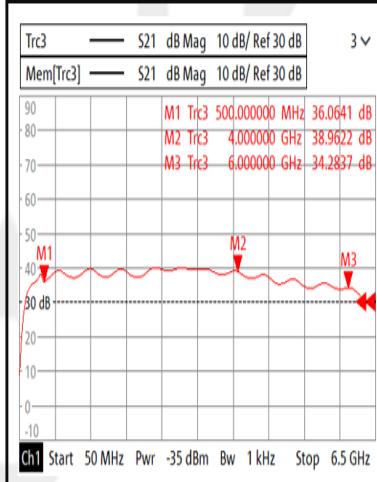


Input VSWR@-40°C

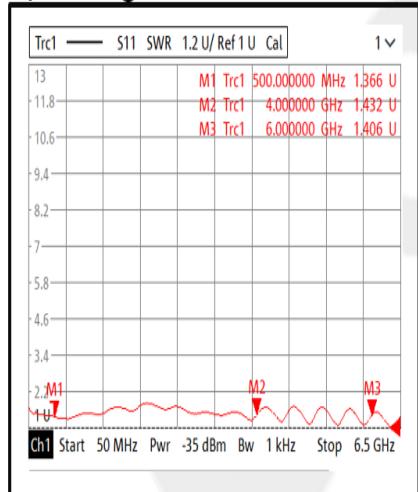


Isolation@-40°C

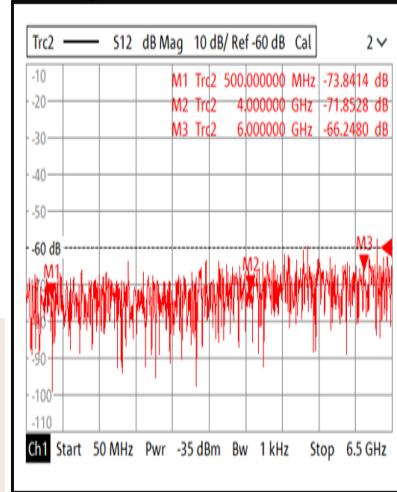


Gain@+85°C

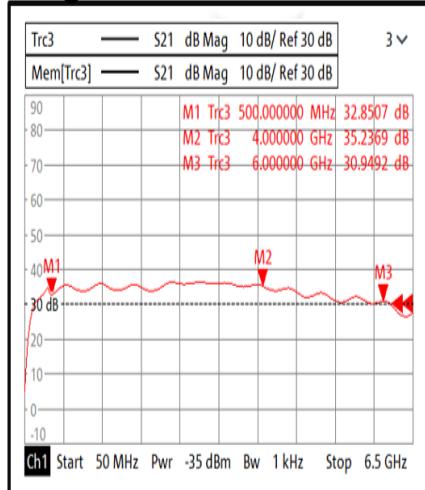


Input VSWR@+85°C

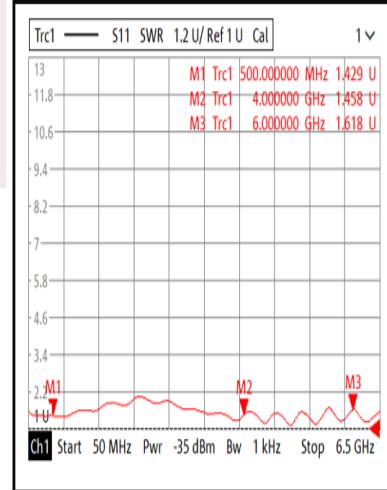


Isolation@+85°C

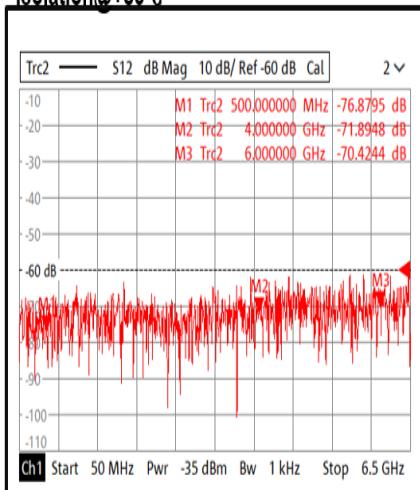


Gain vs. Output Power

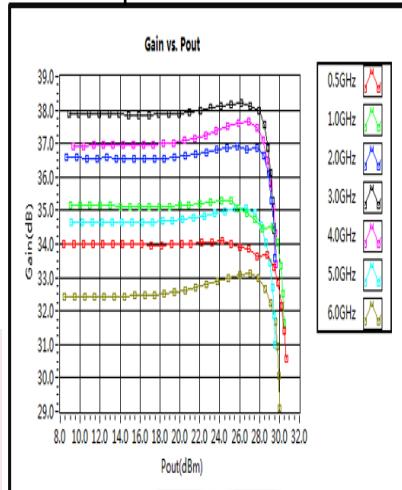


P1dB & P3dB vs. Frequency

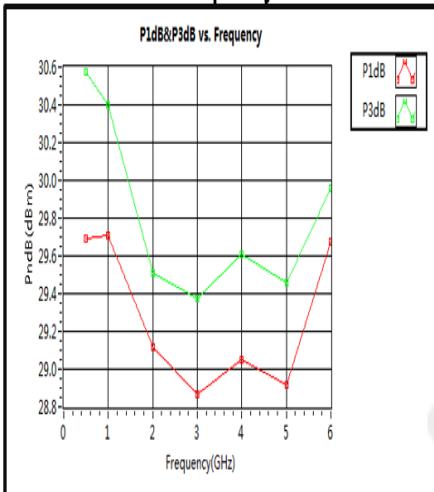


Saturated Power vs. Frequency

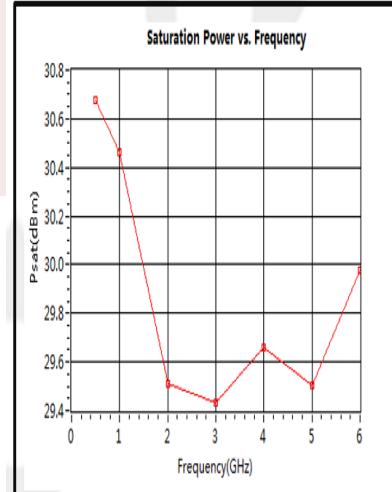


Pout vs. Pin

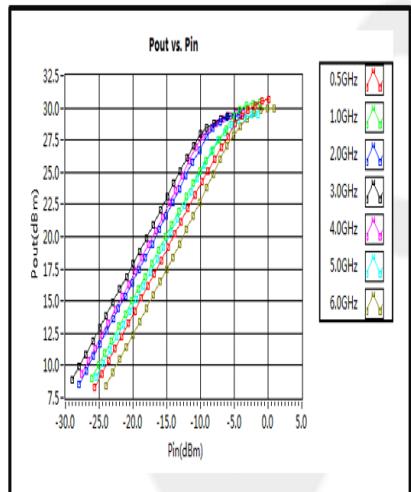


Delta IM3 vs. Pout

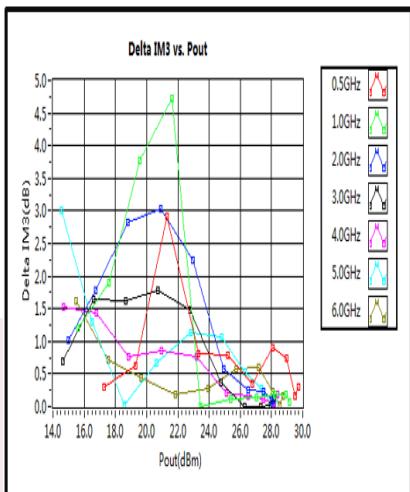


Left IM3 vs. Pout

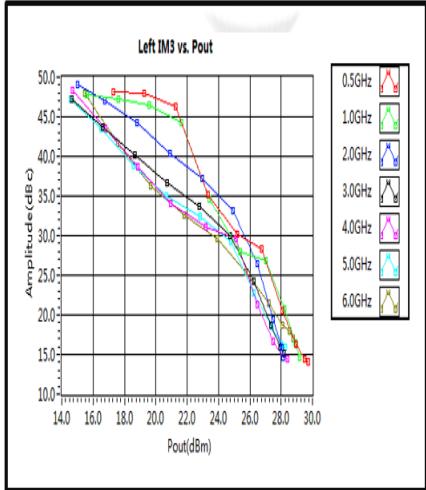


Right IM3 vs. Pout

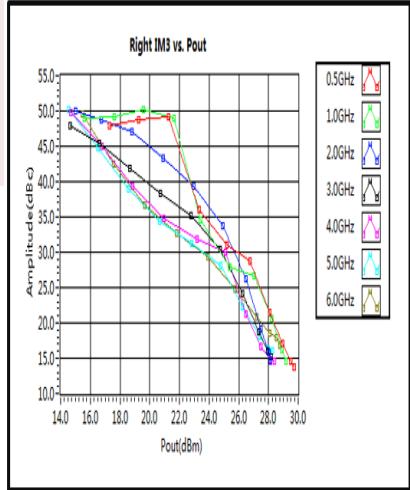


2nd Harmonic Wave Output Power

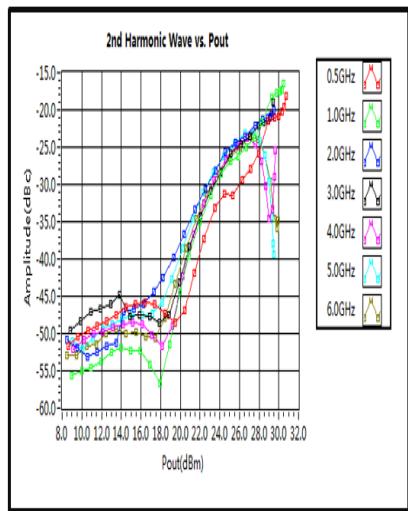

3rd Harmonic Wave Output Power

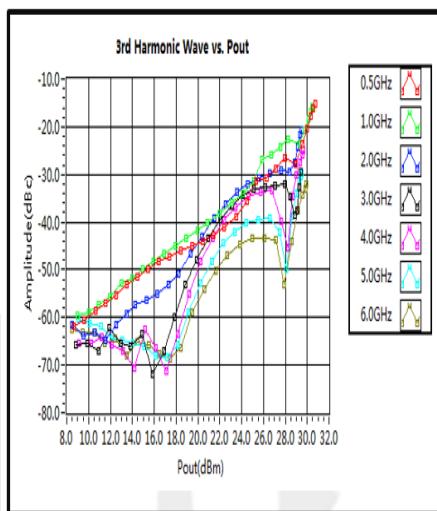

4th Harmonic Wave Output Power

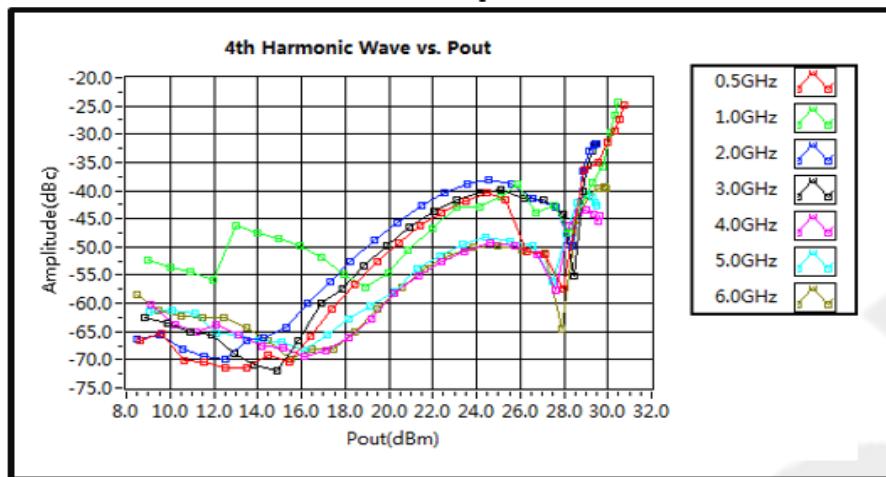


1.25W Psat, 32 dB Gain, 0.5 GHz to 6 GHz, AC Powered Broadband GaAs Power Amplifier with Heatsink, Bench-Top, 110/240VAC, SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [1.25W Psat, 32 dB Gain, 0.5 GHz to 6 GHz, AC Powered Broadband GaAs Power Amplifier with Heatsink, Bench-Top, 110/240VAC, SMA FMAMA5093](https://www.fairviewmicrowave.com/medium-power-amplifier-3watt-32db-fmama5093-p.aspx)

URL: <https://www.fairviewmicrowave.com/medium-power-amplifier-3watt-32db-fmama5093-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

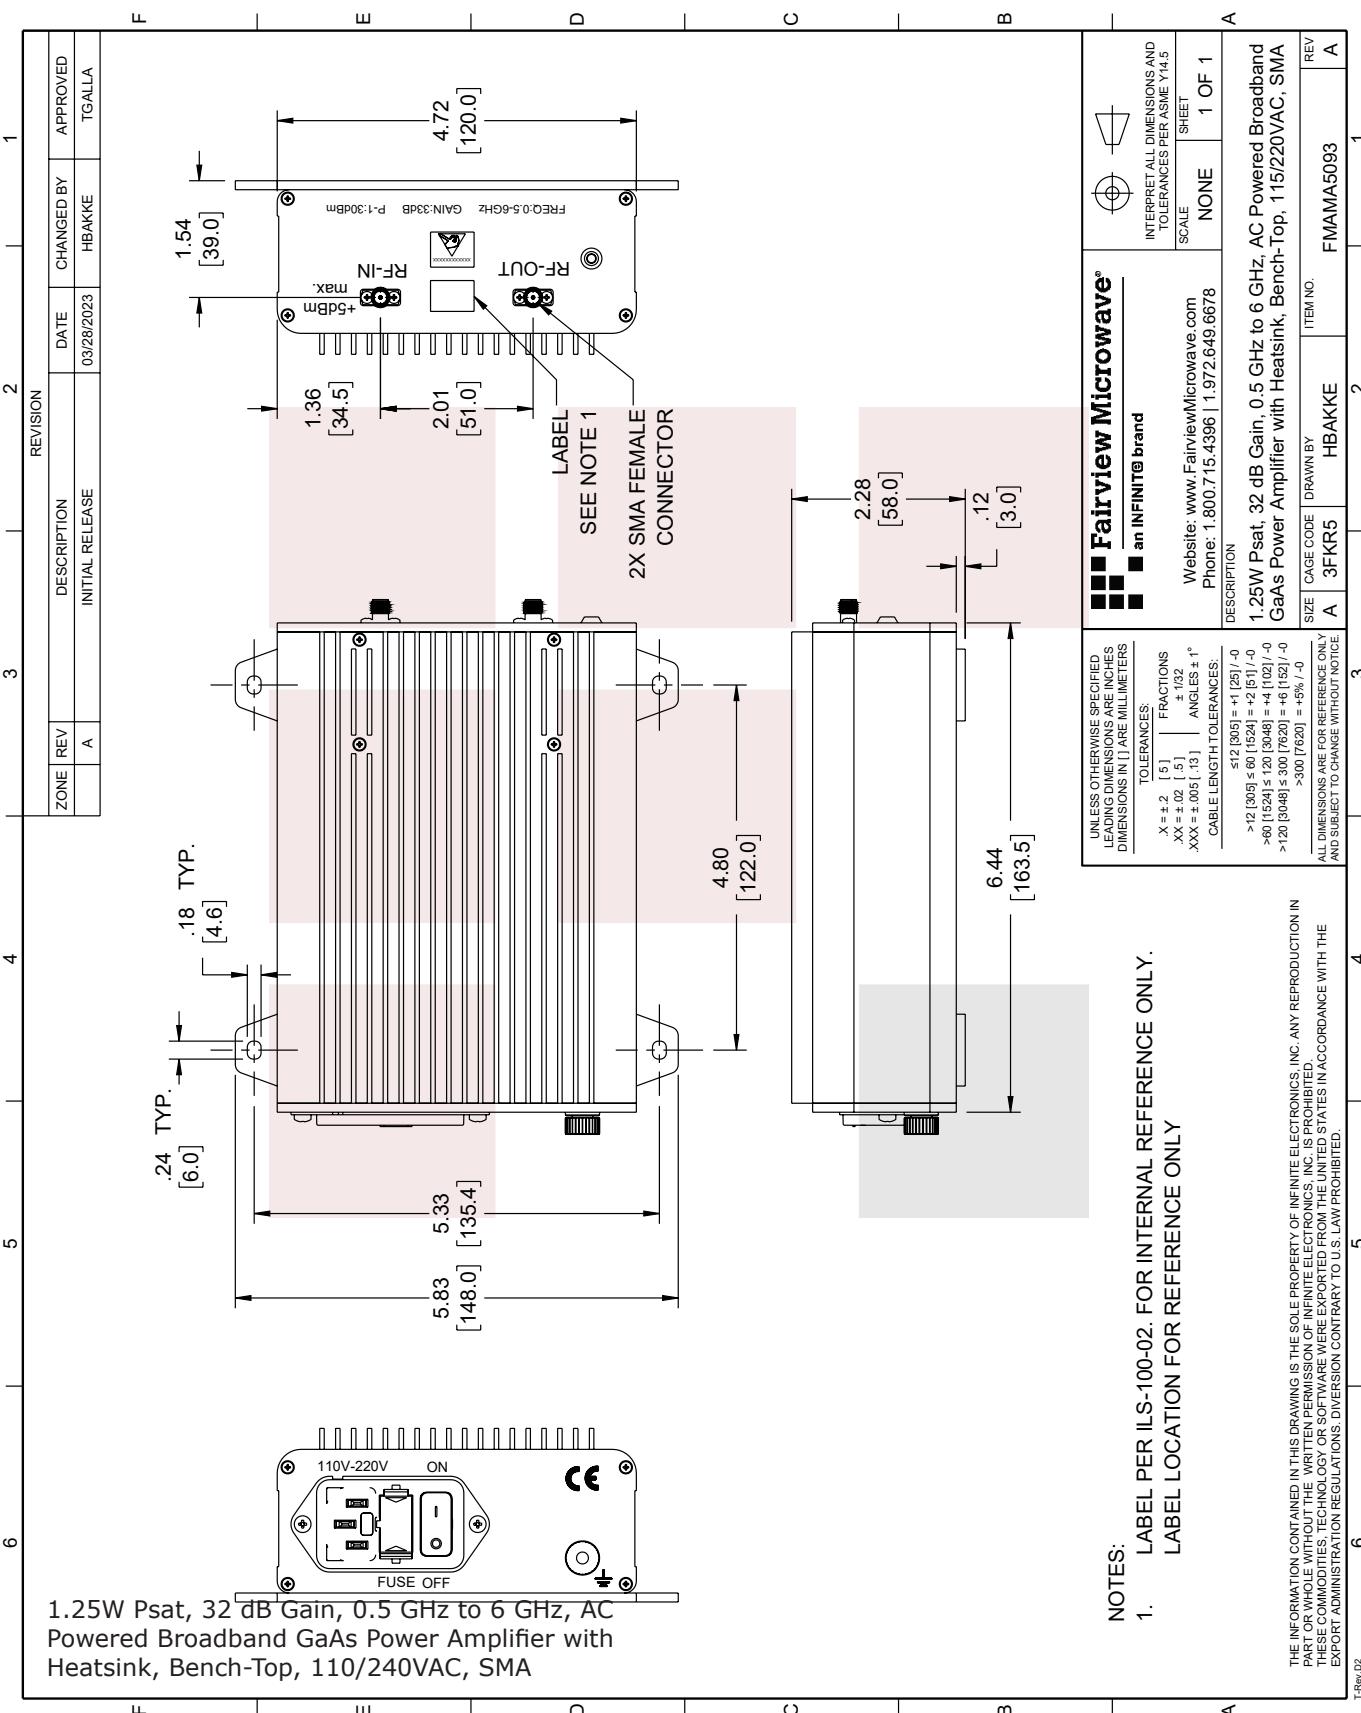

1.25W Psat, 32 dB Gain, 0.5 GHz to 6 GHz, AC Powered Broadband GaAs Power Amplifier with Heatsink, Bench-Top, 110/240VAC, SMA