

A/B Coaxial DC to 1,000 MHz Electro-Mechanical Relay Switch, 5W, 12V, BNC

The FMSW1000 is an A/B coaxial relay switch that operates from DC to 1 GHz and has a rating of 5 Watts input power (CW). Electrical performance includes 0.7 dB max insertion loss, 50 dB min isolation with +12 Vdc operating voltage. Performance is guaranteed over -20°C to +60°C and the switch assembly is RoHS compliant. The package interface uses solder terminals and BNC female connectors.



Electrical Specifications

Switch Type		A/B Coaxial		
Description	Min	Typ	Max	Units
Frequency Range	DC		1,000	MHz
Impedance		50		Ohms
Operating Voltage		12		Volts
Actuating Current @ 12 Volts			45	mA
VSWR			1.6:1	
Insertion Loss			0.7	dB
Isolation	50			dB
Input Power (CW)			5	Watts
Switching Time			15	ms

Electrical Specification Notes:

Max input power rated for common to switched port.
 Max power of 0.5W (CW) for switched to common port.

Mechanical Specifications

Size	
Length	2.88 in [73.15 mm]
Width/Diameter	1.5 in [38.1 mm]
Height	0.88 in [22.35 mm]
Package Type	Connectorized

Connectors

RF Connector Type	BNC Female
Control Connector	Solder Pin

Environmental Specifications

Temperature

Operating Range	-20 to +60 deg C
Storage Range	-30 to +100 deg C

Humidity	95% relative humidity max
----------	---------------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Features:


- A/B Coaxial Relay Switch
- DC to 1 GHz
- Insertion Loss 0.7 dB max
- Isolation 50 dB min
- Max Power 5 Watts (CW)


Applications:

- Test & Measurement
- Communications System
- Instrumentation

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

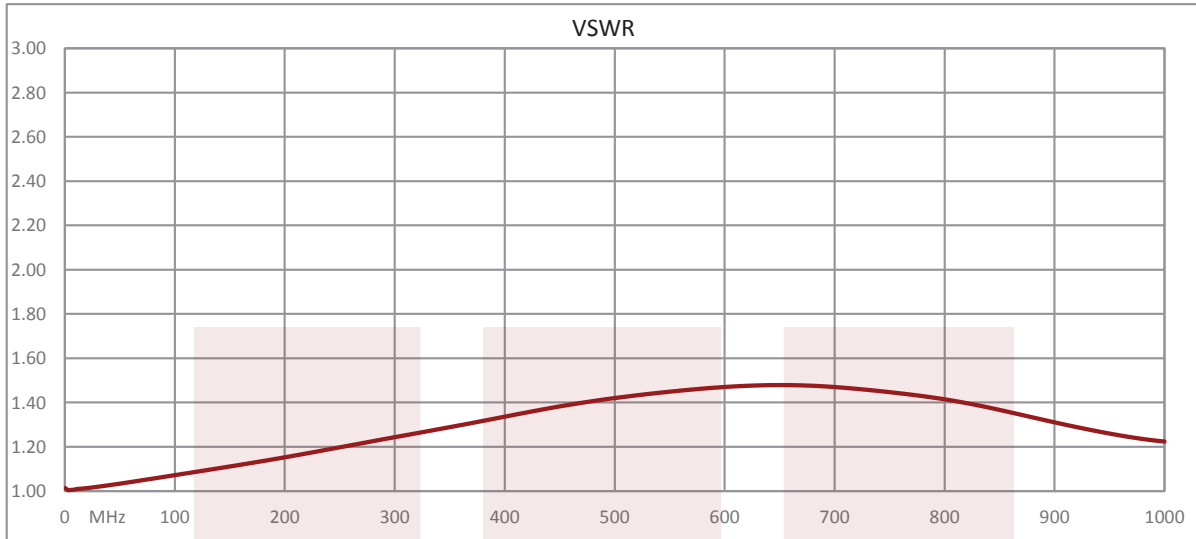

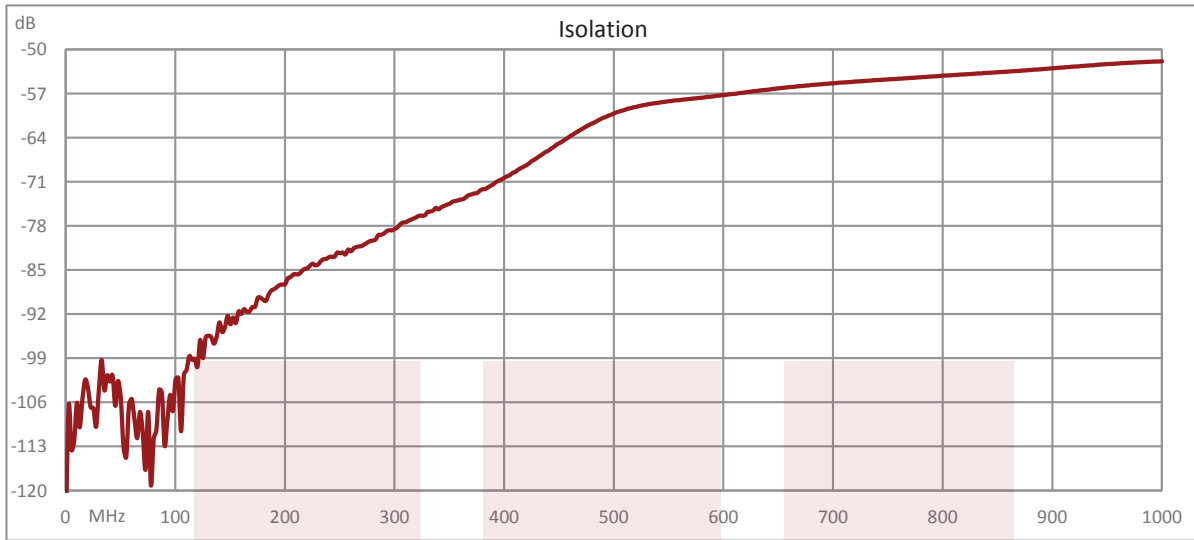


A/B Coaxial DC to 1,000 MHz Electro-Mechanical Relay Switch, 5W, 12V, BNC from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [A/B Coaxial DC to 1,000 MHz Electro-Mechanical Relay Switch, 5W, 12V, BNC FMSW1000](#)

URL: <https://www.fairviewmicrowave.com/a-b-coaxial-dc-to-1000-mhz-electro-mechanical-relay-switch-fmsw1000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

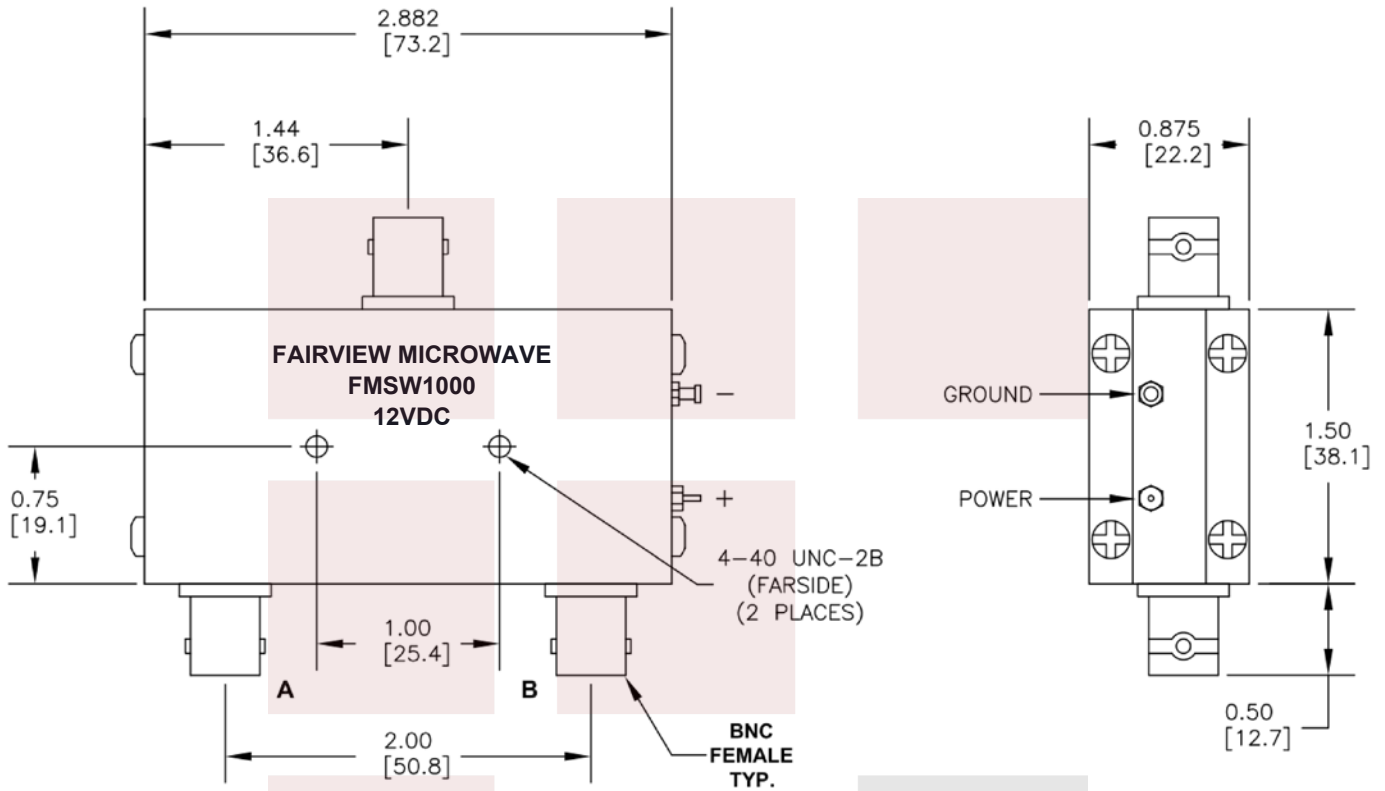

ACTIVE PORT	CONNECTED GROUND	DC POWER
A	YES	OFF
B	YES	ON

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave RF COMPONENTS ON DEMAND. <i>Done!</i>		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
TITLE A/B Coaxial DC to 1,000 MHz Electro-Mechanical Relay Switch, 5W, 12V, BNC		DWG NO FMSW1000		CAGE CODE 3FKR5		
		CAD FILE 05/21/18	SHEET 1 OF 1	SCALE N/A	SIZE A	7361