

# FMAD1040 DATA SHEET

# Low PIM 7/16 DIN Male to 7/16 DIN Male Adapter Low VSWR

Low PIM 7/16 DIN male to 7/16 DIN male adapter part number FMAD1040 from Fairview Microwave is in-stock and ships same day. This Fairview 7/16 DIN to 7/16 DIN adapter has a male to male gender configuration in a low PIM design. FMAD1040 7/16 DIN male to 7/16 DIN male adapter operates to 8 GHz. The Fairview Microwave RF adapter provides a passive intermodulation of -170 dBc maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

# **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		8	GHz
Return Loss			-21	dB
Passive Intermodulation			-170	dBc
DWV (AC)			3,500	Vrms
Group Delay			100	ps

# **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 1	1 to 5	5 to 8			GHz
Return Loss, Max	-38	-28	-21			dB

Electrical Specification Notes: Values at 25°C, sea level.

# **Mechanical Specifications**

Size	
Length	1.88 in [47.75 mm]
Width	1.25 in [31.75 mm]
Weight	0.35 lbs [158.76 g]

Connector 1	Connector 2		
7/16 DIN Male	7/16 DIN Male		
Standard	Standard		
IEC 169-4	IEC 169-4		
500	500		
32 mm	32 mm		
	7/16 DIN Male Standard IEC 169-4 500		



# **Configuration:**

- 7/16 DIN Male Connector 1
- 7/16 DIN Male Connector 2
- •50 Ohm
- Low PIM Design
- Straight Body Geometry

# Features:

- PIM levels better than -170 dBc
- 7/16 DIN interface meets IEC 169-4
- 200 µin minimum contact plating
- Silver Plated Brass Contact

# **Applications:**

- General Purpose Test
- Low PIM Applications

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Material Specifications**

Description	Connector 1	Connector 2
Туре	7/16 DIN Male	7/16 DIN Male
Contact Material	Brass	Brass
Contact Plating	Silver	Silver
Contact Plating Spec.	200 µin minimum	200 µin minimum
Insulation Material	PTFE	PTFE
Body Material	Brass	Brass
Body Plating	Tri-Metal	Tri-Metal
Body Plating Spec.	100 µin minimum	100 µin minimum
Coupling Nut Material	Brass	Brass
Coupling Nut Plating	Tri-Metal	Tri-Metal
Coupling Nut Plating Spec.	100 µin minimum	100 µin minimum

#### **Environmental Specifications**

**Temperature** Operating Range


-55 to +155 deg C

Compliance Certifications (see product page for current document)

### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

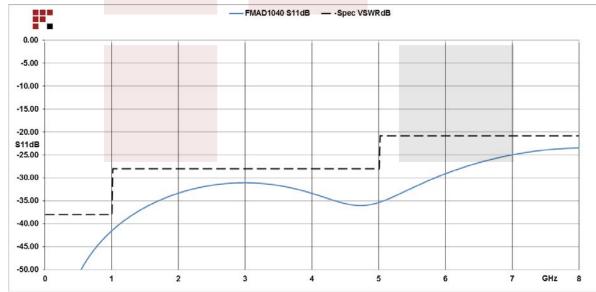





Low PIM 7/16 DIN Male to 7/16 DIN Male Adapter Low VSWR from Fairview Microwave is in-stock and available to ship sameday. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: Low PIM 7/16 DIN Male to 7/16 DIN Male Adapter Low VSWR FMAD1040

URL: https://www.fairviewmicrowave.com/low-pim-7-16-male-7-16-male-adapter-fmad1040-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave necessary to an take any representation or warraty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





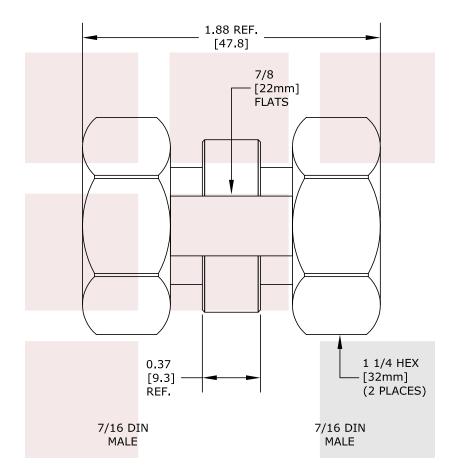

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				IY TIME.	
TITLE Low PIM 7/16 DIN Male to 7/16 DIN Male Adapter Low VSWR	DWG NO FMAD1040			CAGE CODE 3FKR5		
	CAD FILE 022715	SHEET	SCAL	E N/A	SIZE A	150

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689