

FMAD1123 DATA SHEET

2.4mm Female to Female Thru Calibration Kit Component for Precision Up to 50 GHz

2.4mm female to female thru calibration kit component, part number FMAD1123, from Fairview Microwave is in-stock and ships same day. This 2.4mm precision thru circuit can be used for calibration of most vector network analyzers (VNA), cable analyzers or site analyzers. Impedance and VSWR specifications for this 2.4mm thru calibrating component are provided in the datasheet. Precision control of the impedance and electrical length allow for OSLT analyzer calibrations over the complete frequency range of the connector interface provided.

Fairview's 2.4mm thru circuit calibration component FMAD1123 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering for RF, microwave and millimeter wave components allows designers to configure and customize their test solutions however they like. From calibration kit replacement to SOLT / OSLT VNA calibration, Fairview Microwave has the right calibration kit components to meet your needs and ship them same-day.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|------------------|-----|------|--------|-------|
| Frequency Range | DC | | 50 | GHz |
| Impedance | | 50 | | Ohms |
| VSWR | | | 1.15:1 | |
| Electrical Delay | | 66.7 | | ps |
| | | | | |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------|---------|---------|--------|----|----|-------|
| Frequency Range | DC-26.5 | 26.5-40 | 40-50 | | | GHz |
| VSWR, Max | 1.06:1 | 1.1:1 | 1.15:1 | | | |

Electrical Specification Notes: Values at 25° sea level.

Mechanical Specifications

Size

 Length
 0.99 in [25.15 mm]

 Width/Diameter
 0.5 in [12.7 mm]

 Pin Depth
 0 to 0.0015 in

Connector 1

Connector Type 2.4mm Female

Body Material and Plating Beryllium Copper, Gold

Connector 2

Connector Type 2.4mm Female

Connector Body Material and Plating Beryllium Copper, Gold

Environmental Specifications



Features:

- Controlled Impedance
- Replaces Damaged Calibrating Kit Components
- · Controlled Electrical Length
- Precision Interfaces
- In Stock and Ready to Ship

Applications:

- SOLT or OSLT Calibration
- VNA Calibration
- · Device Characterization
- · De-embedding
- Replacement Calibration Kits

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at +25 °C, sea level

2.4mm Female to Female Thru Calibration Kit Component for Precision Up to 50 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 2.4mm Female to Female Thru Calibration Kit Component for Precision Up to 50 GHz FMAD1123

URL: https://www.fairviewmicrowave.com/2.4mm-female-calibration-kit-component-thru-50-ghz-fmad1123-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





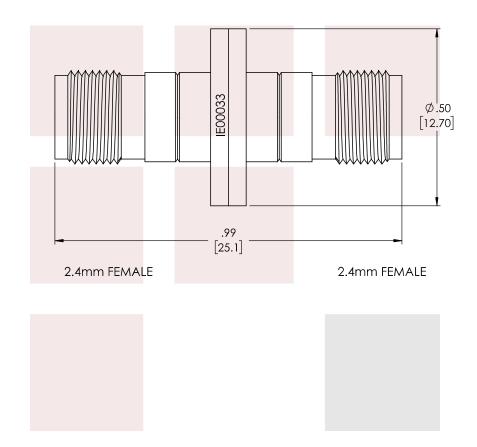

STANDARD TOLERANCES

X ±0.2 XX ±0.01 XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL, 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME, 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|---|---|-------|------|-----------------|--------|--|
| 2.4mm Female to Female Thru Calibration Kit Component for Precision Up to 50 GHz | DWG NO FMAD1123 | | | CAGE CODE 3FKR5 | | |
| | CAD FILE 01/23/18 | SHEET | SCAL | E N/A SIZE A | CN2245 | |