


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



FMSW8034

Features

- Single Pole Double Throw SMT Relay Switch
- DC to 26 GHz Frequency Range
- 2M Cycle Typical Operating Life
- 10W Average Power for Cold Switching @ 26.5 GHz
- Hot Switching Capability
- -25°C to +70°C
- Isolation 55 dB typ
- Insertion Loss 0.6 dB Typ
- VSWR 1.3:1 Typ
- +12Vdc @ 61 mA
- EAR99 Export Compliance
- RoHS & Reach Compliant

Applications

- High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

Description


The FMSW8034 is a single pole double throw electromechanical relay switch that operates from DC to 26 GHz. The design features a latching actuator with 2 coils and has a long and reliable lifespan up to 5M lifecycles typical (at low level) with excellent repeatability and thermal resistance. The innovative micro-mechanical design is in a miniature true surface mount package that's ideal for space limited applications. RF and command ports have gold plated access and the package can be mounted to a PWB using infrared reflow, forced air oven, or hand soldering processes. Impressive typical performance includes 0.6 dB insertion loss, 1.3:1 VSWR, and up to 55 dB isolation. Input power handling is rated up to 40W average power, and operating voltage is +12 Vdc with 61 mA operating current. Performance is guaranteed over -40°C to +85°C and the switch assembly is RoHS and REACH compliant.

Electrical Specifications (TA = +25°C, DC Voltage = 12 Vdc)

- | | |
|--------------------|-------------------|
| Switch Type | SPDT |
| Actuator Type | Failsafe |
| Switching Sequence | Break before Make |
| Actuator Options | Hot Switching |

Description	Min	Typ	Max	Units
Frequency Range	DC		26.5	GHz
Impedance		50		
Operating Voltage	10.5	12	13	Volts
Actuating Current @ 12 Volts		61		mA
VSWR		1.3:1	2:1	
Insertion Loss		0.6	1.6	
Isolation	40	55		dB
Coil Resistance*		195		Ohms
Third Order Intermodulation**		-110		dBc
Input Power (CW) (Average Power for Cold Switching (Reference RF Power Rating Table for Cold Switching))		40		Watts

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



FMSW8034

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC - 3	3 - 6	6 - 12.4	12.4 - 18	18 - 26.5	GHz
VSWR, Max	1.2:1	1.35:1	1.5:1	1.7:1	2:1	
Insertion Loss, Max	0.2	0.4	0.6	1	1.6	dB
Isolation, Min	50	40	40	40	40	dB
Input Power, Typ (Hot Switching)	40	25	3	1	1	Watts

Electrical Specification Notes:


Temperature: +23°C

*Coil Resistance: +/-10%

**Third Order Intermodulation @ 1730 MHz (2 carries 20W)

CAUTION: At high frequency, manual soldering may generate spikes and RF characteristics degradation, due to air gaps between PC board and relay grounds

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



FMSW8034

Operating mode		Failsafe	
Nominal operating voltage (Vdc) (across operating temperature range)		12	(10.5 to 13)
Coil resistance (+/-10%) (Ohms)		195	
Operating current at 23°C (mA)		61	
RF and command ports		gold plated access, infrared reflow, forced air oven or hand soldering (Compatible with "lead free" soldering processes)	
Switching time (Nominal voltage)	Making contacts	Max 5ms, including contact bounce time	
	Breaking contacts	3ms	
Life	Cold switching (Max 120 cycles/min)	1 million cycles (2 million cycles typical at low level)	
	Hot switching (Max 20 cycles/min)	500.000 cycles (1W, impedance 50Ω , V.S.W.R. <1.25)	
Insulation		Dielectric test voltage	300Vrms
		Insulation resistance at 500Vdc	> 100MOhms
Environmental protection		RoHS compliant with the directive 2011/65 & its amendment 2015/863 Waterproofness according to IEC 60529 / IP64	
Mass		7.5g max.	
Operating temperature range (°C) (With no icing nor condensation)		-25 to +70 (1)	
Storage temperature range (°C)		-55 to +85	
Shocks (According to MIL STD 202, method 213B, Cond C)		100g / 6ms, ½ sine No change of state	
Sine vibration (MIL STD 202, method 204)		Condition D : 10-2000Hz, 20g Operating Condition G : 10-2000Hz, 30g Non-operating	

(1) : If coil remains permanently supplied under -25°C, internal condensation may occur and generate contact failures. For such special applications from -25°C to -40°C, please contact us.

Mechanical Specifications


Size

Length	0.591 in [15.01 mm]
Width/Diameter	0.5 in [12.7 mm]
Height	0.472 in [11.99 mm]
Weight	0.017 lbs [7.71 g]
Package Type	Surface Mount
Operating Life	2,000,000 Cycles

Connectors

RF Connector Type	SMT
-------------------	-----

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



FMSW8034

Environmental Specifications

Temperature

Operating Range

-25 to +70 deg C

Storage Range

-55 to +85 deg C

Construction

Waterproof IAW IEC60529 / IP64

Shock

MIL STD 202, method 213B, Cond C, 100g / 6ms, ½ sine No change of state

Sine Vibration


Condition D : 10-2000Hz, 20g Operating, Condition G : 10-2000Hz, 30g Non-operating

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:


Typical Performance Data

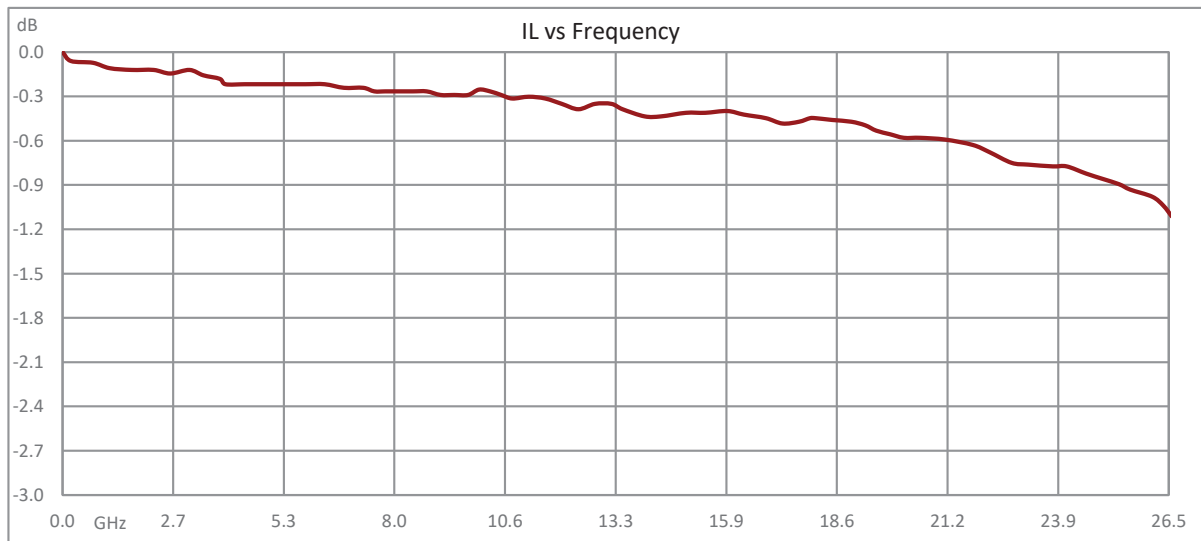


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles




FMSW8034

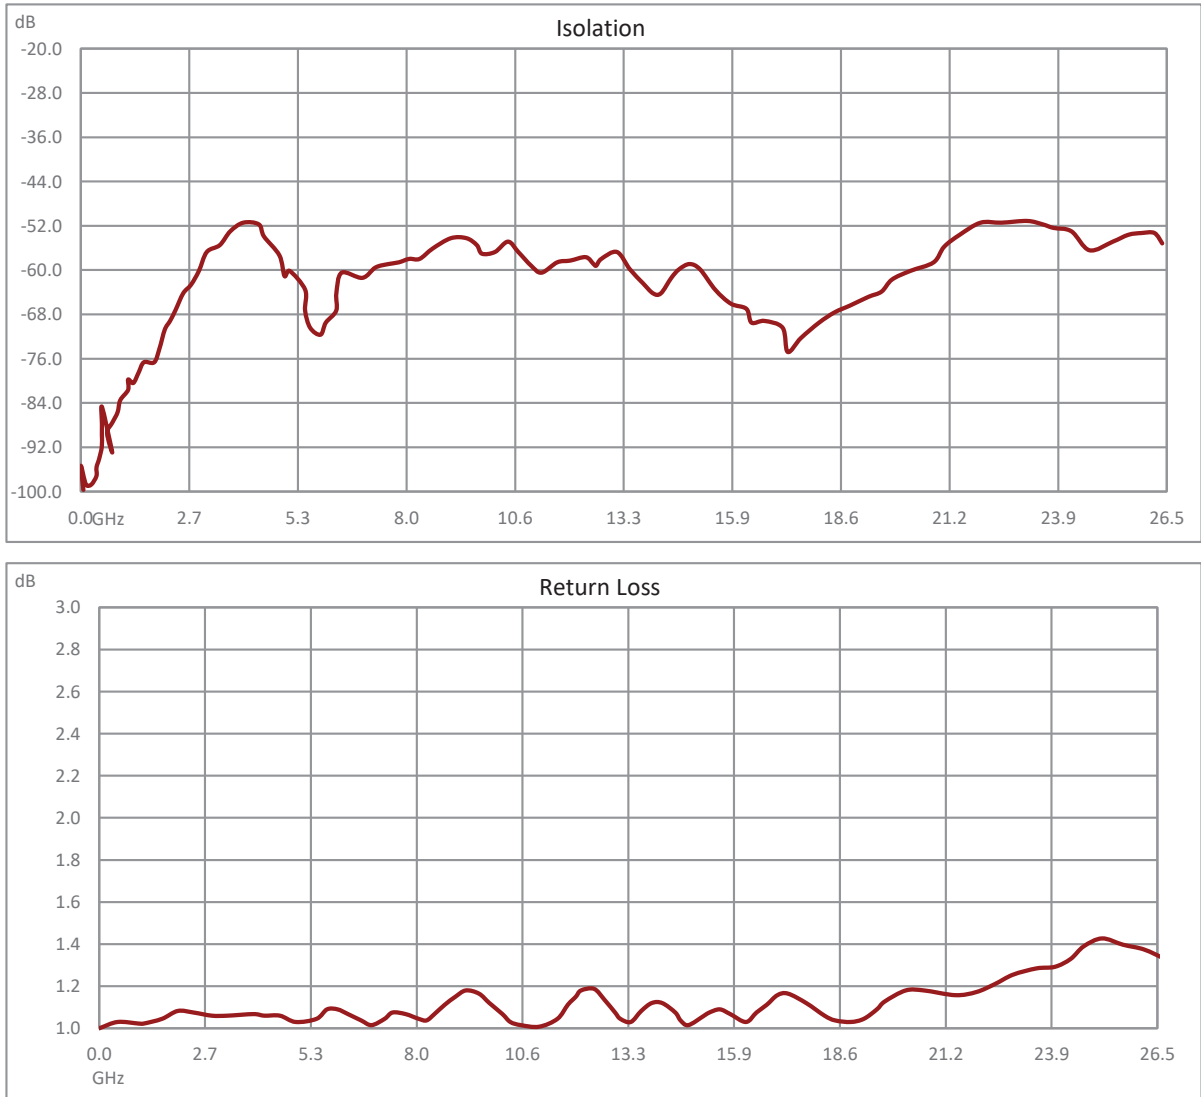

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles




FMSW8034

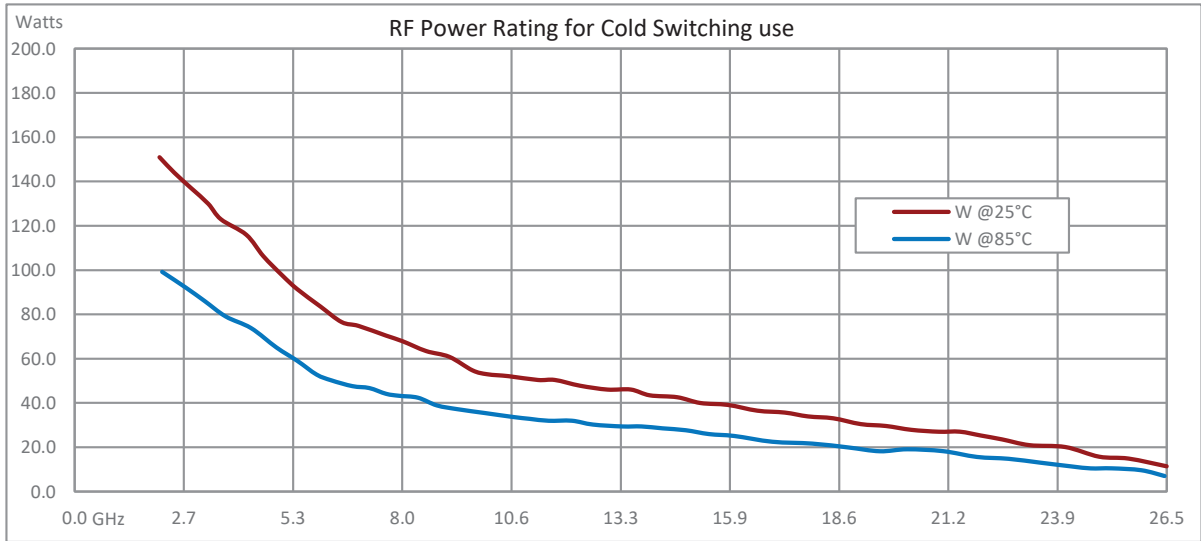


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles


FMSW8034



Video shadow of the relay

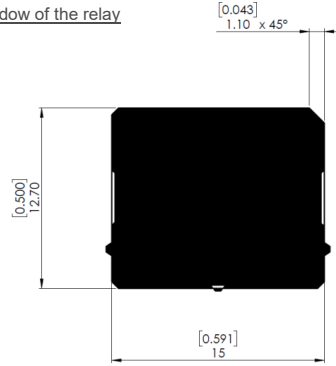

Aspiration area



All dimensions are in millimeters [inches].

PC BOARD MOUNTING

Substrate Types


Recommended substrates are ROGERS RO4003.,
Thickness 0.508 mm Cu double side 17.5µm.
Recommended total thickness of RF tracks
(copper over thickness + plating) : 40µm.
Other substrates may be used

Board layout general outline


DXF or GERBER format file
available upon request

Relay soldering


DXF format file available upon request



Optional fixing system : 2 screws M1.2

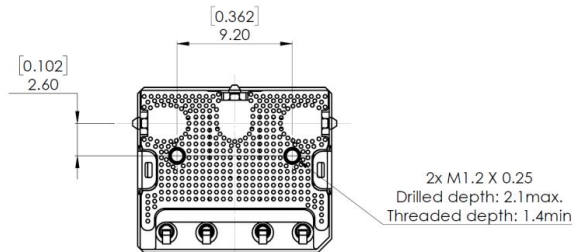

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



FMSW8034

RECOMMENDED SOLDERING PROCEDURE

A – Soldering procedure using automatic pick and place equipment

1-Solder paste :

R516 series are « Lead Free », and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63–Pb35–Ag2. RADIALL recommends using a « no clean - low residue » solder cream (5% solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.
Note : Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.

2-Solder paste deposition :


Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are available upon request, for a thickness of the silk-screen printing of 0.15 mm (0.006 ").

3-Placement of the component :

For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically +/- 0.1mm (+/-0.004"). Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used. RADIALL does not recommend using adhesive agents on the component or on the PCB.

4-Soldering : infra-red process

Please follow the RADIALL recommended max temperature profile for infra-red reflow or forced air convection :

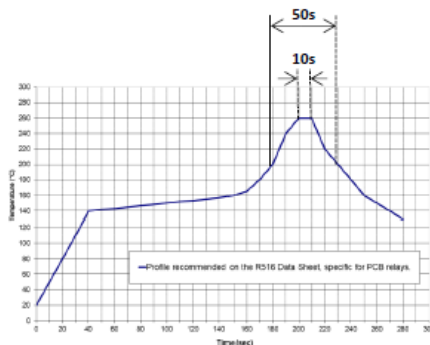

Higher temperature (>260°C) and longer process duration would damage permanently the switches.

5-Cleaning procedure :

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.



In-line cleaning process, spraying, immersion, especially under temperature, may cause a risk of degradation of internal contacts. For such cleaning process please contact us.

6-Quality check :

Verify by visual inspection that the component is centred on the mounting pads.
Solder joints : verify by visual inspection that the formation of meniscus on the pads are proper.

B – Soldering procedure by manual operation



: manual soldering is not recommended for high frequencies, as it generates resonance and lower RF characteristics due to gaps between PC board and relay grounds..

1-Solder paste and flux deposition :

Refer to chapter A – 1
Deposit a thin layer of flux on solder paste area.
Allow the flux to evaporate a few seconds before applying the solder paste, this will prevent dilution of the paste.

2-Solder paste deposition :

RADIALL recommends depositing a small amount of solder paste on solder pad area by syringe, according to the manual soldering pattern (available upon request).
Be careful, not to apply solder paste outside of the zone area.

3-Placement of the component :

During manipulation, avoid contaminating gold surfaces by contact with fingers.
Place the component on the mounting zone by pressing on the top of the relay lid.

4-Hand soldering :

Iron wattage 30 to 60 W.
To keep better RF characteristics, apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay.
If possible, fix the ground plane of the relay on the board with two M1.2 screws before the soldering stage. On each side of the central RF access, the RF body edge must be soldered to the ground of the PC board. To improve RF characteristics and avoid soldering the RF body on the ground, a conductive gasket may be used (please contact us for detailed application note).

5-Cleaning procedure :


Refer to chapter A – 5.

6-Quality check:

Verify by visual inspection that component is centred on the mounting pads.
Solder joints : verify by visual inspection that there is no solder excess on the RF pads.

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

FMSW8034



SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles FMSW8034](https://www.fairviewmicrowave.com/spdt-failsafe-26.5-ghz-electro-mechanical-relay-switch-10w-12v-hot-switching-smt-fmsw8034-p.aspx)

URL: <https://www.fairviewmicrowave.com/spdt-failsafe-26.5-ghz-electro-mechanical-relay-switch-10w-12v-hot-switching-smt-fmsw8034-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMSW8034 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

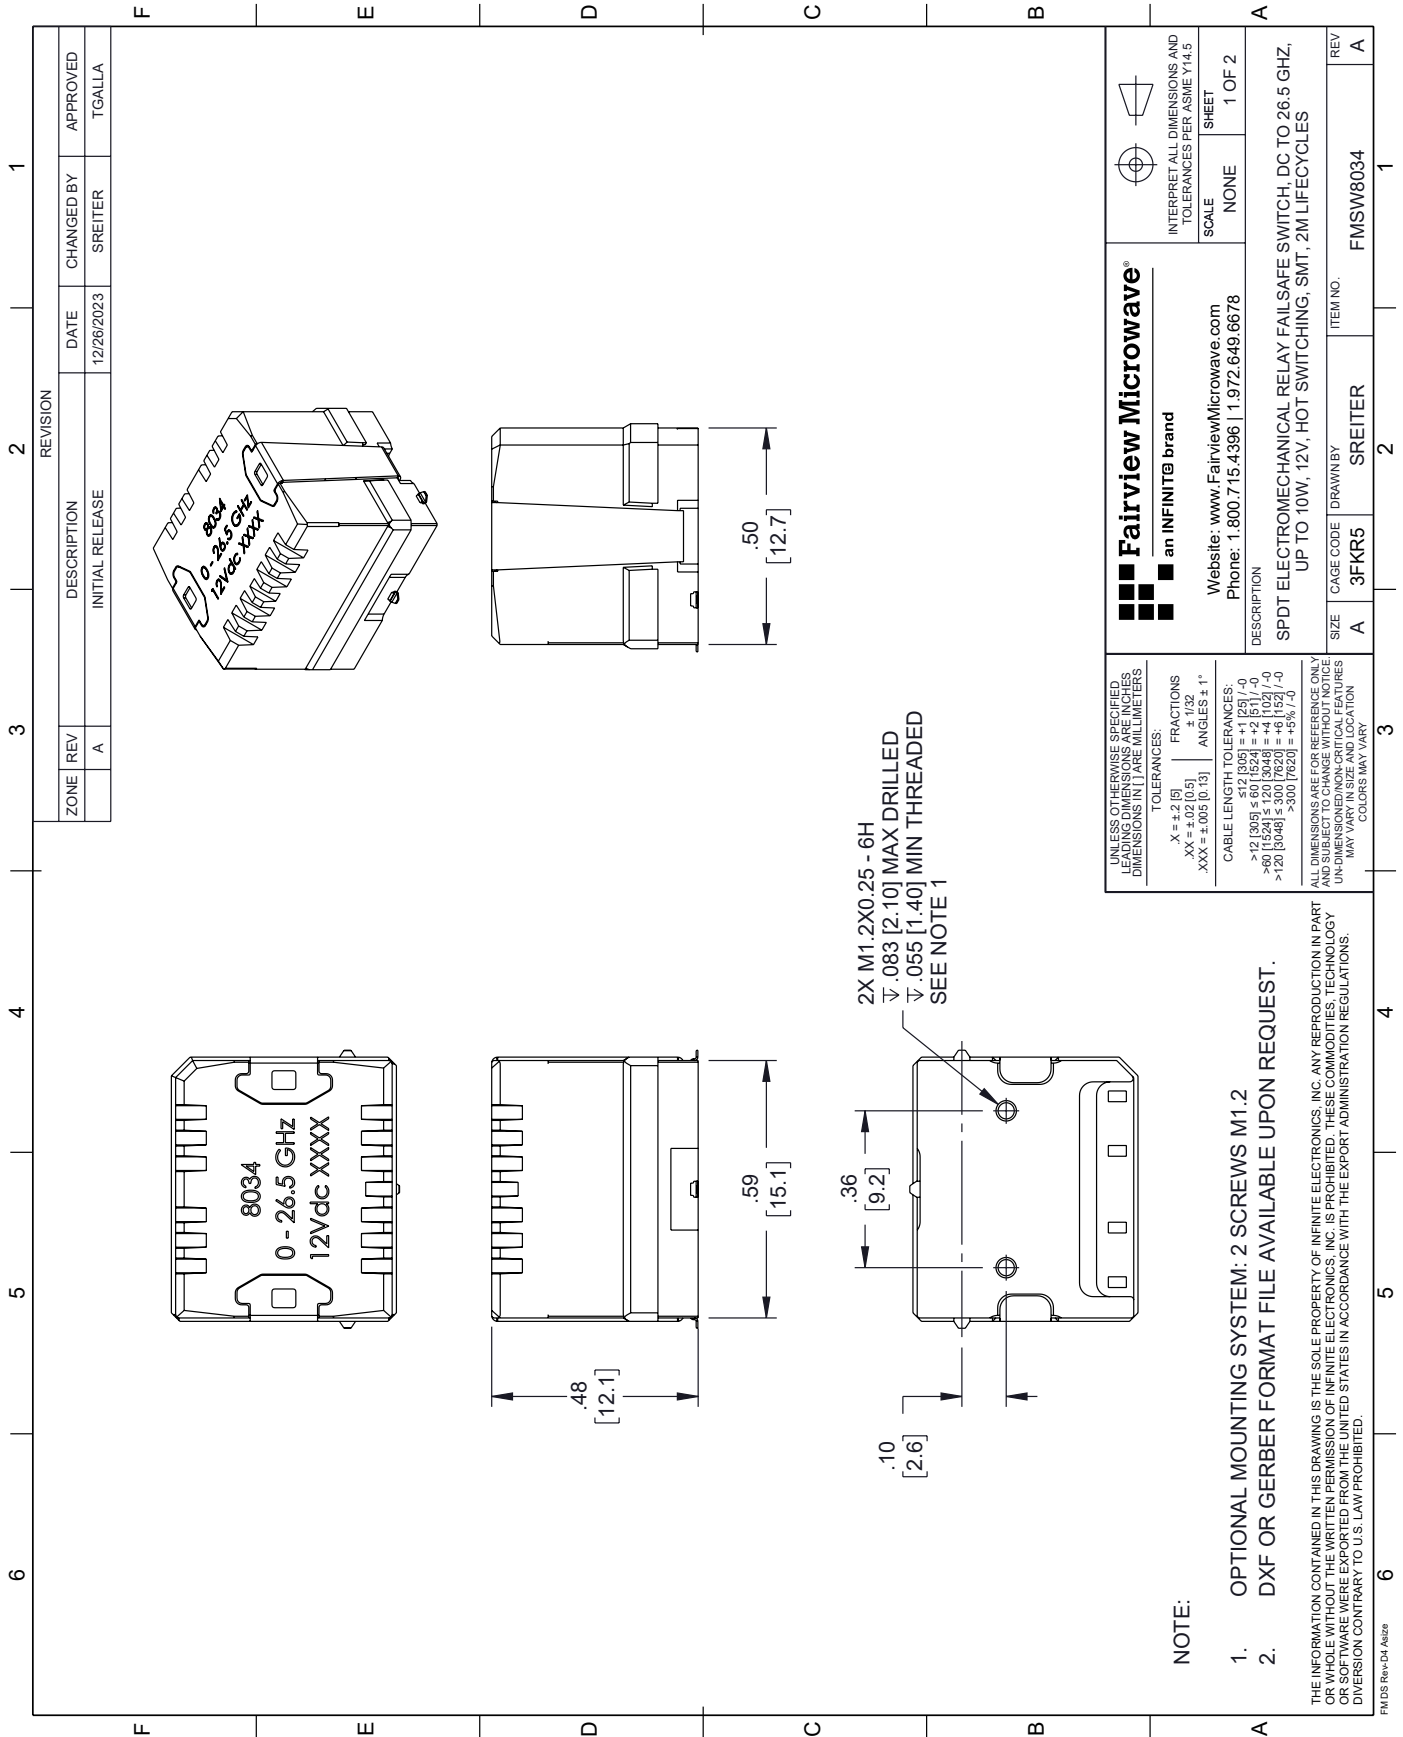

FMSW8034 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	12/26/2023	SREITER	TGALLA

123456

FEDCBA

FAILSAFE MODEL (TYPE 1)

VOLTAGE	RF CONTINUITY
DE-ENERGIZED	C <--> 1(NC)
ENERGIZED	C <--> 2(NO)

PIN IDENTIFICATION (TOP VIEW)

4321

FEDCBA

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE IN MILLIMETERS.

TOLERANCES:

X = ±.2 [.5] FRACTIONS ±.1/32

.XX = ±.02 [.5] ANGLES ± 1°

.XXX = ±.005 [.13] CABLE LENGTH TOLERANCES:

≤ 12 [305] = ±.1 [.25] / -0

> 12 [305] ≤ 60 [1524] = ±.2 [.5] / -0

> 60 [1524] ≤ 120 [3048] = ±.4 [1.02] / -0

> 120 [3048] ≤ 300 [7620] = ±.8 [1.52] / -0

> 300 [7620] = ±.8% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

SCALE: NONE SHEET: 2 OF 2

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

DESCRIPTION: SPDT ELECTROMECHANICAL RELAY FAILSAFE SWITCH, DC TO 26.5 GHZ, UP TO 10W, 12V, HOT SWITCHING, SMT, 2M LIFECYCLES

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	SREITER	FMSW8034	A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE, WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TR-Rev. 02