

**WR-90 to SMA Male Waveguide to Coax Adapter
 UG-135/U Square Cover with 8.2 GHz to 12.4 GHz X
 Band in Aluminum, Paint**

The FMWCA1030 is a waveguide to coaxial adapter operating in the X Band with a 8.2 to 12.4 GHz frequency range. This adapter offers a WR-90 waveguide interface size using a standard UG-135/U Square Cover Flange. The FMWCA1030 is constructed of Aluminum Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a SMA Male Connector.

Configuration

Waveguide Size	WR-90
Flange	UG-135/U Square Cover
RF Connector	SMA Male
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	8.2		12.4	GHz
VSWR		1.25:1		


Mechanical Specifications

RF Connector	
Connector Type	SMA Male
Waveguide Interface	
Waveguide Type	WR-90
Flange Type	Square Cover
Flange Designation	UG-135/U
Body Material and Plating	Aluminum, Paint

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

- Notes:
- Values at +25 °C, sea level unless stated otherwise

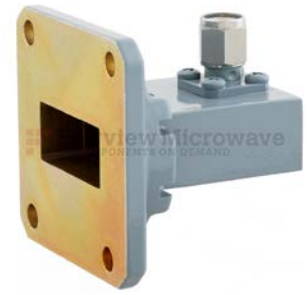

Features:


- X Band
- 8.2 to 12.4 GHz Frequency Range
- WR-90 Waveguide Interface
- UG-135/U Square Cover Flange
- SMA Male RF Interface
- Right Angle

Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

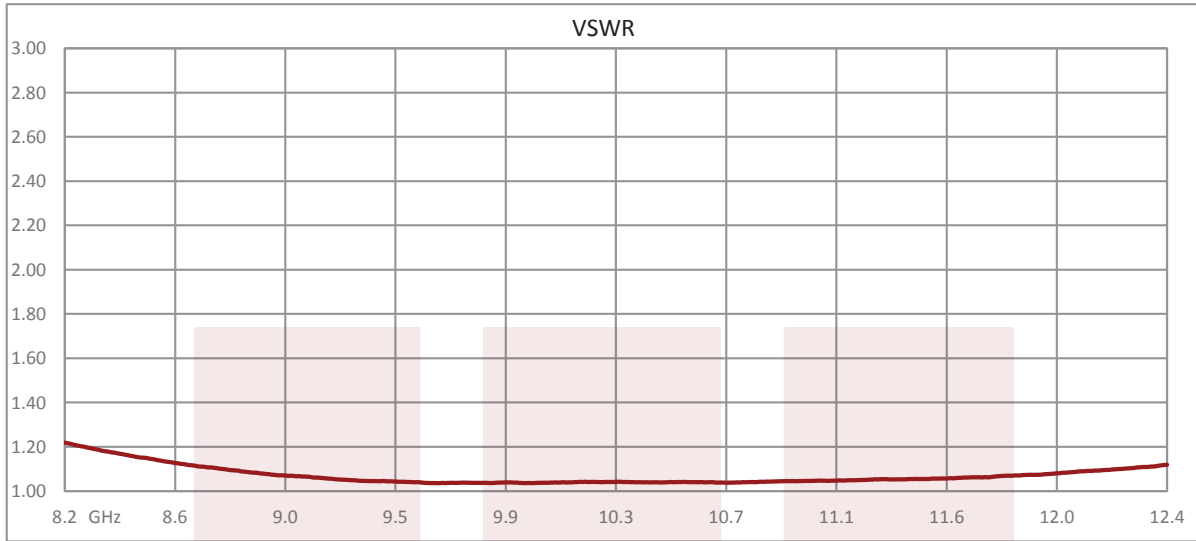


WR-90 to SMA Male Waveguide to Coax Adapter UG-135/U Square Cover with 8.2 GHz to 12.4 GHz X Band in Aluminum, Paint from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-90 to SMA Male Waveguide to Coax Adapter UG-135/U Square Cover with 8.2 GHz to 12.4 GHz X Band in Aluminum, Paint FMWCA1030](https://www.fairviewmicrowave.com/wr90-sma-male-waveguide-coax-adapter-ug135-square-fmwca1030-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr90-sma-male-waveguide-coax-adapter-ug135-square-fmwca1030-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

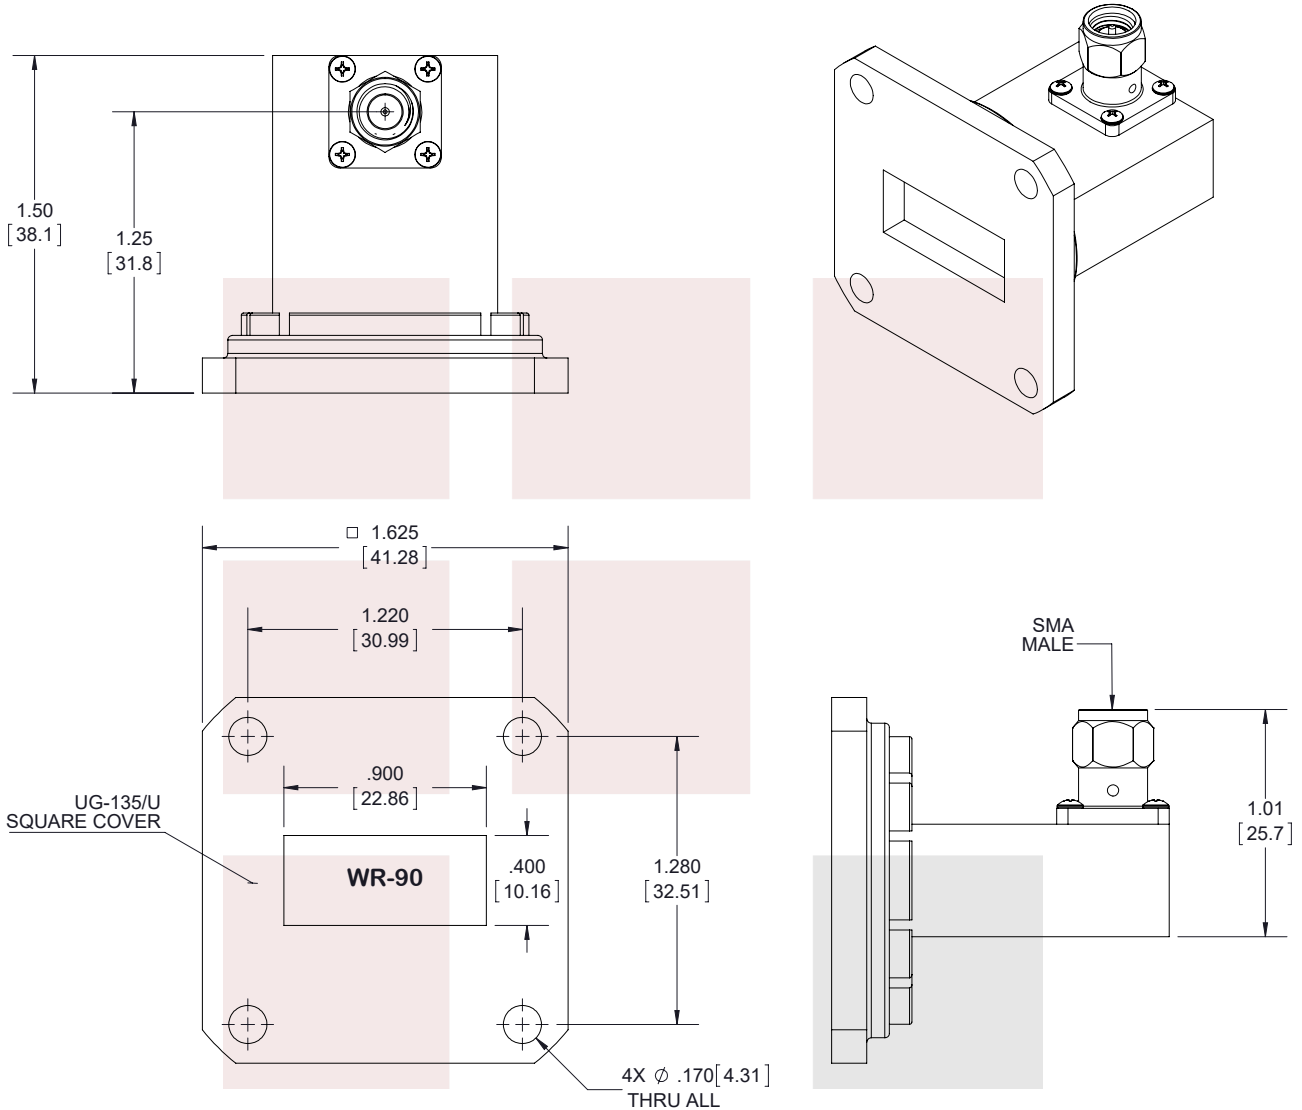

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
TITLE WR-90 to SMA Male Waveguide to Coax Adapter UG-135/U Square Cover with 8.2 GHz to 12.4 GHz X Band in Aluminum, Paint		DWG NO FMWCA1030		CAGE CODE 3FKR5				
CAD FILE	100417	SHEET	1 OF 1	SCALE	N/A	SIZE	A	7361