

## Matching Pad 50 Ohm BNC Male to 75 Ohm BNC Female Operating from DC to 1 GHz

Fairview Microwave's SI1510 is a 50 ohm BNC male to 75 ohm BNC female matching pad that operates from DC to 1,000 MHz. This BNC to BNC impedance matching pad offers a VSWR of 1.35:1 max. SI1510 50 ohm to 75 ohm minimum loss pad has a maximum CW power rating of 1 Watt.

Matching pads are used to match the different impedance between two devices, maximizing power transfer between the two impedances. Fairview Microwave's minimum loss impedance matching pads are available in various connector combinations to fit your needs, all of which ship the same day.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		1,000	MHz
VSWR			1.35:1	
Attenuation		5.7		dB
Input Power, CW			1	Watt

Electrical Specification Notes:  
 Values at +25°C, sea level.

### Mechanical Specifications

#### Size

Length	2.093 in [53.16 mm]
Width	2.2 in [55.88 mm]
Height	0.85 in [21.59 mm]
Weight	0.0614 lbs [27.85 g]
Housing Material and Plating	Brass, Tri-Metal

#### Connector 1

Description	Connector
Type	BNC Male
Impedance	50 Ohms
Inner Conductor Material and Plating	Gold
Dielectric Type	PTFE
Body Material and Plating	Brass, Tri-Metal

#### Connector 2

Description	Connector
Type	BNC Female
Impedance	75 Ohms
Inner Conductor Material and Plating	Gold
Dielectric Type	PTFE
Body Material and Plating	Brass, Tri-Metal



### Configuration:

- Connector 1: 50 Ohms BNC Male
- Connector 2: 75 Ohms BNC Female

### Features:

- DC to 1,000 MHz Frequency Range
- VSWR < 1.35:1
- 1W Max CW Power

### Applications:

- CATV / Cable Networks
- Test and Measurement
- Communication Systems
- Wireless Systems

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

Matching Pad 50 Ohm BNC Male to 75 Ohm BNC Female Operating from DC to 1 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Matching Pad 50 Ohm BNC Male to 75 Ohm BNC Female Operating from DC to 1 GHz SI1510](#)

URL: <https://www.fairviewmicrowave.com/matching-pad-50-ohm-bnc-male-75-ohm-bnc-female-2-ghz-si1510-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

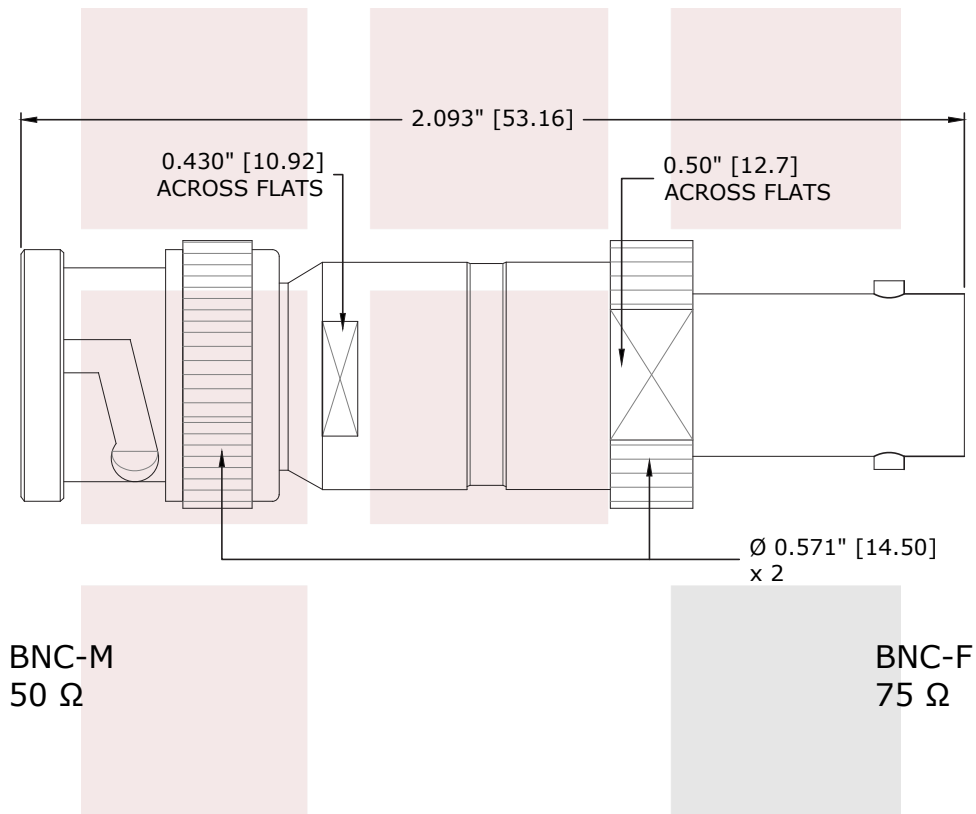

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Matching Pad 50 Ohm BNC Male to 75 Ohm BNC Female Operating from DC to 1 GHz		DWG NO <b>SI1510</b>		CAGE CODE <b>3FKR5</b>	
CAD FILE	101915	SHEET	SCALE	N/A	SIZE A 5568