

2.5 dB NF, 6 GHz to 12 GHz, Low Noise Broadband Amplifier with 30 dB Gain and SMA

The FMAM3293 is a broadband coaxial low noise amplifier, operating in the 6 to 12 GHz frequency range. The amplifier offers +10 dBm of P1dB min and 30 dB small signal gain min, and a Noise Figure of 2.5 dB typ. This low noise amplifier requires only a single positive DC supply, in unconditionally stable, operates over the temperature range of -40°C to 80°C, and is Hermetically sealed.

Electrical Specifications (TA= 25°C)

Description	Min	Typ	Max	Unit
Frequency Range	6		12	GHz
Gain	30			dB
P1dB at	+10			dBm
Noise Figure		2.5		dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Current		200		mA
Quiescent Current	20		40	mA
Operating Temperature Range (OTR)	-40		+80	°C

Mechanical Specifications

Weight	0.08 lbs [36.29 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-40 to +80 deg C
Storage Range	-55 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Features:


- 6 to 12 GHz Frequency Range
- P1dB +10 dBm min
- Small Signal Gain 30 dB min
- Noise Figure 2.5 dB typ
- 50 Ohm Input and Output Matched
- -40°C to +80°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in DC Voltage Regulator


Applications:

- Laboratory Applications
- R&D Labs
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Wireless Communications
- Unmanned Systems
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- RF Front Ends

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

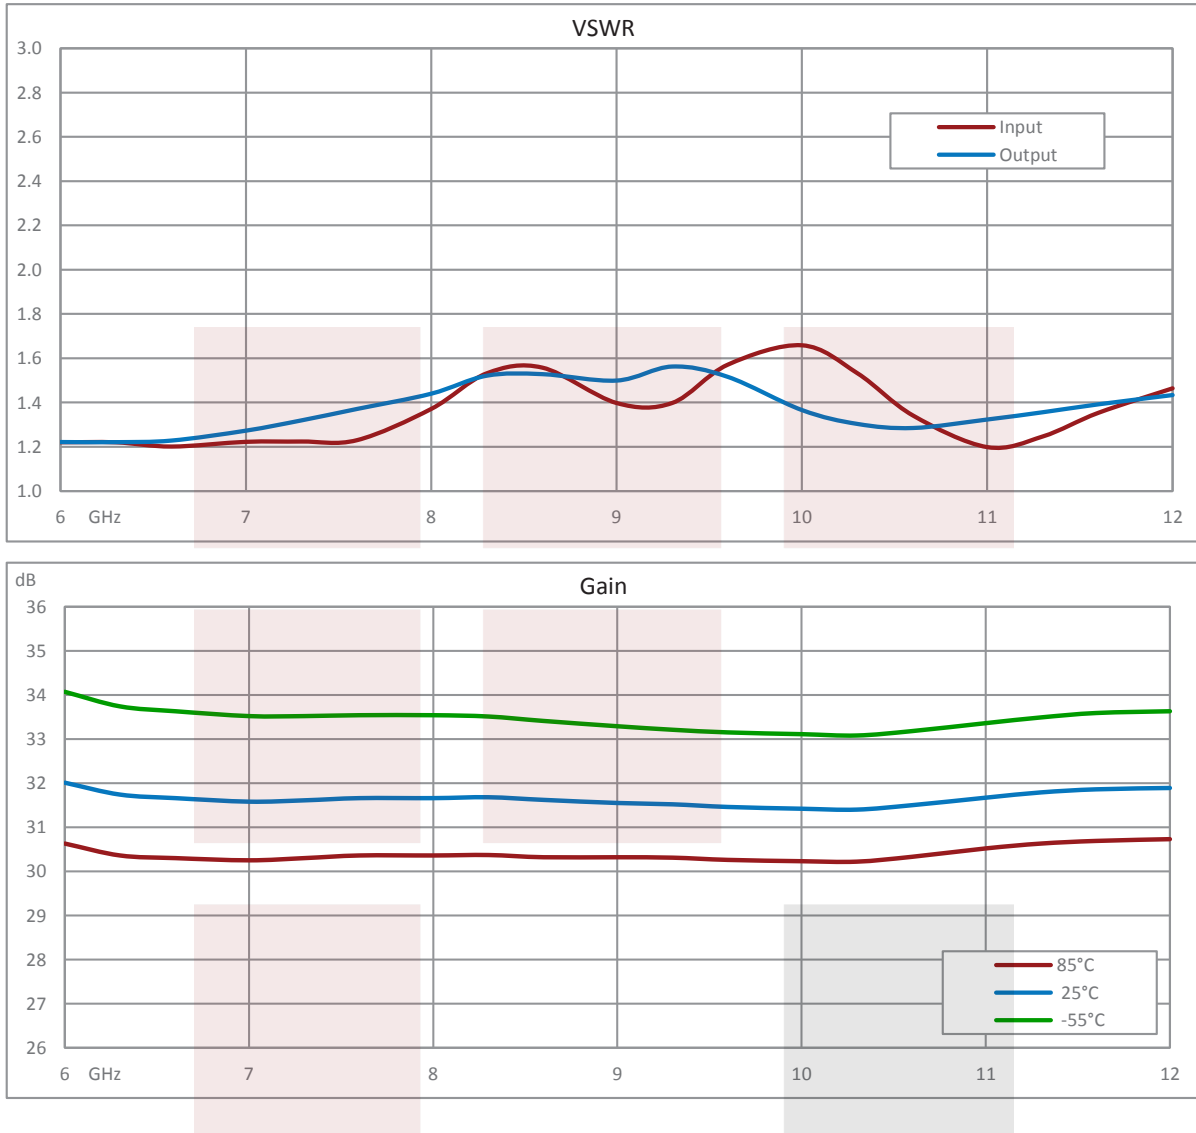

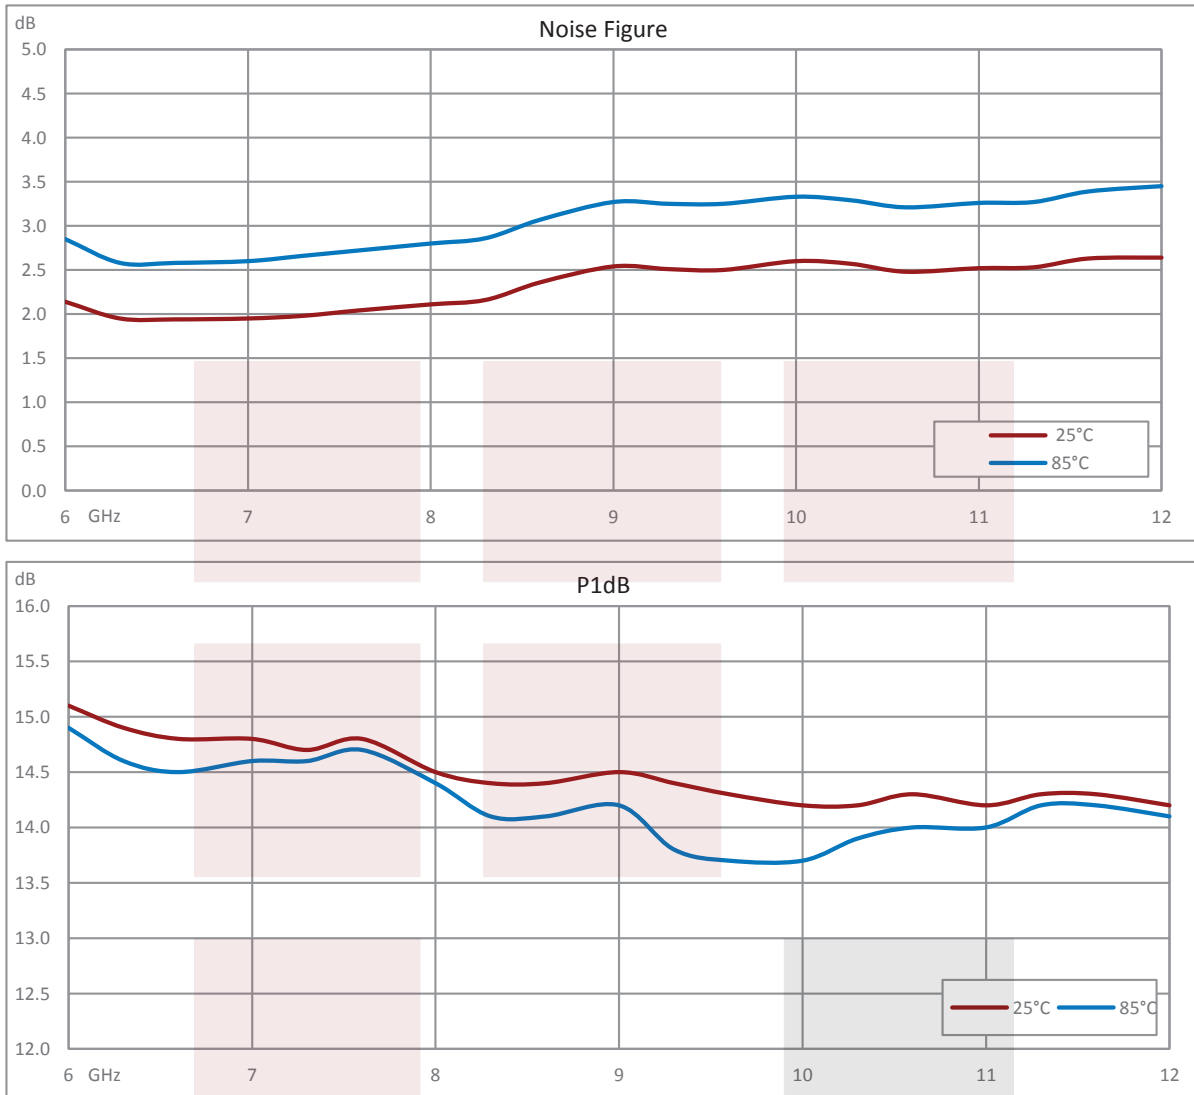


2.5 dB NF, 6 GHz to 12 GHz, Low Noise Broadband Amplifier with 30 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2.5 dB NF, 6 GHz to 12 GHz, Low Noise Broadband Amplifier with 30 dB Gain and SMA FMAM3293](https://www.fairviewmicrowave.com/6-12-ghz-low-noise-broadband-amplifier-fmam3293-p.aspx)

URL: <https://www.fairviewmicrowave.com/6-12-ghz-low-noise-broadband-amplifier-fmam3293-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

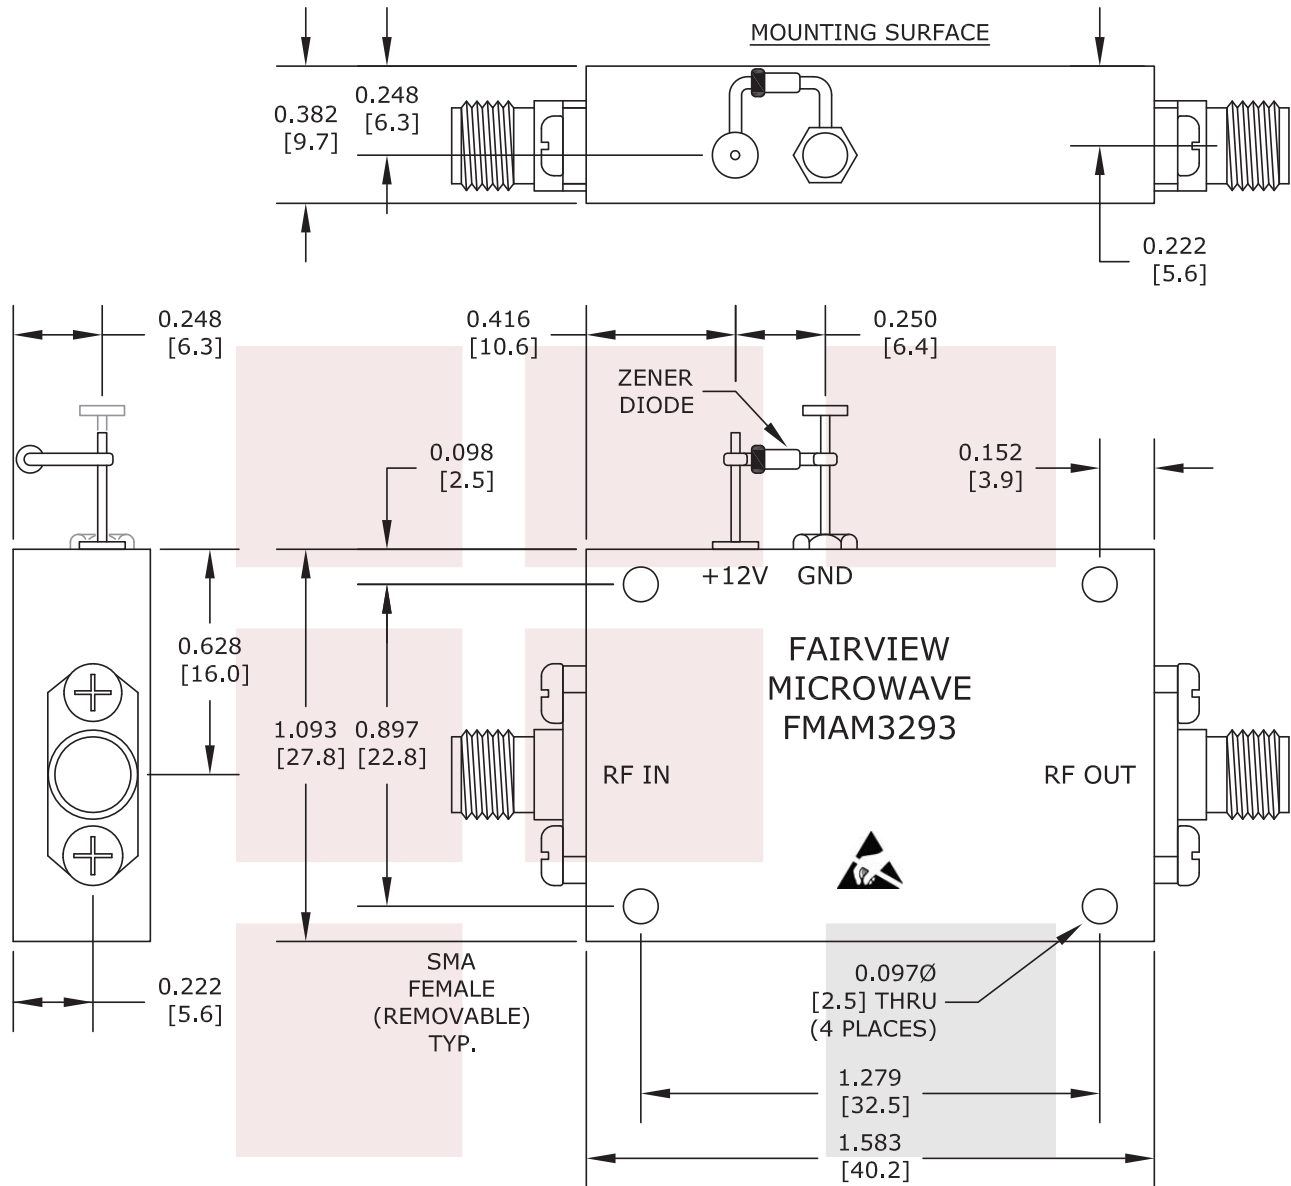

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 2.5 dB NF, 6 GHz to 12 GHz, Low Noise Broadband Amplifier with 30 dB Gain and SMA		DWG NO FMAM3293		CAGE CODE 3FKR5	
CAD FILE	112216	SHEET	SCALE	N/A	SIZE A 2233