

## WR-102 Square Type Flange to N Female Waveguide to Coax Adapter Operating from 7 GHz to 11 GHz

The FMWCA9802 is a waveguide to coaxial adapter with a 7 to 11 GHz frequency range. This adapter offers a WR-102 waveguide interface size coupled with a precision tolerance UG-1493/U square cover flange. The FMWCA9802 is constructed of aluminum to ensure durability and repeatable RF performance.

### Configuration

Waveguide Size	WR-102
Flange	Square Type
RF Connector	N Female
Impedance	50 Ohms
Body Geometry	Right Angle

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	7		11	GHz
VSWR			1.3:1	

### Mechanical Specifications

#### Size

Length	2.28 in [57.91 mm]
Width	1.69 in [42.93 mm]
Height	1.5 in [38.1 mm]
Weight	0.2 lbs [90.72 g]

#### RF Connector

Connector Type	N Female
Body Material and Plating	Passivated Stainless Steel

#### Waveguide Interface

Waveguide Type	WR-102
Flange Type	Square Type
Body Material and Plating	Aluminum

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise



### Features:

- 7 to 11 GHz Frequency Range
- WR-102 Waveguide Interface
- Square Cover Flange
- N Female RF Interface
- Right Angle

### Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems


Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

WR-102 Square Type Flange to N Female Waveguide to Coax Adapter Operating from 7 GHz to 11 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [WR-102 Square Type Flange to N Female Waveguide to Coax Adapter Operating from 7 GHz to 11 GHz FMWCA9802](#)

URL: <https://www.fairviewmicrowave.com/wr102-type-n-female-waveguide-coax-adapter-square-fmwca9802-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

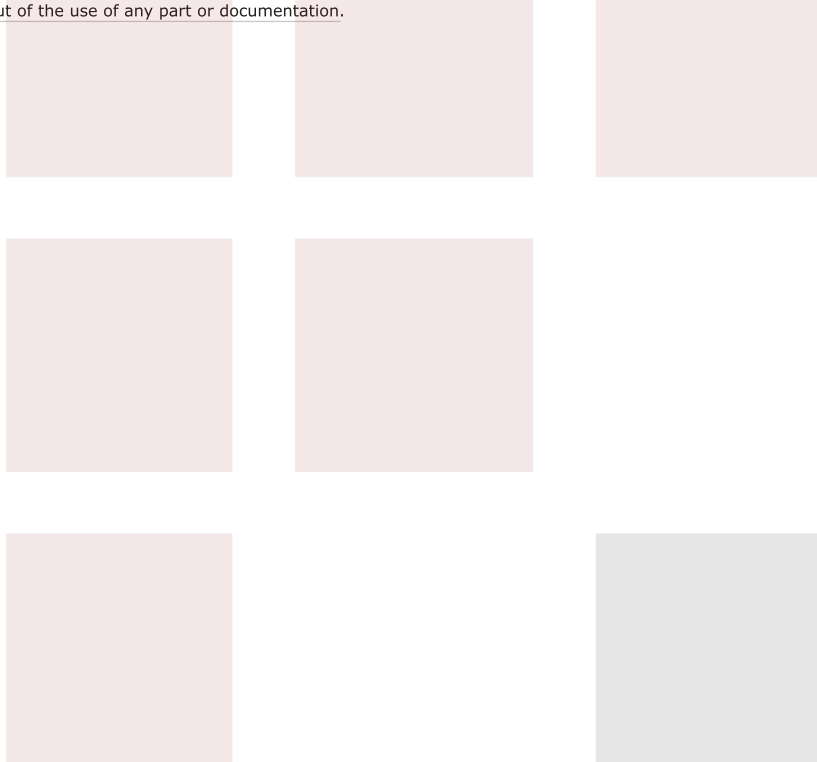

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/14/2022	S. PONG

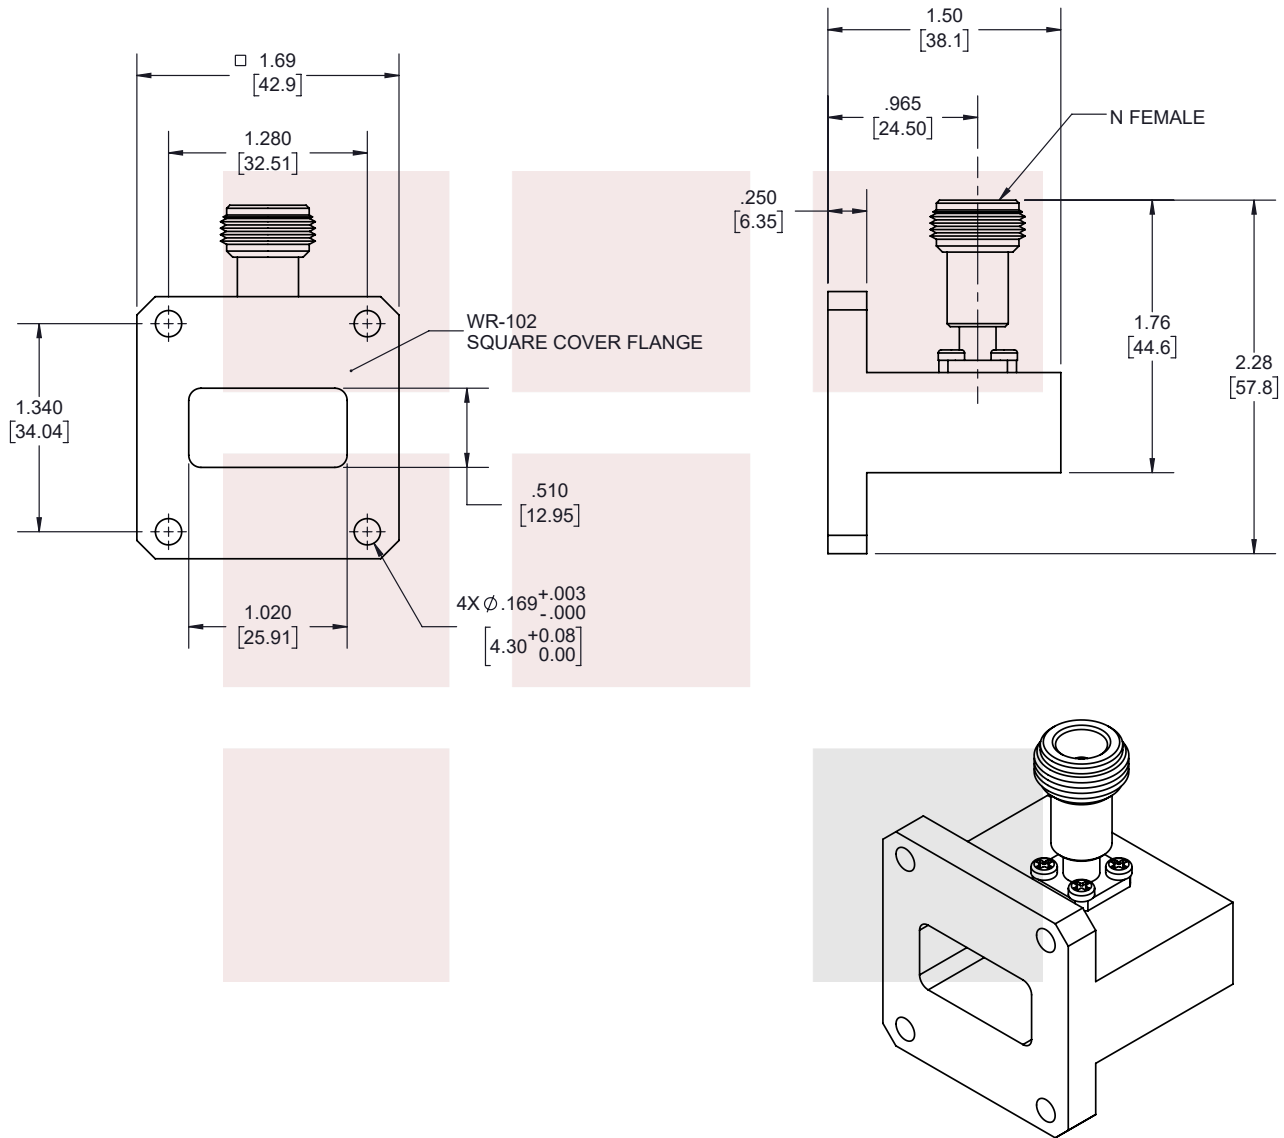

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE  
WR-102 Square Type Flange to N Female Waveguide to Coax Adapter Operating from 7 GHz to 11 GHz

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES: CABLE LENGTH (L) TOLERANCES:

.X = ±.2 [5.08]	FRACTIONS	L ≤ 12 [305] = +1 [25] / -0
.XX = ±.02 [.51]	± 1/32	12 [305] < L ≤ 60 [1524] = +2 [51] / -0
.XXX = ±.005 [.13]	ANGLES ± 1°	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
		120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
		300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SCALE N/A

SIZE A	CAGE CODE 3FKR5	DRAWN BY K.DANG	ITEM NO. FMWCA9802	REV A
-----------	--------------------	--------------------	-----------------------	----------

T-Rev.D