

# FMCA2926 DATA SHEET

# QMA Male to QMA Male Cable Using RG405 Coax

The QMA male to QMA male cable using RG405 type .086 coax, part number FMCA2926, from Fairview Microwave is in-stock and ships same day. This Fairview QMA to QMA cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR086CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

| Description             | Min  | Т      | ур     | Мах | U     | Inits    |
|-------------------------|------|--------|--------|-----|-------|----------|
| Velocity of Propagation |      | 69     | 9.5    |     |       | %        |
| RF Shielding            | -110 |        |        |     |       | dB       |
| Capacitance             |      | 29.4 [ | 96.46] |     | pF/ft | : [pF/m] |

| Mechanical Specifications<br>Cable Assembly   |                                   |  |    |  |  |
|---|-----------------------------------|--|----|--|--|
| Weight  | 0.0                               | 0.039 lbs [17.69 g]  |    |  |  |
| <b>Cable</b><br>Cable Type<br>Impedance<br>Inner Conductor Type<br>Inner Conductor Material and<br>Dielectric Type<br>Number of Shields<br>Outer Conductor Material and | 50<br>So<br>Plating Co<br>PT<br>1 | I-SR086CU-STR<br>Ohms<br>lid<br>pper Clad Steel, Silve<br>FE<br>pper | er |  |  |
| Repeated Minimum Bend Radi  | us 0.0                            | 0.05 in [1.27 mm]  |    |  |  |

# **Configuration:**

- QMA Male
- QMA Male
- FM-SR086CU-STR

# **Features:**

- Shielding Effectivity > -110 dB
- 69.5% Phase Velocity

# **Applications:**

- General Purpose
- Laboratory Use

# Connectors

| Description                     | Connector 1   | Connector 2   |
|---------------------------------|---------------|---------------|
| Туре                            | QMA Male      | QMA Male      |
| Impedance                       | 50 Ohms       | 50 Ohms       |
| Contact Material & Plating      | Gold          | Gold          |
| Dielectric Type                 | PTFE          | PTFE          |
| Body Material & Plating         | Brass, Gold   | Brass, Gold   |
| Coupling Nut Material & Plating | Brass, Nickel | Brass, Nickel |

## Mechanical Specification Notes:

Maximum length using the straight semi rigid coax is 5ft. For lenghts greater than 5ft, please contact us

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **How to Order**

| Part Number Configuration: |  | FMCA2926                               | - xx |  |  |   |
|----------------------------|--|--|------|--|--|---|
|                            |  |  |      |  |  | cm = Centimeters<br><blank> = Inches<br/>Length</blank> |
|                            |  | 12 = 12 inches lon<br>100cm = 100 cm l |      |  |  |   |

QMA Male to QMA Male Cable Using RG405 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: QMA Male to QMA Male Cable Using RG405 Coax FMCA2926


URL: https://www.fairviewmicrowave.com/qma-male-to-qma-male-cable-rg405-type-.086-coax-fmca2926-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

Fairview Microwave





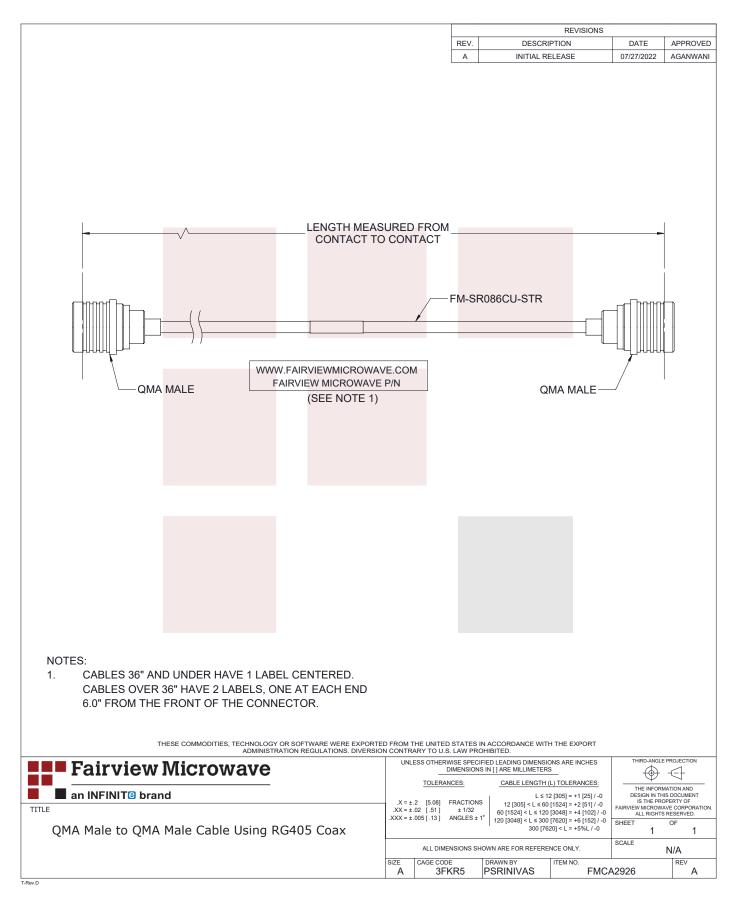

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689