

## SMA Male to SMA Male MIL-DTL-17 Cable M17/113-RG316 Coax in 16 Inch

MIL-DTL-17 SMA (M39012/55-3026) to SMA (M39012/55-3026) cable assemblies with test reports from Fairview Microwave are part of our full line of reliable RF components available with same-day shipping. These COTS (commercial-off-the-shelf) cable assemblies using M17/113-RG316 have traceable processes and materials that are recorded and provided in the included test report. The MIL-DTL-17 coaxial cable and MIL-PRF-39012 connectors are assembled with J-STD-001 soldering processes and meet WHMA-A-620 workmanship criteria. These carefully selected materials, assembly processes and test sequence ensure a dependable cable assembly for high reliability applications where the cost of failure or replacement is high. Each serialized SMA to SMA MIL-DTL-17 cable assembly is traceable to its component lots and test data ship with every cable.

This MIL-C-17 M39012/55-3026 to M39012/55-3026 cable assembly using M17/113-RG316 datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave offers these high reliability RF cable assemblies with test data, and many other RF, microwave and millimeter wave components which allow designers to configure and customize their signal systems however they like. Whether the need is to provide reliable MIL-DTL-17 interconnects or supporting test reports, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom cable assemblies for you and ship same day.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		32 [104.99]		pF/ft [pF/m]
DC Resistance Inner Conductor		0.84 [2.76]		$\Omega/1000ft$ [ $\Omega/Km$ ]
Dielectric Withstanding Voltage (AC)			750	Vrms

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.1	0.4	1	3	GHz
Insertion Loss (Max.)	0.13	0.19	0.36	0.63	0.99	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.06 * \text{SQRT}(\text{GHz})$  dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 16 in [406.4 mm]

#### Cable

Cable Type M17/113-RG316  
 Impedance 50 Ohms



### Configuration:

- SMA Male
- SMA Male
- M17/113-RG316

### Features:

- Max Frequency 3 GHz
- 69.5% Phase Velocity
- FEP Jacket
- J-STD-Soldering
- Lot Traceability Data
- Qualified cable and connectors (QPL)
- Acceptance Test Report
- RF Test Data
- In stock and ready to ship

### Applications:

- Hi-Reliability
- Unmanned Systems
- Drones
- MIL-DTL-17 Requirements
- Military Electronics

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Clad Copper
Outer Conductor Diameter	0.081 in [2.06 mm]
Jacket Material	FEP
Jacket Diameter	0.098 in [2.49 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Specification	MIL-PRF-39012	MIL-PRF-39012
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Brass, Gold	Brass, Gold
Contact Plating Spec.	ASTM B488	ASTM B488
Dielectric Type	Teflon	Teflon
Body Material & Plating	Steel, Passivated	Steel, Passivated
Body Plating Spec.	QQ-P-35	QQ-P-35
Coupling Nut Material & Plating	Steel, Passivated	Steel, Passivated
Coupling Nut Plating Spec.	QQ-P-35	QQ-P-35
Seal Gasket Material	Silicone Rubber	Silicone Rubber

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Environmental Specifications**
**Temperature**

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)


**Plotted and Other Data**
**Notes:**

- Values at 25°C, sea level.

**How to Order**

Part Number Configuration:

**FMHR0090 - xx uu**

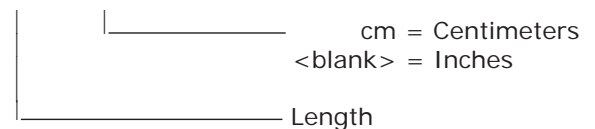

Example: FMHR0090-12 = 12 inches long cable  
 FMHR0090-100cm = 100 cm long cable


SMA Male to SMA Male MIL-DTL-17 Cable M17/113-RG316 Coax in 16 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [SMA Male to SMA Male MIL-DTL-17 Cable M17/113-RG316 Coax in 16 Inch FMHR0090-16](#)

URL: <https://www.fairviewmicrowave.com/sma-male-sma-male-cable-m17-113-rg316-coax-fmhr0090-16-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



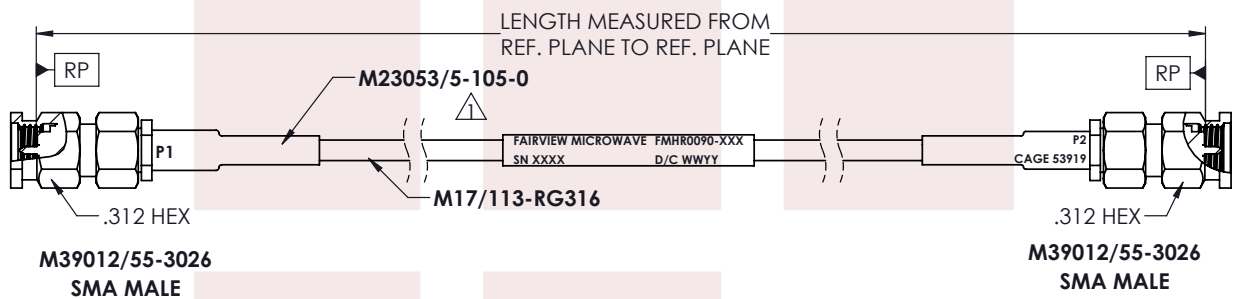

**STANDARD TOLERANCES**

.X ±0.2  
.XX ±0.01  
.XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

**NOTES:**

1. BLACK HEAT SHRINK WITH WHITE MARKINGS 3 PLACES.

<p><b>Fairview Microwave</b> RF COMPONENTS ON DEMAND. <i>Done!</i></p>		<p>NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].</p>	
<p>TITLE SMA Male to SMA Male MIL-DTL-17 Cable M17/113-RG316 Coax in 16 Inch</p>		<p>DWG NO <b>FMHR0090</b></p>	<p>CAGE CODE <b>3FKR5</b></p>
<p>CAD FILE 11/16/18</p>	<p>SHEET 1 OF 1</p>	<p>SCALE N/A</p>	<p>SIZE A CN2379</p>