


Calibrated Noise Source Module With a Noise Output ENR of 15 dB, and a Voltage of +28 VDC, Operating From 1 GHz to 18 GHz With SMA

FMNG1004 is a coaxial packaged Noise Source module which operates over a wide frequency range from 1 GHz to 18 GHz. The design is calibrated in 1 GHz steps and is ideal for Noise Figure measurements and a variety of built-in test applications. This model operates at +28 Vdc and features an output ENR level of 15 dB min, typical flatness across the entire frequency band is +/- 2.0 dB, and excellent stability. Performance is specified over -55°C to +85°C with Noise Output Temperature Variation <0.01 dB/°C, Noise Output Variation <0.1 dB/%V. The rugged package design supports an output Female SMA connector with an EMI/RFI filter voltage pin and ground tab. Additionally, the model is designed to meet a variety of demanding MIL-STD-202F environmental test conditions including Humidity, Thermal Shock, and Vibration for added confidence for highly reliable operation.

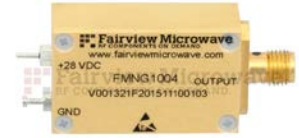

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	1		18	GHz
Impedance		50		Ohms
Output ENR	15			dB
Flatness		±2		dB
VSWR		1.5:1		
Output Variation vs Input Voltage			0.1	dB/%V
Output Variation vs Temperature			0.01	dB/deg C
Bias Voltage 1	22	28	30	Volts
Input Current 1			25	mA
Calibration Points	1 GHz Steps			

Mechanical Specifications

Size	
Length	1.25 in [31.75 mm]
Width/Dia.	0.75 in [19.05 mm]
Height	0.5 in [12.7 mm]
Weight	0.063 lbs [28.58 g]
Package Type	Connectorized Module
Connectors	
DC Connector	Pin
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-55 to +85 deg C
Storage Range	-65 to +125 deg C
Environment	
Humidity	MIL-STD-202F, Method 103, Cond B (96 hrs@95% R.H.)
Shock	MIL-STD-202F, Method 213, Cond B (100g, 6 msec)

Features:

- 1 GHz to 18 GHz Bandwidth
- Calibrated Frequencies: 1 GHz steps
- High ENR output: 15 dB min
- Typical Flatness +/- 2.0 dB
- Excellent Stability
- Noise Output Temperature Variation: <0.01 dB/°C
- Noise Output Variation <0.1 dB/%V
- Rugged Package Design supports output Female SMA connector
- Designed to meet MIL-STD-202F environmental test conditions
- Internal Voltage Regulation

Applications:

- Noise Figure Measurements
- Built-In Test equipment for signal strength calibrators and radar applications
- Automatic Test Equipment (ATE)
- Jamming
- Baseband Signal Simulation
- Additive White Gaussian Noise (AWGN) source for Error Rate Measurements
- Increase dynamic range of A/D Converters
- SATCOM for bit error rate (BER) and noise figure
- Can be used as a Jitter source.

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Vibration
 Altitude
 Temperature Cycle
 Thermal Shock
 ESD Sensitivity

MIL-STD-202F, Method 204, Cond B (0.6" 2x ampl or 15g)
 MIL-STD-202F, Method 105, Condition B (50,000 ft)
 MIL-STD-202F, Method 105C, Condition D (5 cycles)
 MIL-STD-202F, Method 107, Condition A (5 cycles)
 ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.





Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

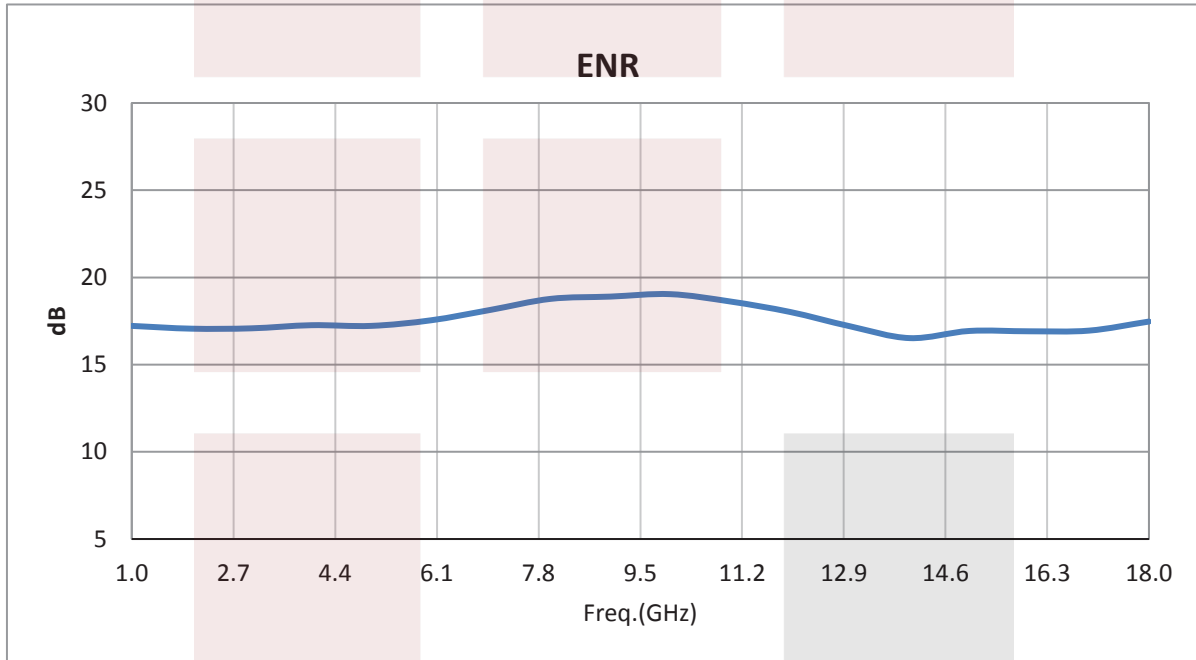

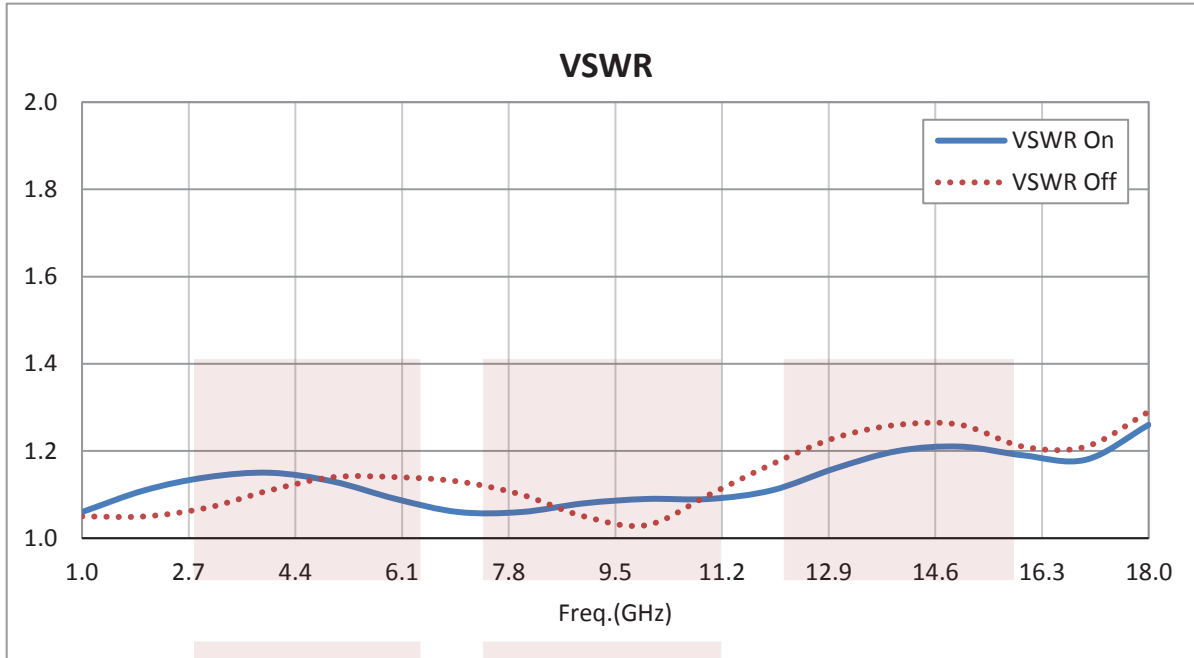


Calibrated Noise Source Module With a Noise Output ENR of 15 dB, and a Voltage of +28 VDC, Operating From 1 GHz to 18 GHz With SMA from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Calibrated Noise Source Module With a Noise Output ENR of 15 dB, and a Voltage of +28 VDC, Operating From 1 GHz to 18 GHz With SMA FMNG1004](https://www.fairviewmicrowave.com/calibrated-noise-source-enr-15-db-18-ghz-sma-fmng1004-p.aspx)

URL: <https://www.fairviewmicrowave.com/calibrated-noise-source-enr-15-db-18-ghz-sma-fmng1004-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

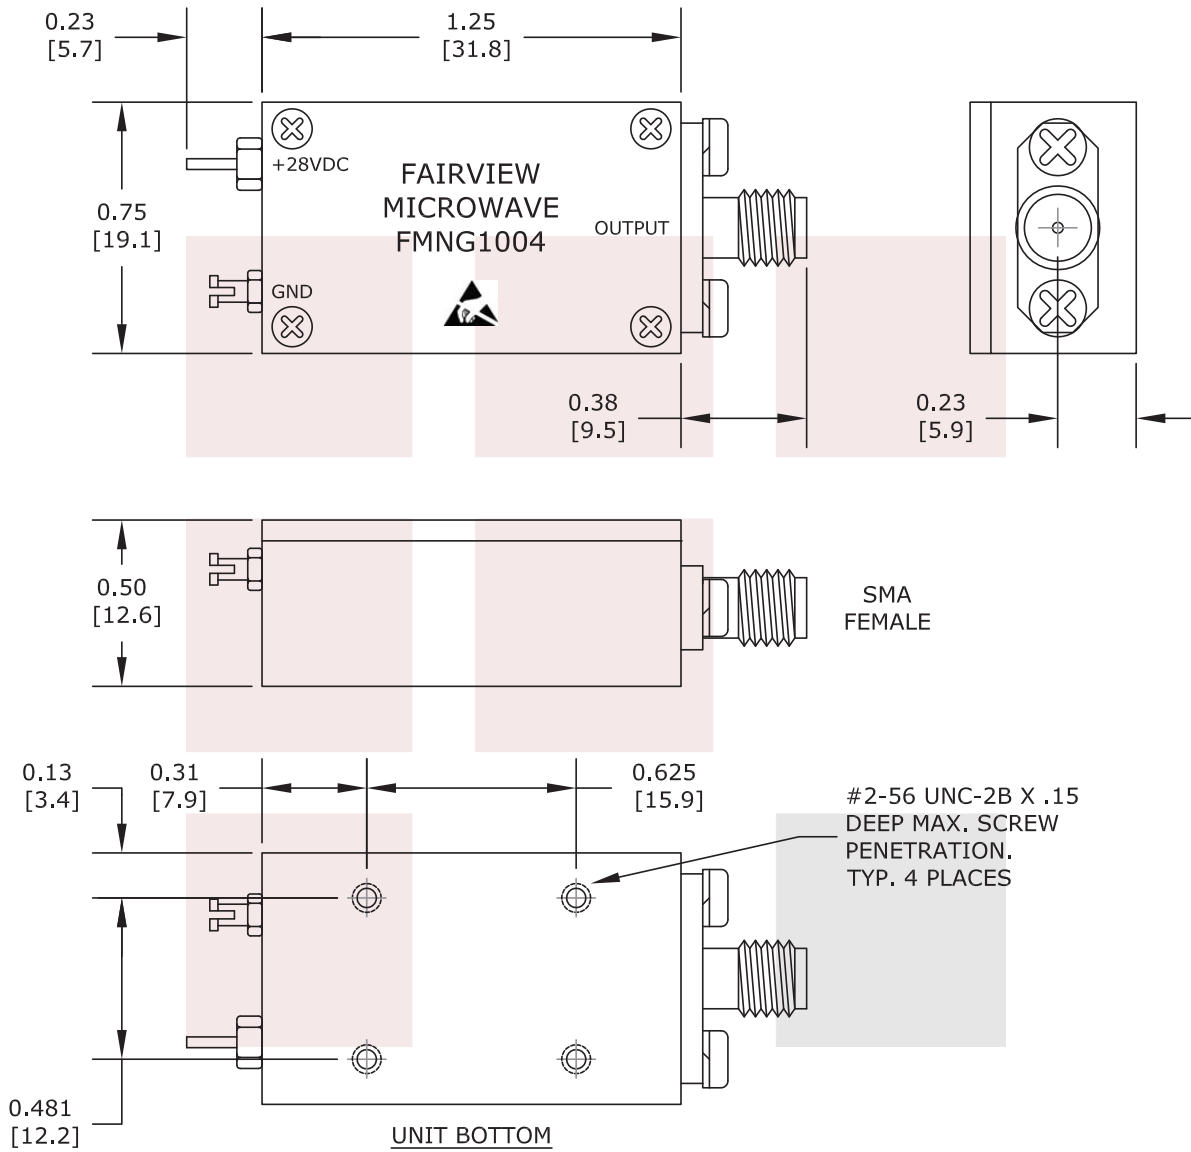

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Calibrated Noise Source Module With a Noise Output ENR of 15 dB, and a Voltage of +28 VDC, Operating From 1 GHz to 18 GHz With SMA		DWG NO FMNG1004		CAGE CODE 3FKR5	
CAD FILE	110915	SHEET	SCALE	N/A	SIZE A 2233