



7/16 DIN Male Open Calibration Kit Component for Precision Up to 7.5 GHz

7/16 DIN male open calibration kit component, part number FMSC3032, from Fairview Microwave is in-stock and ships same day. This 7/16 DIN precision open circuit can be used for calibration of most vector network analyzers (VNA), cable analyzers or site analyzers. Coefficients for this 7/16 DIN open calibrating component are provided in the datasheet. These can be entered into most VNAs to provide the necessary corrections, thereby allowing replacement of misplaced or damaged calibration components. Precision control of the impedance and electrical length allow for OSLT analyzer calibrations over the complete frequency range of the connector interface provided.

Fairview's 7/16 DIN open circuit calibration component FMSC3032 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering for RF, microwave and millimeter wave components allows designers to configure and customize their test solutions however they like. From calibration kit replacement to SOLT / OSLT VNA calibration, Fairview Microwave has the right calibration kit components to meet your needs and ship them same-day.



Features:

- Controlled Impedance
- Published Calibration Coefficients
- Replaces Damaged Calibrating Kit Components
- · Controlled Electrical Length
- Precision Interfaces
- In Stock and Ready to Ship

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		7.5	GHz
Impedance		50		Ohms
Phase Accuracy			±1.25	deg
Offset Loss		0.63		GOhm/s
Electrical Delay		66.734		ps
Capacitance				
CO		32		10 ⁻¹⁵ F
C1		0		10 ⁻²⁷ F/Hz
C2		-50		10 ⁻³⁶ F/Hz ²
C3		100		10 ⁻⁴⁵ F/Hz ³

Applications:

- SOLT or OSLT Calibration
- VNA Calibration
- · Device Characterization
- De-embedding
- Replacement Calibration Kits

Mechanical Specifications

Size

 Length
 2.31 in [58.67 mm]

 Width/Diameter
 1.311 in [33.3 mm]

 Pin Depth
 0.0682 to 0.0697 in

Connector 1

Connector Type 7/16 DIN Male Body Material and Plating Stainless Steel

Connector 2

Environmental Specifications

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at +25 °C, sea level

7/16 DIN Male Open Calibration Kit Component for Precision Up to 7.5 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 7/16 DIN Male Open Calibration Kit Component for Precision Up to 7.5 GHz FMSC3032

URL: https://www.fairviewmicrowave.com/7-16-din-male-calibration-kit-component-open-7.5-ghz-fmsc3032-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





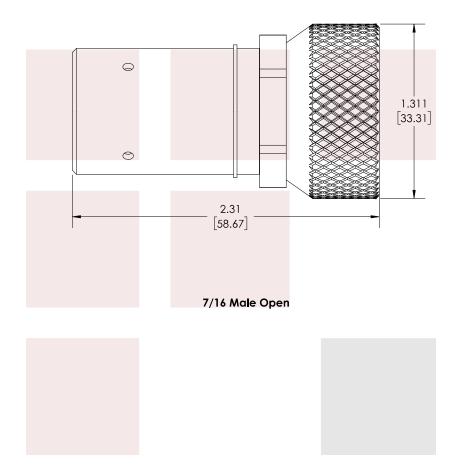

STANDARD TOLERANCES

X ±0.2 XX ±0.01 XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
7/16 DIN Male Open Calibration Kit Component for Precision Up to 7.5 GHz	DWG NO FMSC3032			CAGE CODE 3FKR5		
Trodision op to 7.0 onz	CAD FILE 01/24/2018	SHEET	SCAI	LE N/A SIZE A	CN2245	