

Waveguide Transition With WR-112 CPR-112G Grooved Flange to WR-90 CPR-90G Grooved Flange in 3 Inch Length

The FMWTS1003 is part of Fairview Microwave's family of Waveguide Transitions (also sometimes called waveguide adapters) used as a means of propagating RF/Microwave energy from one waveguide size to another. The FMWTS1003 allows the waveguide to change from a WR-112 waveguide (using a CPR-112G flange) to a WR-90 waveguide (using a CPR-90G flange).



Electrical Specifications

Description	Min	Typ	Max	Units
VSWR		1.08:1		

Mechanical Specifications

Size	Min	Typ	Max	Units
Length		3 in [76.2 mm]		

Description	Flange 1	Waveguide	Flange 2
Designation	None	WR-112 to WR-90	None
Flange Type	CPR-112G		CPR-90G

Compliance Certifications (visit www.FairviewMicrowave.com for current document)


RoHS Compliant	Yes
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

- Typical VSWR data taken with load

Typical Performance Data

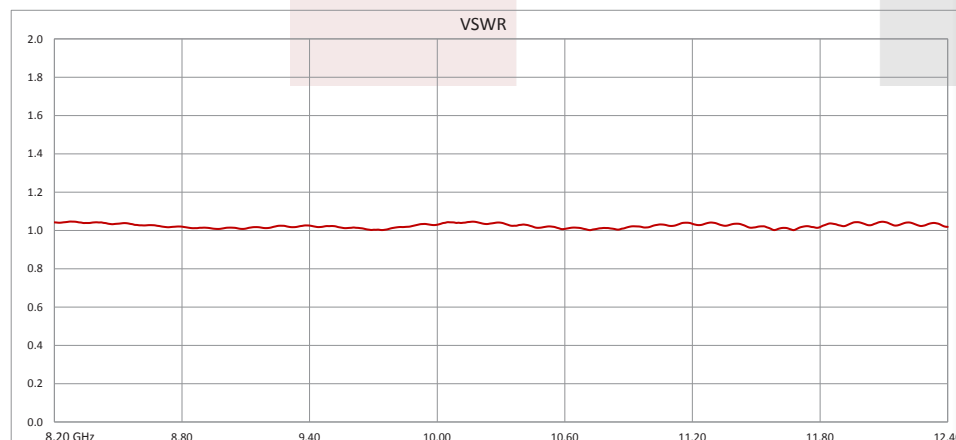

Features:

- Transitions from WR-112 to WR-90 waveguide
- WR-112 waveguide CPR-112G flange
- WR-90 waveguide CPR-90G flange
- Painted finish

Applications:

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


Waveguide Transition With WR-112 CPR-112G Grooved Flange to WR-90 CPR-90G Grooved Flange in 3 Inch Length from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Waveguide Transition With WR-112 CPR-112G Grooved Flange to WR-90 CPR-90G Grooved Flange in 3 Inch Length FMWTS1003](#)

URL: <http://www.fairviewmicrowave.com/waveguide-transition-wr112-cpr-112g-grooved-wr90-cpr-90g-grooved-fmwts1003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



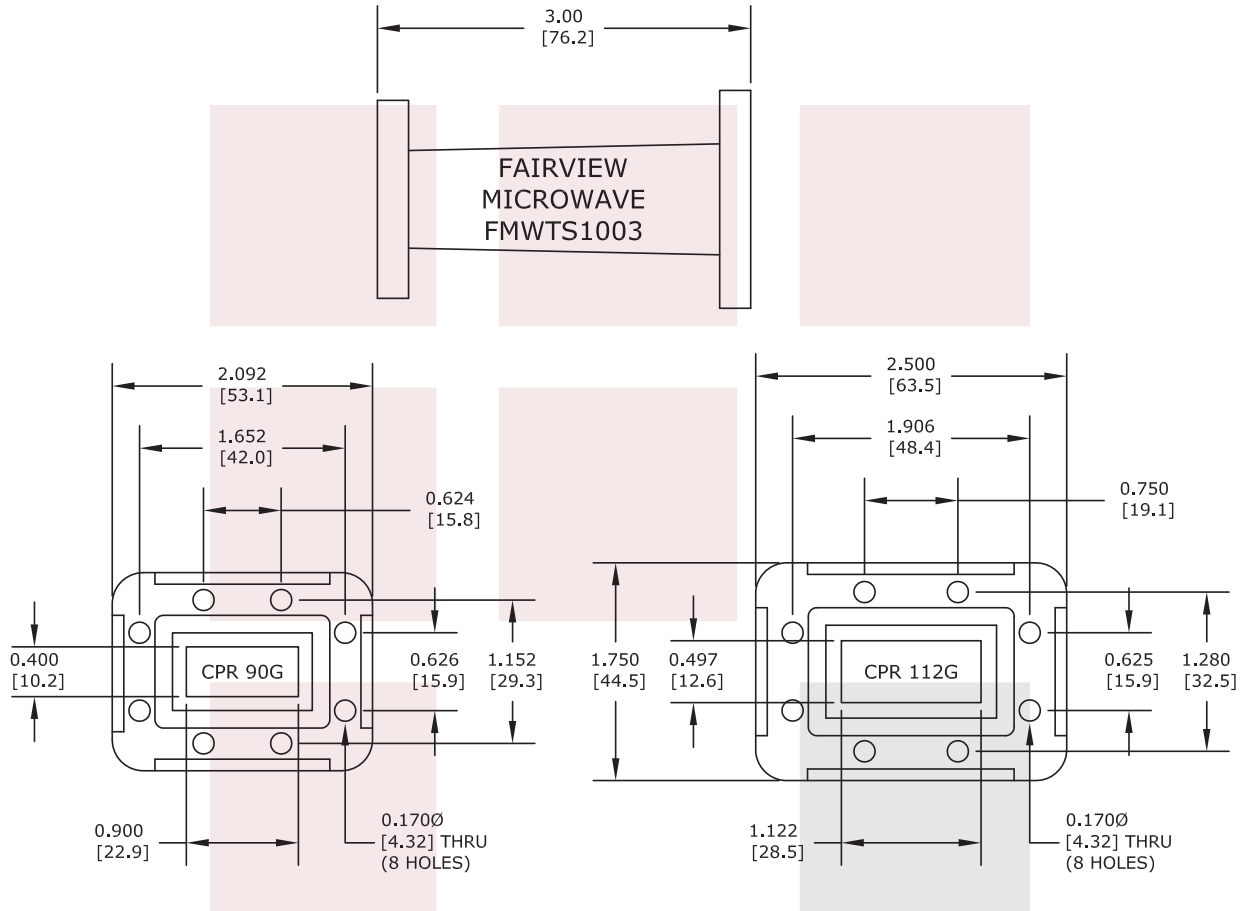

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Waveguide Transition With WR-112 CPR-112G Grooved Flange to WR-90 CPR-90G Grooved Flange in 3 Inch Length		DWG NO FMWTS1003		CAGE CODE 3FKR5	
CAD FILE	010816	SHEET	SCALE	N/A	SIZE A 2233