

MP0208-8 DATA SHEET

8 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts

Fairview Microwave carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Fairview Microwave's resistive and reactive power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types.

The MP0208-8 is an 8 way reactive power divider that operates from 2 to 8 GHz and can handle up to 30 Watts (CW). This SMA power divider offers 17 dB min isolation and 1.65:1 max VSWR. The package interface uses SMA inputs on all of the ports.

Electrical Specifications

Design Reactive Number of Output Ports 8

Description	Min	Тур	Max	Units
Frequency Range	2		8	GHz
Impedance		50		Ohms
Input VSWR			1.65:1	
Output VSWR			1.35:1	
Insertion Loss			11	dB
Isolation	17			dB
Amplitude Balance			±0.7	dB
Phase Balance			±7	Degrees
Input Power (CW)			30	Watts

Electrical Specification Notes: Values at +25°C, sea level. Insertion loss includes 9dB theoretical loss.

Mechanical Specifications

Size Lenath Width Height

4.26 in [108.2 mm] 2.49 in [63.25 mm] 0.4 in [10.16 mm] 0.3674 lbs [166.65 Weight q1

Housing Material and Plating Aluminum, Gray

Configuration

Input Connector SMA Female **Output Connectors** SMA Female

Environmental Specifications Temperature

> Operating Range -55 to +85 deg C Storage Range -55 to +100 deg C



Features:

- 8-Way Power Divider
- Reactive Design
- 2 GHz to 8 GHz Frequency Range
- Max Power 30W (CW)
- Isolation > 17 dB

Applications:

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

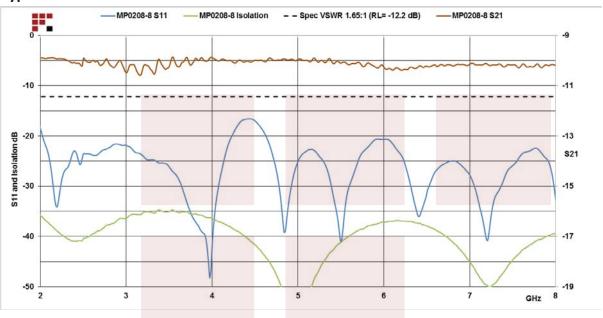

8 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 8 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts MP0208-8


URL: https://www.fairviewmicrowave.com/8-way-power-divider-sma-8-ghz-30-watts-mp0208-8-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.







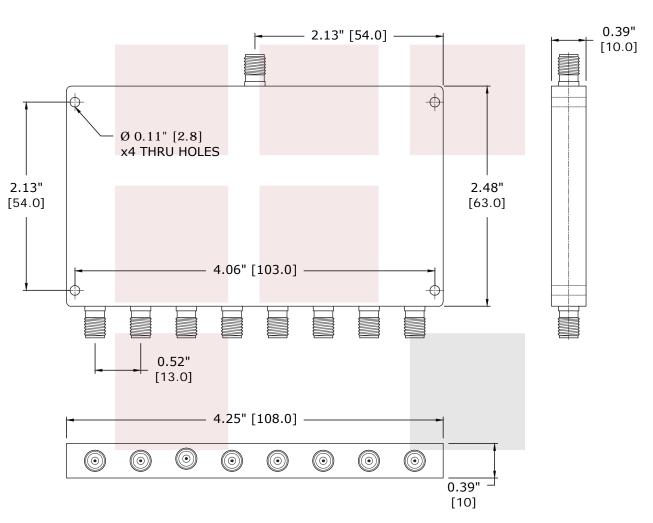

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
8 Way Power Divider SMA Connectors From 2 GHz to 8 GHz Rated at 30 Watts	DWG NO MP0208-8			CAGE CODE 3FKR5		
	CAD FILE 011415	SHEET	SCALI	E N/A	SIZE A	5568