

SMA BIAS T 30 KHZ- 40 GHZ 500 MA PIN

SB4000

SPECIFICATIONS

ELECTRICAL



FREQUENCY: 30 KHZ - 40 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.80:1 MAX
 INSERTION LOSS: 3.0 DB MAX
 ISOLATION: 40 DB MIN
 VOLTAGE: 25 VDC MAX
 CURRENT: 500 MA MAX

MECHANICAL

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL CONTACTS: Au PLATED BeCu

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

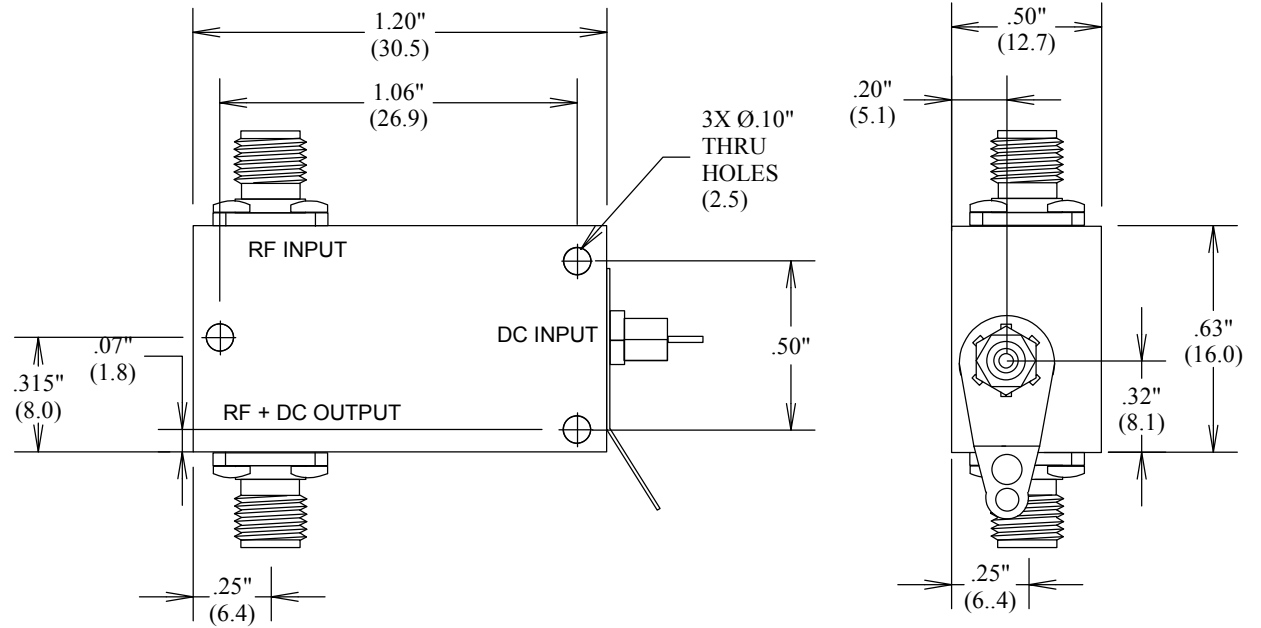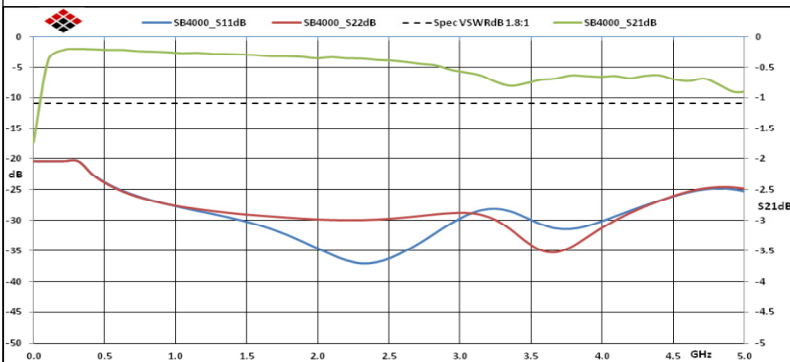

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA BIAS T 30 KHZ - 40 GHZ 500 MA PIN

| | | | | |
|------------------|---------------------------|--------|---------------|-----------------|
| SIZE A | CAGE CODE 3FKR5 | DWG NO | SB4000 | REV A |
| SCALE | SHEET | | | |