

1.85 BIAS T 30 KHZ- 65 GHZ 500 MA PIN

SB65000

SPECIFICATIONS

ELECTRICAL



FREQUENCY: 30 KHZ - 65 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 2.00:1 MAX
 INSERTION LOSS: 3.0 DB MAX
 ISOLATION: 30 DB MIN
 VOLTAGE: 25 VDC MAX
 CURRENT: 500 MA MAX

MECHANICAL

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL CONTACTS: Au PLATED BeCu

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

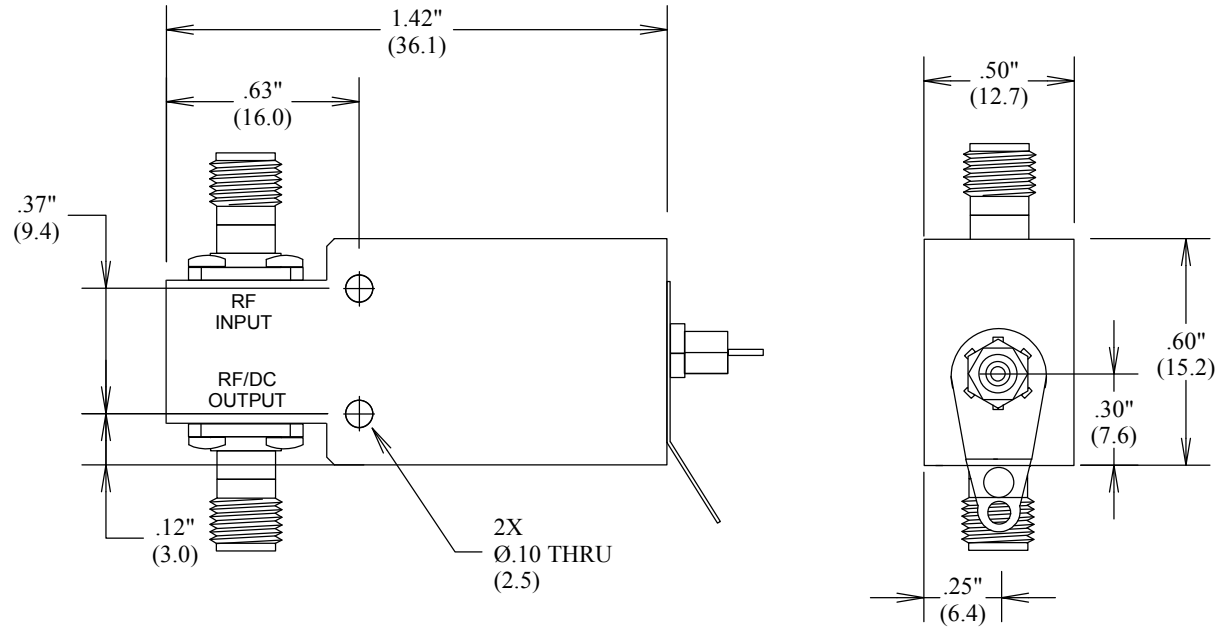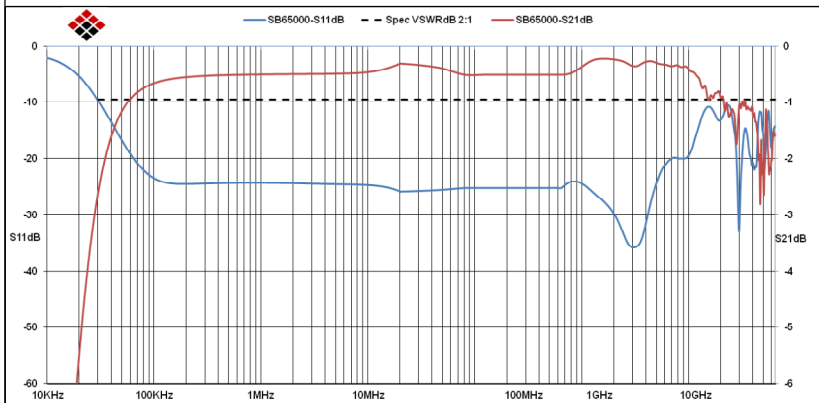

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

1.85 BIAS T 30 KHZ- 65 GHZ 500 MA PIN

SIZE A	CAGE CODE 3FKR5	DWG NO	SB65000	REV A
SCALE			SHEET	

ALL DIMENSIONS IN inches(mm) Typical