

# SMA-F PANEL POST CONTACT 27 GHZ

SC3028

## SPECIFICATIONS


### ELECTRICAL:

FREQUENCY: 0-26.5 GHZ  
 IMPEDANCE: 50 OHMS  
 OP. TEMP RANGE: -65°C to +155°C

### MECHANICAL:

MATERIAL BODY: PASSIVATED STAINLESS STEEL  
 CENTER CONTACT: BeCu Au PLATED PER MIL-G-45204  
 INSULATOR: TEFLON  
 INTERFACE: MIL-STD-348

ROHS COMPLIANT

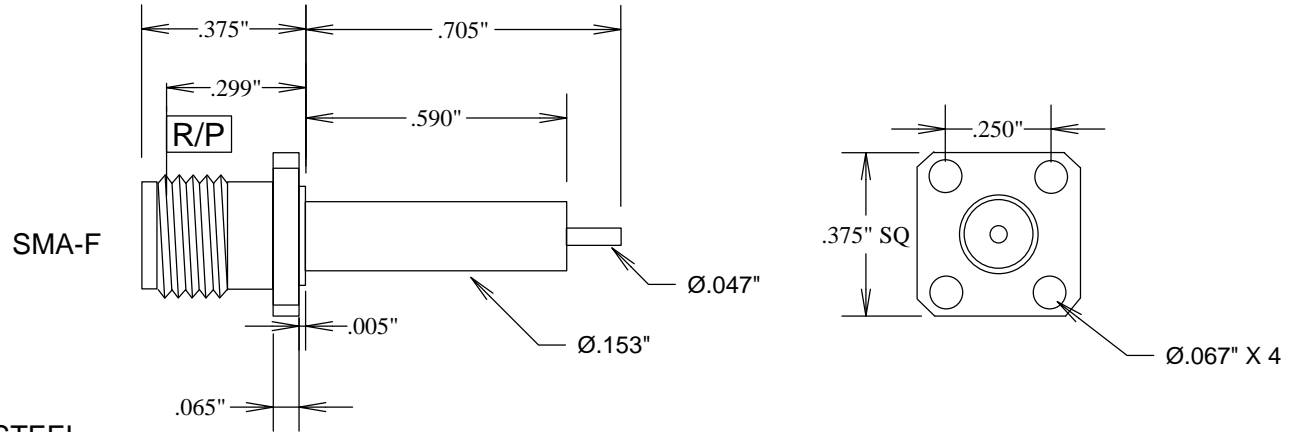

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMA-F PANEL POST CONTACT 27 GHZ**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>SC3028</b>	--
SCALE	SHEET		