



TNC Male Connector Crimp/Solder Attachment For RG55, RG142, RG223, RG400 Cable

TNC male connector with crimp/solder attachment for RG55, RG142, RG223 and RG400, part number SC4263, from Fairview Microwave is in-stock and ships same day. This TNC male connector operates up to a maximum frequency of 12.4 GHz and offers excellent VSWR of 1.2:1.

Fairview's TNC male connector SC4263 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		12.4	GHz
VSWR			1.2:1	

Mechanical Specifications

Size Length Width/Dia. Weight

1.063 in [27 mm] 0.59 in [14.99 mm] 0.037 lbs [16.78 g]

-55 to +155 deg C

Material Specifications

Material	Plating		
Brass	Gold MIL-G-45204		
PTFE			
Brass	Nickel QQ-N-290		
Brass	Nickel QQ-N-290		
	Brass PTFE Brass		

Environmental Specifications Temperature

Operating Range

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:



Configuration:

- TNC Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- RG55, RG142, RG223, RG400 Interface Type
- Crimp/Solder Attachment

Features:

- Operating Frequency of 12.4 GHz Max.
- Excellent VSWR of 1.2:1
- Gold Plated Brass Contact
- Contact plating according to MIL-G-45204

Applications:


- General Purpose Test
- Custom Cable Assemblies

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fay: (972) 649-6689

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



Assembly Instruction

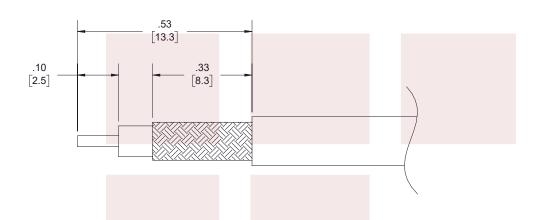

ASSEMBLY PROCEDURES

- STRIP CABLE TO THE DIMENSIONS SHOWN, DO NOT NICK CENTER CONDUCTOR OR BRAID.
- PUSH CONTACT FULLY INTO THE CENTER CONDUCTOR AND SOLDER.
- 3. FLARE BRAID AND INSERT THE BODY UNTIL IT SEATS.
- 4. SLIDE FERRULE OVER BRAID AND CRIMP WITH CRIMP TOOL.

CRIMP SIZE REQUIRED

- CONTACT: SOLDER.
- FERRULE: .213 [5.41] HEX CRIMP TOOL.

TNC Male Connector Crimp/Solder Attachment For RG55, RG142, RG223, RG400 Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: TNC Male Connector Crimp/Solder Attachment For RG55, RG142, RG223, RG400 Cable SC4263


URL: https://www.fairviewmicrowave.com/tnc-male-standard-rg55-rg142-rg223-rg400-connector-sc4263-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





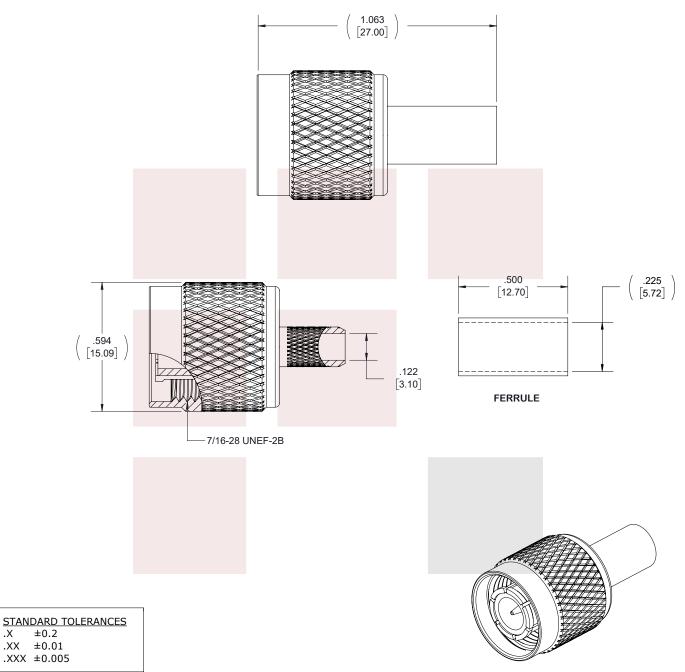

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

±0.2

.X

