SMP-MALE PCB
SMOOTH BORE CATCHERS MITT

SC5329

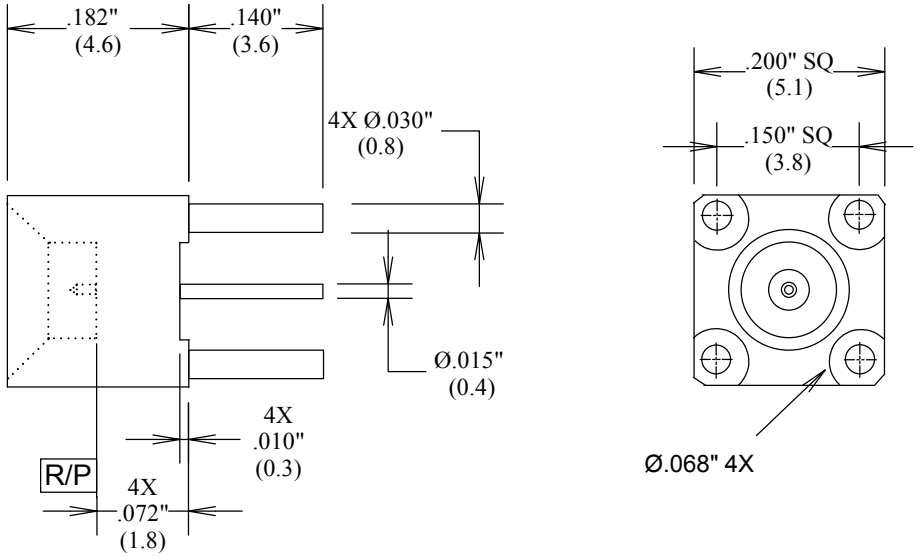

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACT: BeCu
PLATING: Au MIL-G-45204
INSULATOR: TEFLON
INTERFACE: DESC 94007

SMOOTH BORE
FORCE TO ENGAGE: 2.0 LBS MAX
FORCE TO DISENGAGE: 0.5 LBS MIN

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE: SMP-MALE PCB SMOOTH BORE CATCHERS MITT			
SIZE: A	CAGE CODE: 3FKR5	DWG NO: SC5329	REV: B
SCALE		SHEET	