

# SMP Male Full Detent PCB Connector .065 inch End Launch Solder Attachment

SMP male full detent connector with solder attachment for .065 inch end launch PCB, part number SC5382, from Fairview Microwave is in-stock and ships same day. This SMP male connector operates up to a maximum frequency of 40 GHz. This blind mate connector is ideal for applications without direct visual or tactile access to the connection point, for example, when two circuit boards need to be mated.

Fairview's SMP male connector SC5382 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

### **Electrical Specifications**

DescriptionMinTypMaxUnitsFrequency RangeDC40GHzMechanical SpecificationsSize Length Width/Dia.0.307 in [7.8 mm] 0.194 in [4.93 mm]0.0025 lbs [1.13 g]					
Mechanical Specifications    Size    Length    Width/Dia.      0.194 in [4.93 mm]	Description	Min	Тур	Max	Units
Size      0.307 in [7.8 mm]        Length      0.194 in [4.93 mm]	Frequency Range	DC		40	GHz
	<b>Size</b> Length Width/Dia.	ons	0.194	4 in [4.93 mm]	

#### Material Specifications

Description	Material	Plating		
Contact	Beryllium Copper	Gold MIL-G-45204		
Insulation	PTFE			
Body	Beryllium Copper	Gold MIL-G-45204		

#### **Environmental Specifications**

Temperature

Operating Range

-55 to +155 deg C

Compliance Certifications (see product page for current document)

## **Plotted and Other Data**

Notes:



DATA SHE

SC538

# **Configuration:**

- Full Detent SMP Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- .065 inch End Launch Interface
  Type
- Solder Attachment

## **Features:**

- Operating Frequency of 40 GHz Max.
- Blind Mate Connector
- Gold Plated Beryllium Copper Contact
- Contact plating according to MIL-G-45204

## **Applications:**

- General Purpose Test
- PCB Applications

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





SMP Male Full Detent PCB Connector .065 inch End Launch Solder Attachment from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SMP Male Full Detent PCB Connector .065 inch End Launch Solder Attachment SC5382

URL: https://www.fairviewmicrowave.com/smp-male-standard-full-detent-0.065-end-launch-pcb-connector-sc5382-p. aspx







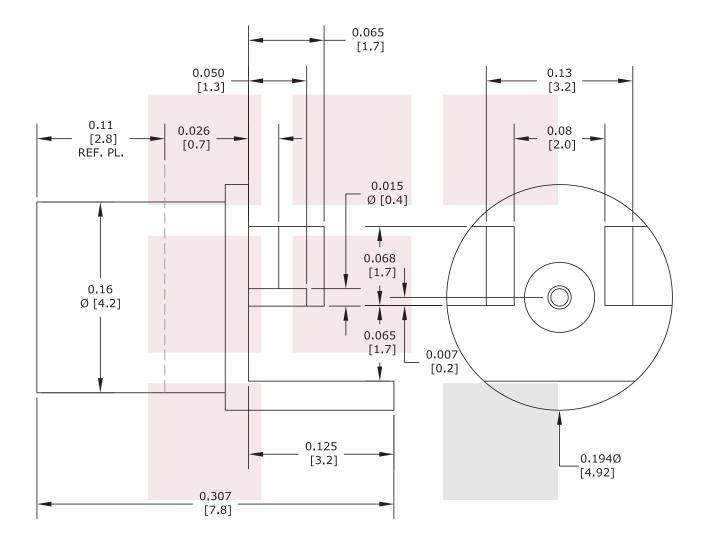

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
SMP Male Full Detent PCB Connector .065 inch End Launch Solder Attachment	DWG NO SC5382		CA	CAGE CODE 3FKR5	
	CAD FILE 041014	SHEET	SCALE N	/A SIZE A	150

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689