SMP MALE THREAD IN SHROUD SMOOTH BORE CATCHERS MITT

SC5518

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-40 GHZ IMPEDANCE: 50 OHMS

OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: PASSIVATED S STEEL INTERFACE: SMP DESC 94007 SMOOTH BORE CATCHERS MITT FORCE TO ENGAGE: 2.0 LBS MAX FORCE TO DISENGAGE: 0.5 LBS MIN

ROHS COMPLIANT

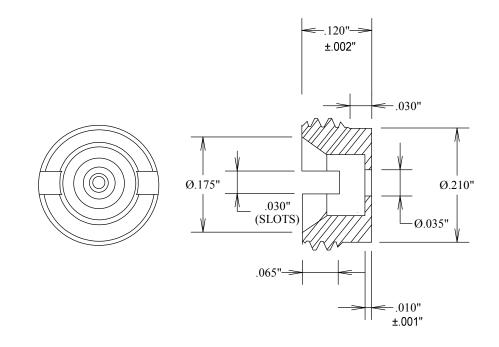

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMP MALE THREAD IN SHROUD SMOOTH BORE CATCHERS MITT

SIZE CAGE CODE DWG NO A 3FKR5 SC5518 --- SCALE SHEET

4