

SMA Male (Plug) Connector For RG316, RG174, RG188, LMR-100, LMR-100A, 0.100 inch Cable, Crimp/Solder, Ni Plated Brass Body, Length 0.59 In

SMA male connector with crimp/solder attachment for 0.100 inch, RG316, RG174, RG188, LMR-100, LMR-100A and LMR-100A-FR, part number SC7059, from Fairview Microwave is in-stock and ships same day. This SMA male connector operates up to a maximum frequency of 6 GHz and offers excellent VSWR of 1.21:1.

Fairview's SMA male connector SC7059 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		6	GHz
VSWR			1.21:1	
Operating Voltage (AC)			335	Vrms

Mechanical Specifications

Size	
Length	0.593 in [15.06 mm]
Width/Dia.	0.312 in [7.92 mm]
Weight	0.013 lbs [5.9 g]
Mating Torque	3 to 5 in-lbs [0.34 to 0.57 Nm]

Material Specifications

Description	Material	Plating
Contact	Brass	Gold 50 µin minimum
Insulation	PTFE	
Body	Brass	Nickel 100 µin minimum
Coupling Nut	Brass	Nickel 100 µin minimum

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Configuration:

- SMA Male Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry
- 0.100 inch, RG316, RG174, RG188, LMR-100, LMR-100A, LMR-100A-FR Interface Type
- Crimp/Solder Attachment
- 5/16 inch Hex

Features:

- Operating Frequency of 6 GHz Max.
- Excellent VSWR of 1.21:1
- Gold Plated Brass Contact
- 50 µin minimum contact plating

Applications:

- General Purpose Test
- Custom Cable Assemblies


Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

SMA Male (Plug) Connector For RG316, RG174, RG188, LMR-100, LMR-100A, 0.100 inch Cable, Crimp/Solder, Ni Plated Brass Body, Length 0.59 In from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Male \(Plug\) Connector For RG316, RG174, RG188, LMR-100, LMR-100A, 0.100 inch Cable, Crimp/Solder, Ni Plated Brass Body, Length 0.59 In SC7059](#)

URL: <https://www.fairviewmicrowave.com/sma-male-0.100-rg316-rg174-rg188-lmr-100-lmr-100a-lmr-100a-fr-connector-sc7059-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

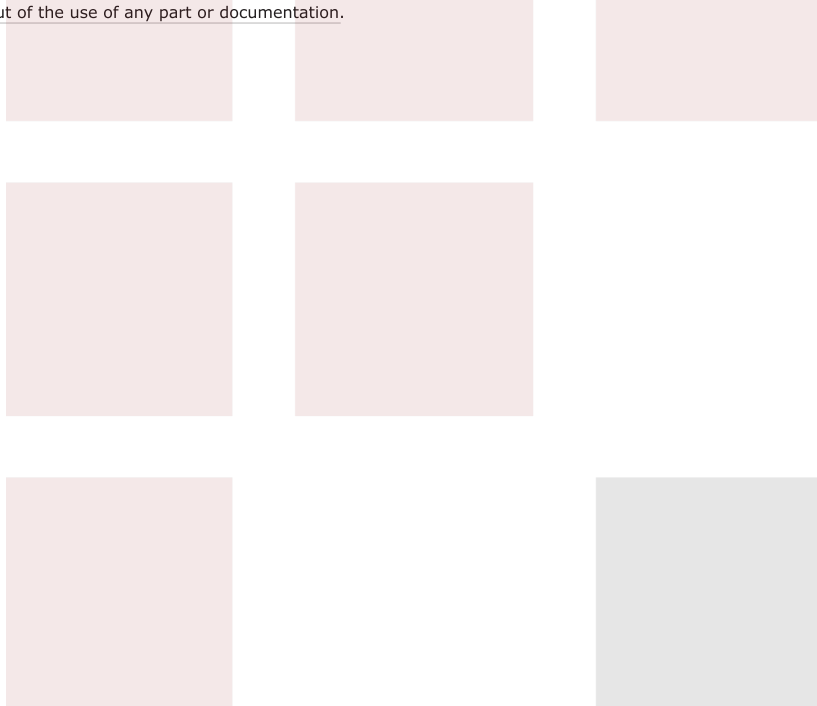

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/02/2021	SELLIS

The drawing shows the SMA Male Connector with the following dimensions and features:

- Overall length: .59 [15.1]
- Pin length: .34 [8.60]
- Pin diameter: ϕ .16 [4.0]
- Pin diameter tolerance: .024 [0.60]
- Pin diameter tolerance: .37 [9.5]
- Hex diameter: .31 [8.0] HEX
- Hex diameter tolerance: .138 [3.5] HEX
- Pin diameter tolerance: .025 [0.64] SQ.
- Pin diameter tolerance: .177 [4.50]
- Pin diameter tolerance: .346 [8.80]
- Pin diameter tolerance: .098 [2.50]

Assembly options shown:

- RECOMMENDED FERRULE CRIMP SIZE
- RECOMMENDED PIN SOLDER & CRIMP
- RECOMMENDED CABLE STRIPPING

1/4-36UNS-2B

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p>Fairview Microwave an INFINIT[®] brand</p>	<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES: CABLE LENGTH (L) TOLERANCES:</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">.X = ± 2 [5.08]</td> <td style="border: none;">FRACTIONS</td> <td style="border: none;">12 [305] < L ≤ 60 [1524] = +1 [25] / -0</td> </tr> <tr> <td style="border: none;">.XX = ± .02 [.51]</td> <td style="border: none;">± 1/32</td> <td style="border: none;">60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td> </tr> <tr> <td style="border: none;">.XXX = ± .005 [.13]</td> <td style="border: none;">ANGLES ± 1°</td> <td style="border: none;">120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;"></td> <td style="border: none;">300 [7620] < L = +5%L / -0</td> </tr> </table>	.X = ± 2 [5.08]	FRACTIONS	12 [305] < L ≤ 60 [1524] = +1 [25] / -0	.XX = ± .02 [.51]	± 1/32	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	.XXX = ± .005 [.13]	ANGLES ± 1°	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0			300 [7620] < L = +5%L / -0	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.</p>
.X = ± 2 [5.08]	FRACTIONS	12 [305] < L ≤ 60 [1524] = +1 [25] / -0												
.XX = ± .02 [.51]	± 1/32	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0												
.XXX = ± .005 [.13]	ANGLES ± 1°	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0												
		300 [7620] < L = +5%L / -0												
<p>TITLE</p> <p>SMA Male (Plug) Connector For RG316, RG174, RG188, LMR-100, LMR-100A, 0.100 inch Cable, Crimp/Solder, Ni Plated Brass Body, Length 0.59 In</p>		<p>SHEET 1 OF 1</p>												
<p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>		<p>SCALE N/A</p>												
<p>SIZE A</p>	<p>CAGE CODE 3FKR5</p>	<p>DRAWN BY DFRISIELLO</p>												
<p>ITEM NO. SC7059</p>		<p>REV A</p>												

T-Rev.D