



# SMA Female Bulkhead PCB Connector .062 inch End Launch Solder Attachment

SMA female bulkhead connector with solder attachment for .062 inch end launch PCB, part number SC8435, from Fairview Microwave is in-stock and ships same day. This SMA female connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.25:1. Fairview's SC8435 bulkhead SMA connector enables designers to make external connections on product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Fairview's SMA female bulkhead connector SC8435 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

#### **Electrical Specifications**

Min	Тур	Max	Units
DC		18	GHz
		1.25:1	
		335	Vrms
		.,,,	DC 18 1.25:1

### **Mechanical Specifications**

Size

Length	0.74 in [18.8 mm]
Width/Dia.	0.281 in [7.14 mm]
Height	0.281 in [7.14 mm]
Weight	0.0085 lbs [3.86 g]

#### **Material Specifications**

Description	Material	Plating
Contact	Beryllium Copper	Gold 50 µin minimum
Insulation	PTFE	
Outer Conductor	Brass	Gold 3 µin minimum

# **Environmental Specifications**

Temperature

Operating Range -65 to +165 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:



## **Configuration:**

- SMA Female Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry
- .062 inch End Launch Interface Type
- Solder Attachment
- Bulkhead

#### Features:

- Operating Frequency of 18 GHz Max.
- Excellent VSWR of 1.25:1
- Gold Plated Beryllium Copper Contact
- 50 µin minimum contact plating

## **Applications:**

- General Purpose Test
- Rack and Panel Mount Applications
- PCB Applications

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com






#### **Assembly Instruction**

SMA Female Bulkhead PCB Connector .062 inch End Launch Solder Attachment from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SMA Female Bulkhead PCB Connector .062 inch End Launch Solder Attachment SC8435

URL: https://www.fairviewmicrowave.com/sma-female-standard-0.062-end-launch-pcb-connector-sc8435-p.aspx

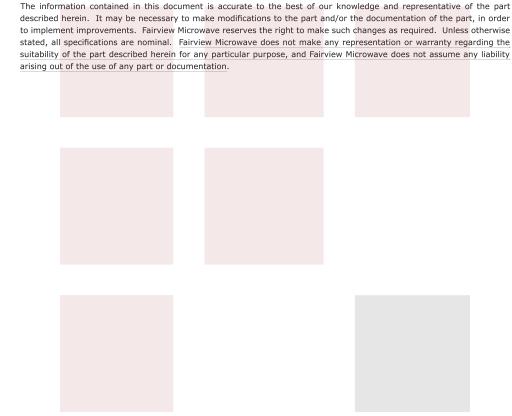





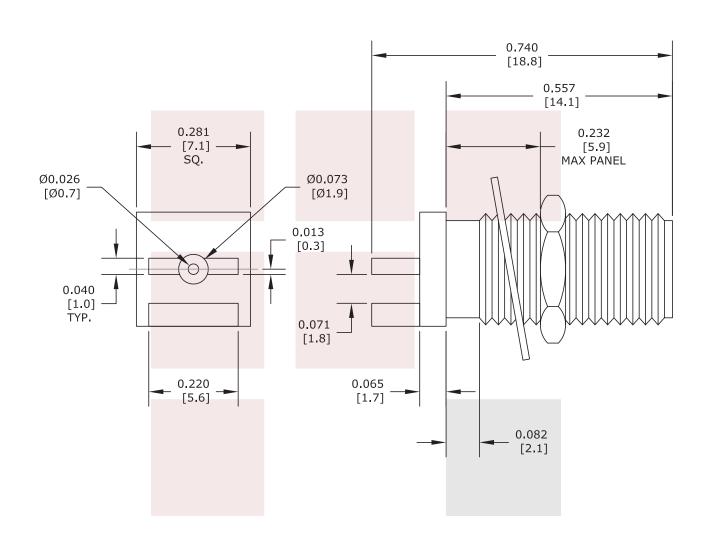

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
SMA Female Bulkhead PCB Connector .062 inch End Launch Solder Attachment	DWG NO SC8435		'	CAGE CODE 3FKR5		
	CAD FILE 062317	SHEET	SCALE	N/A	SIZE A	2233