

Inner DC Block From 10 MHz to 50 GHz With 2.4mm Connectors

Fairview Microwave's SD3385 is an inner DC block with 2.4mm connectors. It has a blocking capacitor on the inner conductor and operates from 10 MHz to 50 GHz. Our 2.4mm DC block offers good insertion loss of 1.25 dB and has a maximum operating voltage of 100 Vdc. DC blocks are commonly used to filter out unwanted DC signals, while allowing AC drive signals to pass through. They can help improve signal to noise ratio (SNR), eliminate ground loops, or provide isolation in your test setup. All of Fairview Microwave's DC blocks are in stock and available to ship same-day.



Features:

- Inner DC Block
- Operates from 10 MHz to 50 GHz
- Good Insertion Loss of 1.25 dB Max

Applications:

- Test & Measurement
- Ground Loop Elimination
- Signal to Noise Ratio (SNR) Improvement

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	0.01		50	GHz
Impedance		50		Ohms
VSWR			1.65:1	
Insertion Loss			1.25	dB
Operating Voltage (DC)			100	Volts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.01 - 40	40 - 50				GHz
Insertion Loss, Max	1	1.25				dB

Mechanical Specifications

Size

Length	0.871 in [22.12 mm]
Width	0.312 in [7.92 mm]
Weight	0.014 lbs [6.35 g]
Housing Material and Plating	Passivated Stainless Steel
Housing Plating Specification	ASTM A380

Configuration

Design	Inner DC Block
Package Type	Connectorized

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Female
Inner Cond Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Inner Cond Plating Spec.	MIL-PRF-39012	MIL-PRF-39012
Dielectric Type	Plastic	Plastic
Coupling Nut Material & Plating	Passivated Stainless Steel	
Coupling Nut Plating Spec.	ASTM A380	
Hex Size	5/16 inch	
Torque	9 in-lbs [1.02 Nm]	
Body Material & Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Spec.	ASTM A380	ASTM A380

Environmental Specifications

Temperature



Operating Range -35 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

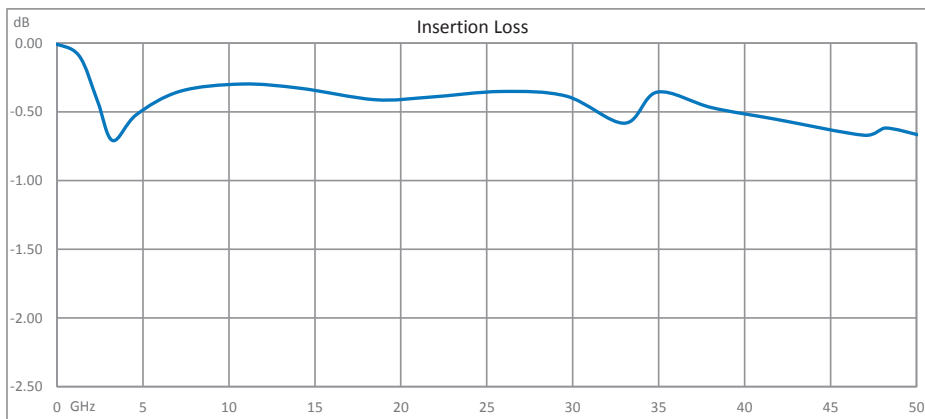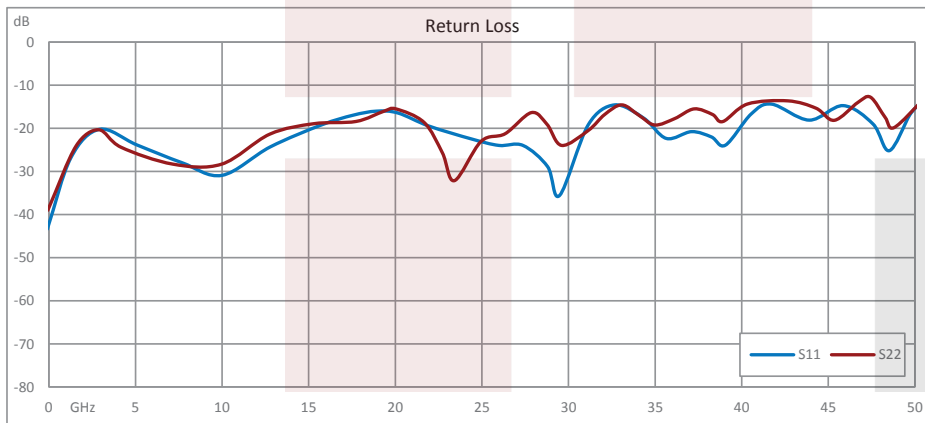



Inner DC Block From 10 MHz to 50 GHz With 2.4mm Connectors from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Inner DC Block From 10 MHz to 50 GHz With 2.4mm Connectors SD3385](#)

URL: <https://www.fairviewmicrowave.com/inner-dc-block-10-mhz-50-ghz-2.4mm-connectors-sd3385-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

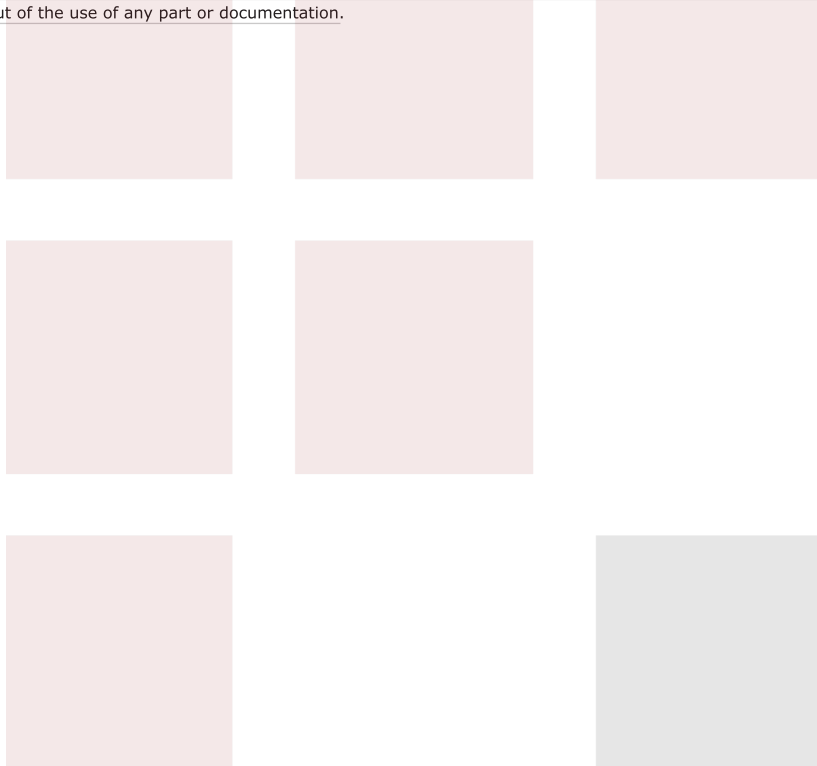

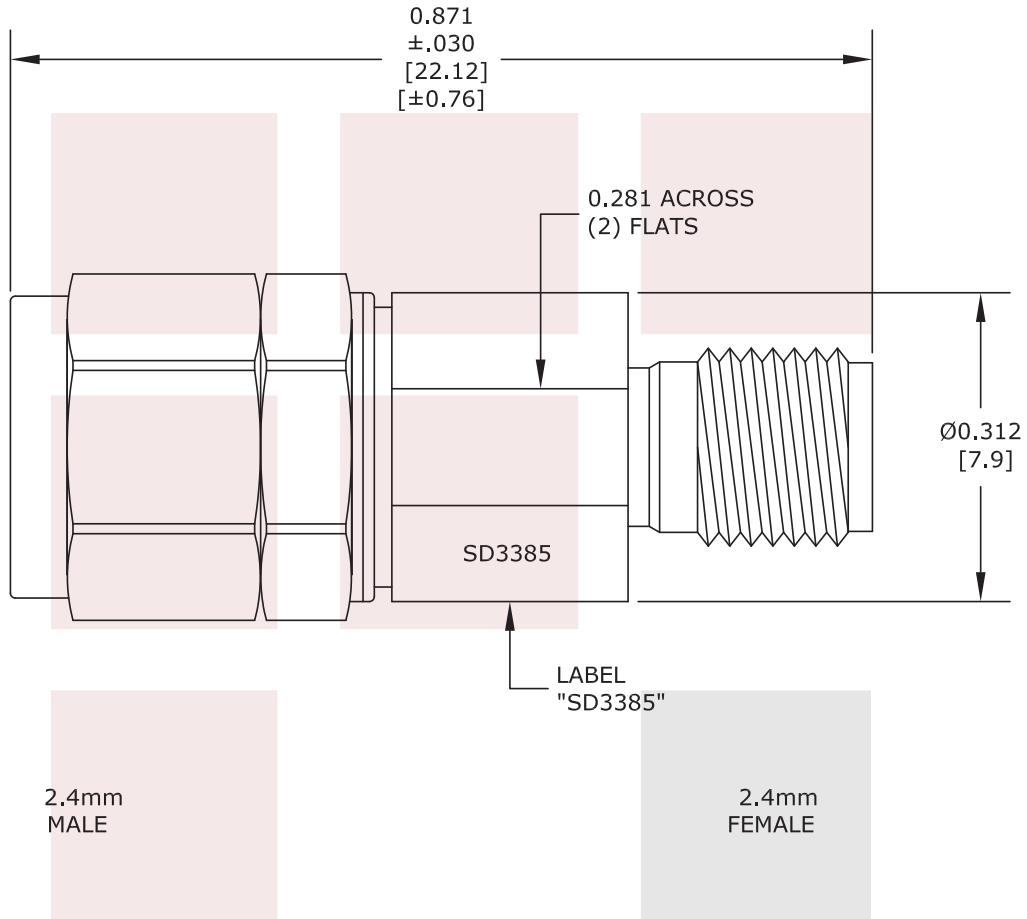

STANDARD TOLERANCES	
.X	± 0.2
.XX	± 0.1
.XXX	± 0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Inner DC Block From 10 MHz to 50 GHz With 2.4mm Connectors		DWG NO SD3385		CAGE CODE 3FKR5	
CAD FILE	102016	SHEET	SCALE	N/A	SIZE A 41742