



Matching Pad 50 Ohm N Male to 75 Ohm BNC Female Operating from DC to 1 GHz

Fairview Microwave's SI1540 is a 50 ohm type N male to 75 ohm BNC female matching pad that operates from DC to 1,000 MHz. This type N to BNC impedance matching pad offers a VSWR of 1.4:1 max. SI1540 50 ohm to 75 ohm minimum loss pad has a maximum CW power rating of 1 Watt.

Matching pads are used to match the different impedance between two devices, maximizing power transfer between the two impedances. Fairview Microwave's minimum loss impedance matching pads are available in various connector combinations to fit your needs, all of which ship the same day.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Attenuation		5.7		dB
Input Power, CW			1	Watt

Electrical Specification Notes: Values at +25°C, sea level.

Mechanical Specifications Size

 Length
 2.26 in [57.4 mm]

 Width
 0.83 in [21.08 mm]

 Height
 0 in [0 mm]

Weight 0.104 lbs [47.17 g]

Housing Material and Plating Brass, Tri-Metal

Connector 1

Description	Connector
Туре	N Male
Impedance	50 Ohms
Inner Conductor Material and Plating	Gold
Dielectric Type	PTFE
Body Material and Plating	Brass, Tri-Metal

Connector 2

Description	Connector		
Туре	BNC Female		
Impedance	75 Ohms		
Inner Conductor Material and Plating	Gold		
Dielectric Type	PTFE		
Body Material and Plating	Brass, Tri-Metal		



Configuration:

Connector 1: 50 Ohms N MaleConnector 2: 75 Ohms BNC

Female

Features:

- DC to 1,000 MHz Frequency Range
- VSWR < 1.4:1
- 1W Max CW Power

Applications:

- CATV / Cable Networks
- Test and Measurement
- Communication Systems
- Wireless Systems

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Matching Pad 50 Ohm N Male to 75 Ohm BNC Female Operating from DC to 1 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Matching Pad 50 Ohm N Male to 75 Ohm BNC Female Operating from DC to 1 GHz SI1540


URL: https://www.fairviewmicrowave.com/matching-pad-50-ohm-n-male-75-ohm-bnc-female-2-ghz-si1540-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





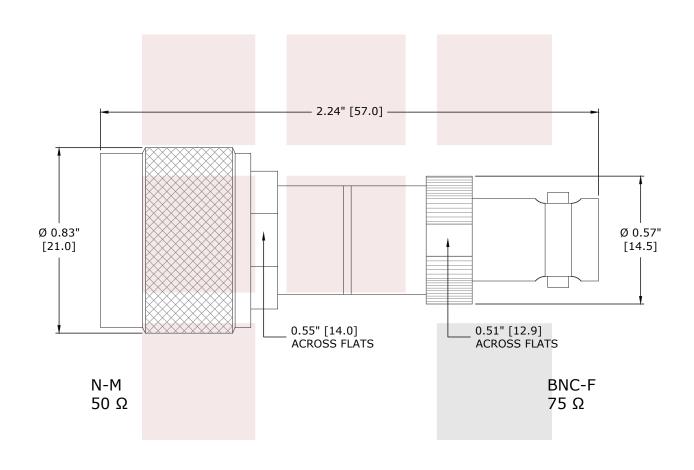

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Matching Pad 50 Ohm N Male to 75 Ohm BNC Female Operating from DC to 1 GHz	DWG NO SI1540			CAGE CODE 3FKR5		
	CAD FILE 101915	SHEET	SCALE	N/A	SIZE A	5568