

# SM3350 DATA SHEET

## Precision 3.5mm Male to N Female Adapter

Precision 3.5mm male to type N female adapter part number SM3350 from Fairview Microwave is in-stock and ships same day. This Fairview 3.5mm to type N adapter has a male to female gender configuration in a precision design. SM3350 3.5mm male to type N female adapter operates to 18 GHz. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Мах	Units
Frequency Range	DC		18	GHz
VSWR			1.15:1	

Electrical Specification Notes: Values at 25°C, sea level.

### **Mechanical Specifications**

<b>Size</b> Length Weight			I.372 in [34.85 mm] ).056 lbs [25.4 g]	
Description	Connect	tor 1	Connector 2	
Туре	3.5mm	Male	N Female	
Polarity	Standa	ard	Standard	
Mating Cycles	500	)	500	
Mating Torque	8 to 10 in-lbs			
	[0.90 to 1.	13 Nm]		



### **Configuration:**

- 3.5mm Male Connector 1
- N Female Connector 2
- 50 Ohms
- Precision Design
- Straight Body Geometry

### Features:

- VSWR of 1.15:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated
  Beryllium Copper Contact

### **Applications:**

- Enables Between Series
  Connections
- General Purpose Test
- Precision Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Material Specifications**

Description	Connector 1	Connector 2
Туре	3.5mm Male	N Female
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold over Nickel	Gold over Nickel
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	Oxide-Noryl	Oxide-Noryl
Outer Contact Material		Passivated Stainless Steel
Outer Conductor Contact Spe	ec.	ASTM A380
Body Material	Passivated Stainless Steel	
Body Plating Spec.	ASTM A380	
Coupling Nut Material	Passivated Stainless Steel	
Coupling Nut Plating Spec.	ASTM A380	

### **Environmental Specifications**

**Temperature** Operating Range


Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

#### **Typical Performance Data**

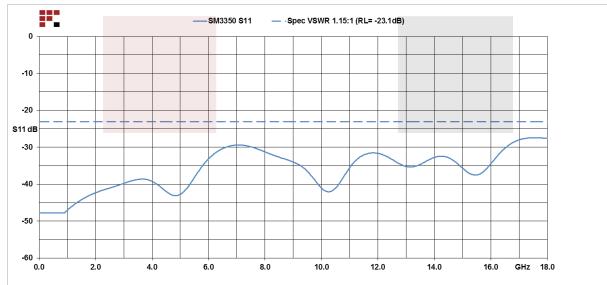





Precision 3.5mm Male to N Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Precision 3.5mm Male to N Female Adapter SM3350

The information contained in this document is accurate to the best of our knowledge and representative of the part


URL: https://www.fairviewmicrowave.com/3.5mm-male-n-female-adapter-sm3350-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





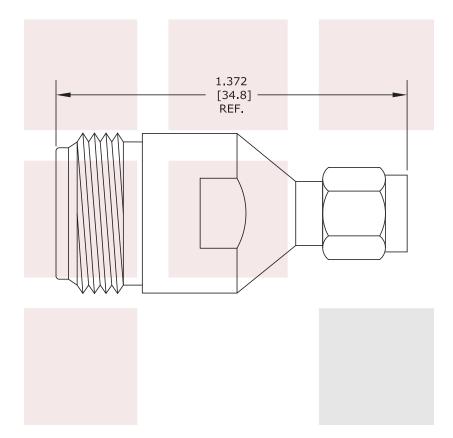

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE Precision 3.5mm Male to N Female Adapter	DWG NO SM3350			CAGE CODE 3FKR5		
	CAD FILE 120315	SHEET	SCAL	E N/A	SIZE A	150

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689