

SM3510 DATA SHEET

N Male to BNC Female Adapter

Type N male to BNC female adapter part number SM3510 from Fairview Microwave is in-stock and ships same day. This Fairview type N to BNC adapter has a male to female gender configuration. SM3510 type N male to BNC female adapter operates to 4 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	
Width	

Weight

1.31 in [33.27 mm] 0.781 in [19.84 mm] 0.079 lbs [35.83 g]

Description	Connector	1 Connector 2	
Туре	N Male	BNC Female	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-34	MIL-STD-348	



Configuration:

- N Male Connector 1
- BNC Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 4 GHz
- Type N interface meets MIL-STD-348
- BNC interface meets MIL-STD-348
- Contact plating according to ASTM B700
- Silver Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications


Description	Connector 1	Connector 2		
Туре	N Male	BNC Female		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Silver	Silver		
Contact Plating Spec.	ASTM B700	ASTM B700		
Insulation Material	PTFE	PTFE		
Outer Contact Material		Brass		
Outer Contact Plating	Nickel			
Outer Conductor Contact Spec	3 .	QQ-N-290		
Body Material	Brass	Brass		
Body Plating	Nickel	Nickel		
Body Plating Spec.	QQ-N-290	QQ-N-290		
Coupling Nut Material	Brass			
Coupling Nut Plating	Nickel			
Coupling Nut Plating Spec.	QQ-N-290			

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

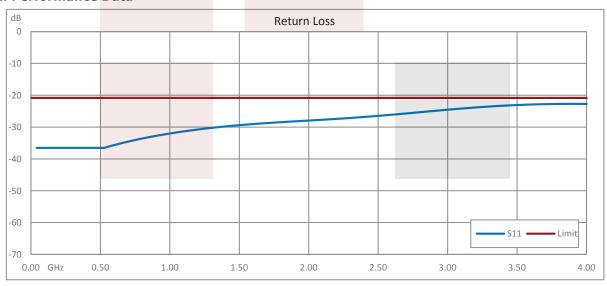





N Male to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: N Male to BNC Female Adapter SM3510

URL: https://www.fairviewmicrowave.com/n-male-bnc-female-adapter-sm3510-p.aspx

stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.	to implem	nent improveme	ents. Fairview	/ Microwa	ave reserv	es the righ	nt to mak	e such	changes	as requ	ired. Unles	s otl	herwise
	stated, al	l specifications	are nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presentat	ion or v	warranty re	gard	ling the
arising out of the use of any part or documentation.	suitability	of the part de	scribed hereir	n for any	particular	purpose,	and Fair	view M	icrowave	does n	ot assume	any	liability
	arising ou	t of the use of	any part or do	ocument	ation.								





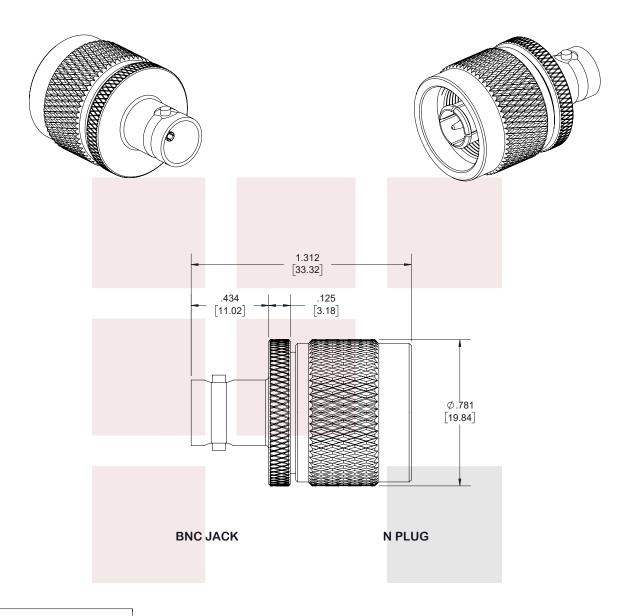

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
N Male to BNC Female Adapter	DWG NO SM3510				CAGE CODE 3FKR5		
	CAD FILE 120517	SHEET 1 OF 1	SCAL	E N/A	SIZE A	7361	