

SM3925 DATA SHEET

HN Male to BNC Female Adapter

HN male to BNC female adapter part number SM3925 from Fairview Microwave is in-stock and ships same day. This Fairview HN to BNC adapter has a male to female gender configuration. SM3925 HN male to BNC female adapter operates to 4 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

| Description | Min | Тур | Max | Units | |
|-----------------|-----|-----|-------|-------|--|
| Frequency Range | DC | | 4 | GHz | |
| VSWR | | | 1.2:1 | | |

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

| Size | |
|--------|--|
| Lenatl | |

Width Weight 1.5 in [38.1 mm] 0.88 in [22.35 mm] 0.10318 lbs [46.8 g]

| Description | Connector 1 | Connector 2 | |
|-------------------------|-------------|-------------|--|
| Туре | HN Male | BNC Female | |
| Polarity | Standard | Standard | |
| Interface Specification | MIL-STD-348 | MIL-STD-348 | |



Configuration:

- HN Male Connector 1
- BNC Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 4 GHz
- HN interface meets MIL-STD-348
- BNC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications


| Description | Connector 1 | Connector 2 | | |
|-----------------------------|-------------|------------------|--|--|
| Туре | HN Male | BNC Female | | |
| Contact Material | Brass | Beryllium Copper | | |
| Contact Plating | Gold | Gold | | |
| Contact Plating Spec. | MIL-G-45204 | MIL-G-45204 | | |
| Insulation Material | PTFE | PTFE | | |
| Outer Contact Material | Brass | | | |
| Outer Contact Plating | | Nickel | | |
| Outer Conductor Contact Spe | ec. | QQ-N-290 | | |
| Body Material | Brass | | | |
| Body Plating | Nickel | | | |
| Body Plating Spec. | QQ-N-290 | | | |
| | | | | |

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

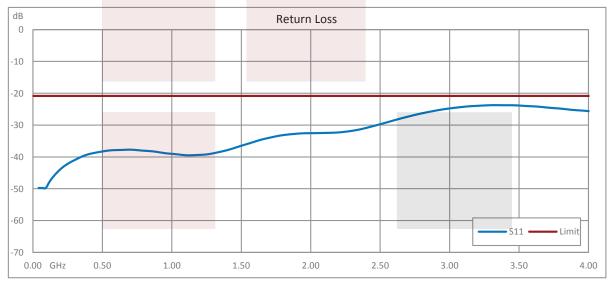





HN Male to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: HN Male to BNC Female Adapter SM3925

URL: https://www.fairviewmicrowave.com/hn-male-bnc-female-adapter-sm3925-p.aspx

| | nent improv | | | | | | | | | | | | |
|-------------|---------------|-----------|------------|---------|-------------|------------|----------|--------|---------|--------|-----------|-----|-----------|
| | l specificati | | | | | | | | | | | | |
| suitability | of the par | t describ | ed hereir | for any | y particula | r purpose, | and Fair | view M | crowave | does r | ot assume | any | liability |
| arising ou | it of the use | e of any | part or do | ocument | ation. | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |





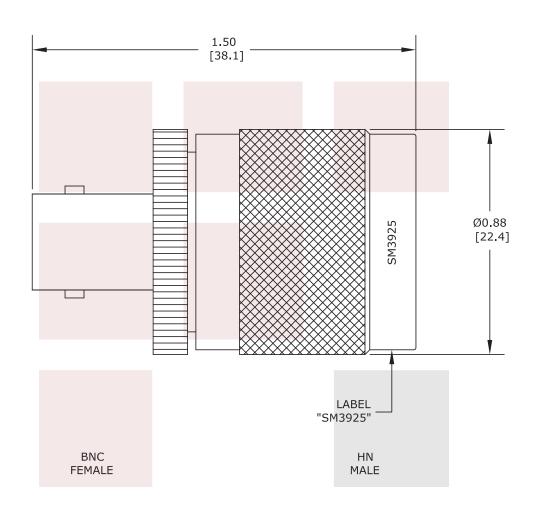

STANDARD TOLERANCES .X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | | |
|--|---|-----------------|------|-------|-----------------|-------|--|
| HN Male to BNC Female Adapter | DWG NO | vg no SM3925 | | | CAGE CODE 3FKR5 | | |
| | CAD FILE 101016 | SHEET | SCAL | E N/A | SIZE A | 41742 | |