

SM4422 DATA SHEET

Low PIM 7/16 DIN Male to N Female Adapter IP67 Mated

Low PIM 7/16 DIN male to type N female adapter part number SM4422 from Fairview Microwave is in-stock and ships same day. This Fairview 7/16 DIN to type N adapter has a male to female gender configuration in a low PIM design. SM4422 7/16 DIN male to type N female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum and passive intermodulation of -160 dBc maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		6	GHz
VSWR			1.15:1	
Passive Intermodulation			-160	dBc
(using 2x20W tones)				
Operating Voltage (AC)			1,000	Vrms
DWV (AC)			2,500	Vrms

Electrical Specification Notes:

Values at 25°C, sea level.

Mechanical Specifications

Size Length Width Weight

1.6 in [40.64 mm] 1.25 in [31.75 mm] 0.2485 lbs [112.72 g]

Description	Connector 1	Connector 2		
Туре	7/16 DIN Male	N Female		
Polarity	Standard	Standard		
Hex Size	32 mm			
Mating Torque	221 to 265 in-lbs			
	[24.97 to 29.95 Nm]			



Configuration:

- 7/16 DIN Male Connector 1
- N Female Connector 2
- 50 Ohm
- Low PIM Design
- Straight Body Geometry

Features:

- VSWR of 1.15:1 max up to 6 GHz
- PIM levels better than -160 dBc
- Rated IP67 Mated
- 5 µm minimum contact plating
- · Silver Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test
- Low PIM Applications

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2
Туре	7/16 DIN Male	N Female
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Silver	Silver
Contact Plating Spec.	5 μm minimum	5 µm minimum
Insulation Material	PTFE	PTFE
Outer Contact Material		Brass
Outer Contact Plating		Tri-Metal
Body Material	Brass	
Body Plating	Tri-Metal	
Coupling Nut Material	Brass	
Coupling Nut Plating	Tri-Metal	

Environmental Specifications

Temperature


Operating Range Ingress Protection (IP) Rating -45 to +120 deg C IP67 Mated

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

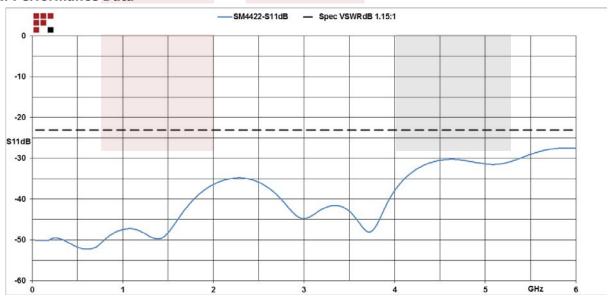





Low PIM 7/16 DIN Male to N Female Adapter IP67 Mated from Fairview Microwave is in-stock and available to ship sameday. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: Low PIM 7/16 DIN Male to N Female Adapter IP67 Mated SM4422

URL: https://www.fairviewmicrowave.com/7-16-male-n-female-adapter-sm4422-p.aspx







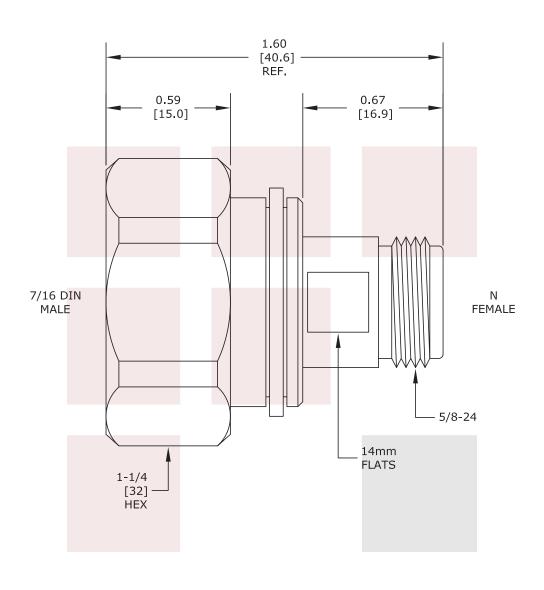

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
Low PIM 7/16 DIN Male to N Female Adapter IP67 Mated	DWG NO SM4422			CAGE CODE 3FKR5	
	CAD FILE 061114	SHEET	SCALE	≣ N/A	SIZE A