

SM4525 DATA SHEET

RA N Male to N Male Adapter

RA type N male to type N male adapter part number SM4525 from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N adapter has a male to male gender configuration. SM4525 type N male to type N male adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. This right angle type N adapter allows for easier connections in tight spaces.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Min	Тур	Max	Units
DC		6	GHz
		1.2:1	
		, , , , , , , , , , , , , , , , , , ,	DC 6

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length	1.39 in [35.31 mm]
Height	1.39 in [35.31 mm]
Weight	0.1485 lbs [67.36 g]

Description	Connector 1	Connector 2	
Туре	N Male	N Male	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-STD-348	

Material Specifications

Description	Connector 1	Connector 2	
Туре	N Male	N Male	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Gold	Gold	
Contact Plating Spec.	MIL-G-45204	MIL-G-45204	
Insulation Material	PTFE	PTFE	
Body Material	Brass	Brass	
Body Plating	Nickel	Nickel	
Body Plating Spec.	QQ-N-290	QQ-N-290	



Configuration:

- N Male Connector 1
- N Male Connector 2
- 50 Ohm
- Right Angle Body Geometry

Features:

- VSWR of 1.2:1 max up to 6 GHz
- Type N interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

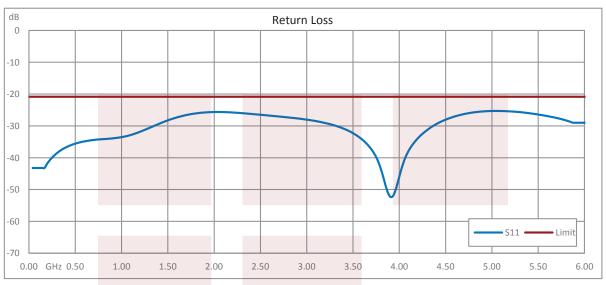

RA N Male to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: RA N Male to N Male Adapter SM4525

URL: https://www.fairviewmicrowave.com/ra-n-male-n-male-adapter-sm4525-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





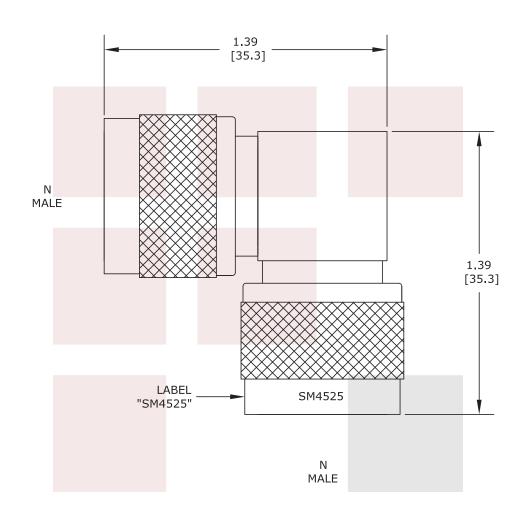

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
RA N Male to N Male Adapter	DWG NO SM4525			CAGE CODE 3FKR5		
	CAD FILE 101116	SHEET	SCALE	≣ N/A	SIZE A	41742