

SM4647 DATA SHEET

7/16 DIN Male to SC Female Adapter

7/16 DIN male to SC female adapter part number SM4647 from Fairview Microwave is in-stock and ships same day. This Fairview 7/16 DIN to SC adapter has a male to female gender configuration. SM4647 7/16 DIN male to SC female adapter operates to 7.5 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Min	Тур	Max	Units
DC		7.5	GHz
		1.25:1	
		1,000	Vrms
		3,000	Vrms
5,000			MOhms
	DC	DC	DC 7.5 1.25:1 1,000 3,000

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length Width Weight	1.	.75 in [44.45 mm] .25 in [31.75 mm] .22708 lbs [103 g]	
Description	Connector 1	Connector 2	
Туре	7/16 DIN Male	SC Female	
Polarity	Standard	Standard	
Interface Specification	MIL-C-39012	MIL-STD-348	
Mating Cycles	500	500	
Hex Size	1 1/4 inch		



Configuration:

- 7/16 DIN Male Connector 1
- SC Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.25:1 max up to 7.5 GHz
- 7/16 DIN interface meets MIL-C-39012
- SC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2	
Туре	7/16 DIN Male	SC Female	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Gold	Gold	
Contact Plating Spec.	MIL-G-45204	MIL-G-45204	
Insulation Material	PTFE	PTFE	
Outer Contact Material		Brass	
Outer Contact Plating		Nickel	
Outer Conductor Contact Spe	ec.	QQ-N-290	
Body Material	Brass		
Body Plating	Nickel		
Body Plating Spec.	QQ-N-290		
Coupling Nut Material	Brass		
Coupling Nut Plating	Nickel		
Coupling Nut Plating Spec.	QQ-N-290		

Environmental Specifications

Temperature Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

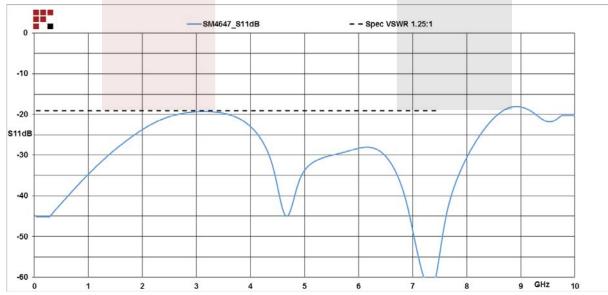





7/16 DIN Male to SC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/ microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part

For additional information on this product, please click the following link: 7/16 DIN Male to SC Female Adapter SM4647

URL: https://www.fairviewmicrowave.com/7-16-male-sc-female-adapter-sm4647-p.aspx


described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





41742

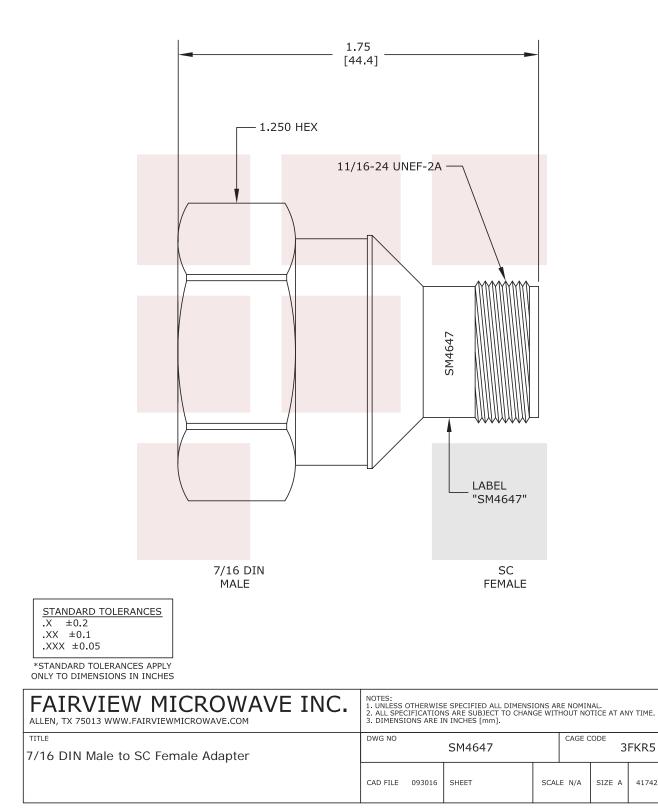

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689