

## MMCX Jack to SMA Male Adapter

MMCX jack to SMA male adapter part number SM4781 from Fairview Microwave is in-stock and ships same day. This Fairview MMCX to SMA adapter has a jack to male gender configuration. SM4781 MMCX jack to SMA male adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Operating Voltage (AC)			250	Vrms

Electrical Specification Notes:  
 Values at 25°C, sea level.

### Mechanical Specifications

#### Size

Length	0.606 in [15.39 mm]
Width	0.315 in [8 mm]
Weight	0.00661 lbs [3 g]

Description	Connector 1	Connector 2
Type	MMCX Jack	SMA Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A
Mating Cycles	500	500
Hex Size		5/16 inch
Mating Torque		3 to 5 in-lbs [0.34 to 0.57 Nm]



### Configuration:

- MMCX Jack Connector 1
- SMA Male Connector 2
- 50 Ohms
- Straight Body Geometry

### Features:

- VSWR of 1.25:1 max up to 6 GHz
- MMCX interface meets MIL-STD-348A
- SMA interface meets MIL-STD-348A
- 30 μin minimum contact plating
- Gold Plated Beryllium Copper Contact

### Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave  
 1130 Junction Dr. #100  
 Allen, TX 75013  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Material Specifications**

Description	Connector 1	Connector 2
Type	MMCX Jack	SMA Male
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold	Gold
Contact Plating Spec.	30 µin minimum	30 µin minimum
Insulation Material	PTFE	PTFE
Outer Contact Material	Brass	
Outer Contact Plating	Gold	
Outer Contact Plating Spec.	3 µin minimum	
Body Material		Brass
Body Plating		Gold
Body Plating Spec.		3 µin minimum
Coupling Nut Material		Brass
Coupling Nut Plating		Gold
Coupling Nut Plating Spec.		3 µin minimum

**Environmental Specifications**

**Temperature**

Operating Range


-55 to +155 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

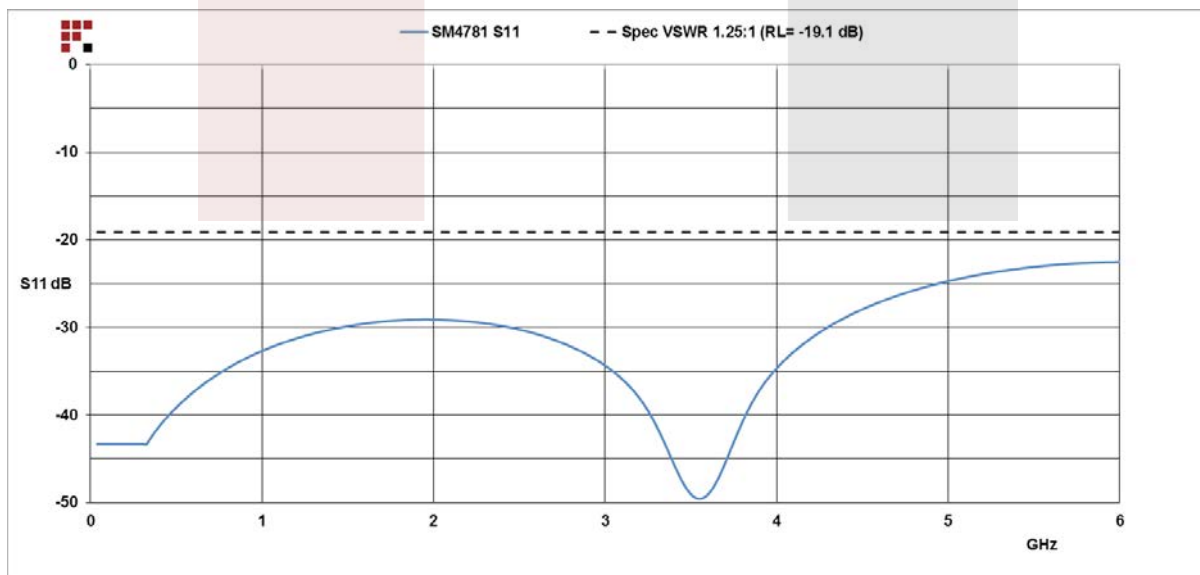


MMCX Jack to SMA Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [MMCX Jack to SMA Male Adapter SM4781](#)

URL: <https://www.fairviewmicrowave.com/mmcx-jack-sma-male-adapter-sm4781-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



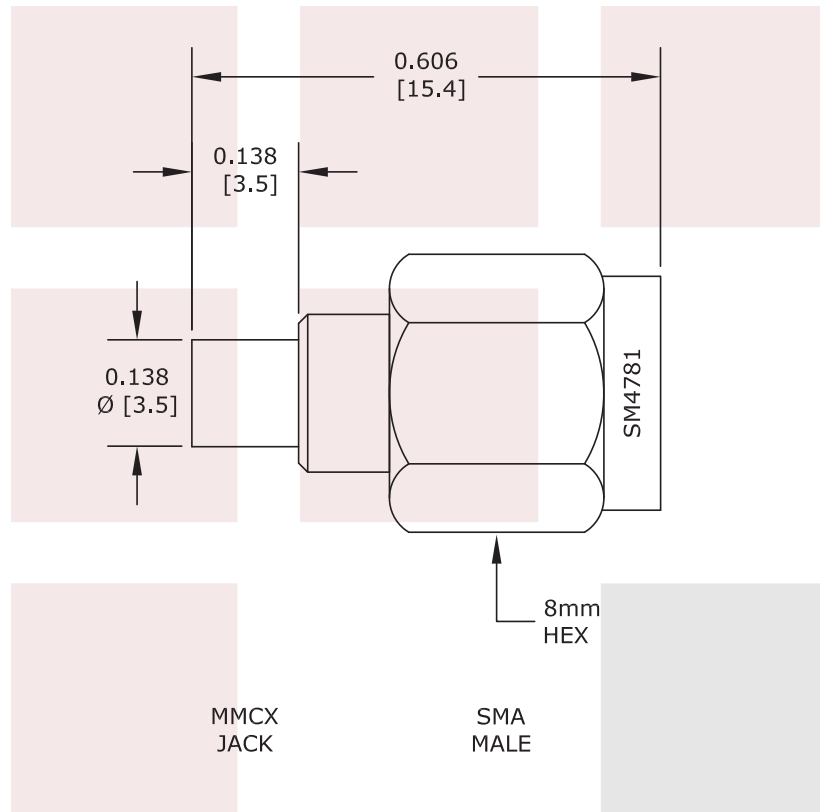

**STANDARD TOLERANCES**

- .X ±0.2
- .XX ±0.1
- .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<b>FAIRVIEW MICROWAVE INC.</b>		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		DWG NO <b>SM4781</b>		CAGE CODE <b>3FKR5</b>	
TITLE MMCX Jack to SMA Male Adapter		CAD FILE 122315	SHEET	SCALE N/A	SIZE A 150