

# SM4961 DATA SHEET

### **SMA Male to SMA Male Adapter**

SMA male to SMA male adapter part number SM4961 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA adapter has a male to male gender configuration and is built of durable stainless steel. SM4961 SMA male to SMA male adapter is gold plated and operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Max	Units		
Frequency Range	DC		18	GHz		
VSWR			1.2:1			

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

Size Length		0.875 in [22.23 mm]
Weight		0.015 lbs [6.8 g]
Description	Connector 1	Connector 2
Type	SMA Male	SMA Male

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Contact Captivation Method	Ероху	Ероху
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	8 to 10 in-lbs
	[0.90 to 1.13 Nm]	[0.90 to 1.13 Nm]



## **Configuration:**

- SMA Male Connector 1
- SMA Male Connector 2
- 50 Ohm
- Straight Body Geometry

### **Features:**

- VSWR of 1.2:1 max up to 18 GHz
- SMA interface meets MIL-STD-348
- Epoxy captivation
- Contact plating according to MIL-G-45204
- Gold Plated Contact

# **Applications:**

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

sales@fairviewmicrowave.com

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com





### **Material Specifications**

Description	Connector 1	Connector 2			
Туре	SMA Male	SMA Male			
Contact Material	Brass	Brass			
Contact Plating	Gold	Gold			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	PTFE	PTFE			
Body Material	Stainless Steel	Stainless Steel			
Body Plating	Gold	Gold			
Body Plating Spec.	MIL-G-45204	MIL-G-45204			

### **Environmental Specifications**

**Temperature** 

Operating Range


-55 to +115 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **Typical Performance Data**

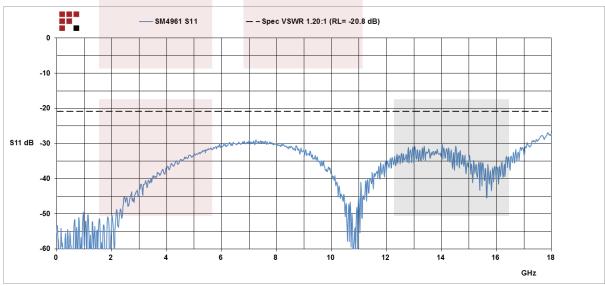





SMA Male to SMA Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: SMA Male to SMA Male Adapter SM4961

URL: https://www.fairviewmicrowave.com/sma-male-sma-male-adapter-sm4961-p.aspx

stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.		ient improv												
	stated, al	l specificati	ons are	nominal.	Fairvie	w Microwa	ve does n	ot make	any rep	resentat	ion or v	warranty re	gard	ling the
arising out of the use of any part or documentation.	suitability	of the part	t describ	ed hereir	for any	/ particulai	r purpose,	and Fair	view Mi	crowave	does n	ot assume	any	liability
	arising ou	t of the use	of any	part or do	cument	ation.								





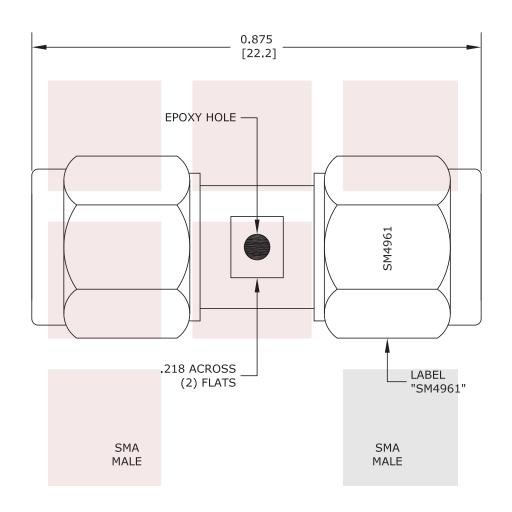

### STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
SMA Male to SMA Male Adapter	DWG NO SM4961			CAGE C	AGE CODE 3FKR5		
	CAD FILE 101316	SHEET	SCALE	N/A	SIZE A	41742	