

# SM5745 DATA SHEET

## **RA TNC Male to TNC Female Adapter**

RA TNC male to TNC female adapter part number SM5745 from Fairview Microwave is in-stock and ships same day. This Fairview TNC to TNC adapter has a male to female gender configuration. SM5745 TNC male to TNC female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum. This right angle TNC adapter allows for easier connections in tight spaces.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### **Electrical Specifications**

Description	Min	Тур	Max	Units	
Frequency Range	DC		6	GHz	
VSWR			1.25:1		

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

S	SIZE	4

Length Height	1.05 in [26.67 mm] 0.96 in [24.38 mm]
Weight	0.051 lbs [23.13 g]

Description	Connector 1	Connector 2	
Туре	TNC Male	TNC Female	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-STD-348	
Mating Cycles	500	500	



## **Configuration:**

- TNC Male Connector 1
- TNC Female Connector 2
- 50 Ohm
- Right Angle Body Geometry

## Features:

- VSWR of 1.25:1 max up to 6 GHz
- TNC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

# **Applications:**

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Material Specifications**


Description	Connector 1	Connector 2	
Туре	TNC Male	TNC Female	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Gold	Gold	
Contact Plating Spec.	pec. MIL-G-45204 MIL-		
Insulation Material	PTFE	PTFE	
Outer Contact Material		Brass	
Outer Contact Plating		Nickel	
Outer Conductor Contact Spe	C.	QQ-N-290	
Body Material	Brass		
Body Plating	Nickel		
Body Plating Spec.	QQ-N-290		

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

## **Typical Performance Data**

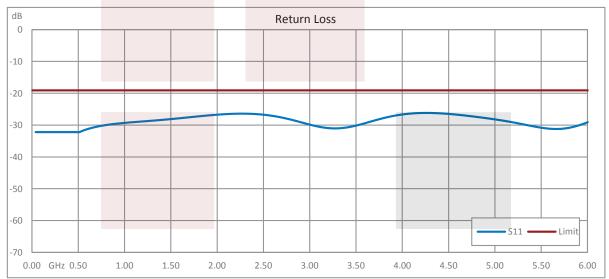





RA TNC Male to TNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: RA TNC Male to TNC Female Adapter SM5745

URL: https://www.fairviewmicrowave.com/ra-tnc-male-tnc-female-adapter-sm5745-p.aspx

				ave reserves the r					
				w Microwave does					
				y particular purpos	se, and Fair	view Mi	crowave do	es not assume a	ny liability
arising out	t of the use of	any part or do	cument	tation.					





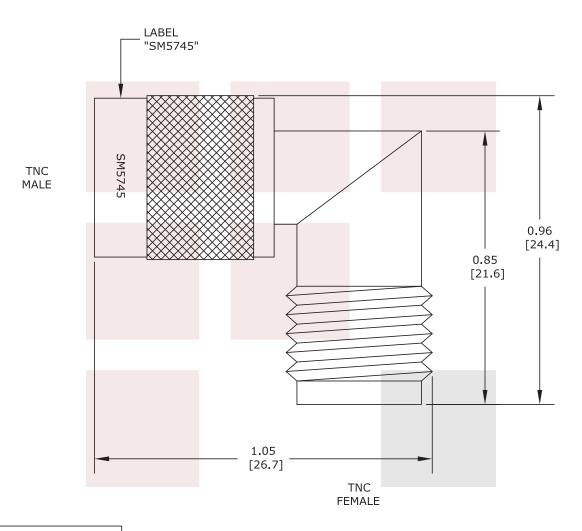

STANDARD TOLERANCES .X ±0.2 .XX ±0.1 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].						
RA TNC Male to TNC Female Adapter	DWG NO	SM5745			CAGE CODE 3FKR5		
	CAD FILE 101316	SHEET	SCAL	E N/A	SIZE A	41742	