

## BNC Triax Jack to BNC Triax Jack Adapter 3 Lug

BNC Triax jack to BNC Triax jack adapter part number SM6726 from Fairview Microwave is in-stock and ships same day. This Fairview BNC Triax to BNC Triax adapter has a jack to jack gender configuration. SM6726 BNC Triax jack to BNC Triax jack adapter operates to 3 GHz.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
Operating Voltage (AC)			500	Vrms
DWV (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms

Electrical Specification Notes:  
 Values at 25° C, sea level.

### Mechanical Specifications

<b>Size</b>	
Length	1.35 in [34.29 mm]
Width	0.45 in [11.43 mm]
Weight	0.03 lbs [13.61 g]

Description	Connector 1	Connector 2
Type	BNC Triax Jack	BNC Triax Jack
Polarity	Standard	Standard
Interface Specification	MIL-C-39012	MIL-C-39012

### Material Specifications

Description	Connector 1	Connector 2
Type	BNC Triax Jack	BNC Triax Jack
Contact Plating	Gold	Gold
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Outer Contact Material	Brass	Brass
Outer Contact Plating	Nickel	Nickel
Outer Contact Plating Spec.	QQ-N-290	QQ-N-290



### Configuration:

- BNC Triax Jack Connector 1
- BNC Triax Jack Connector 2
- Non-Constant Impedance
- Straight Body Geometry

### Features:

- BNC Triax interface meets MIL-C-39012
- Contact plating according to MIL-G-45204
- Gold Plated Contact

### Applications:

- General Purpose Test

Fairview Microwave  
 1130 Junction Dr. #100  
 Allen, TX 75013  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Environmental Specifications**

**Temperature**

Operating Range -65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

BNC Triax Jack to BNC Triax Jack Adapter 3 Lug from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [BNC Triax Jack to BNC Triax Jack Adapter 3 Lug SM6726](#)

URL: <https://www.fairviewmicrowave.com/bnc-triax-female-bnc-triax-female-adapter-sm6726-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

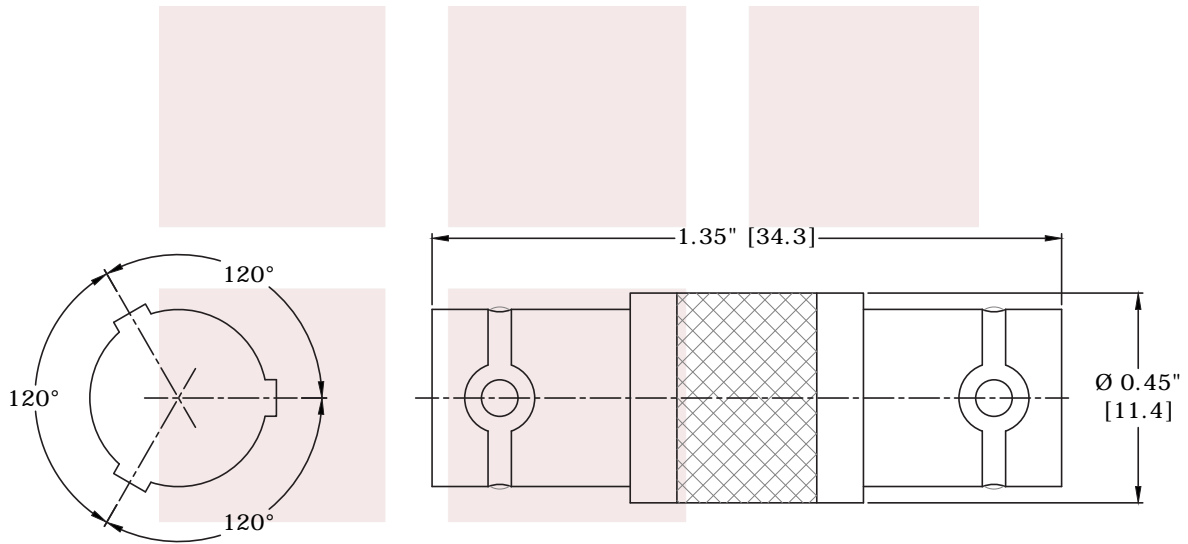

**JACK POLARITY**

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE BNC Triax Jack to BNC Triax Jack Adapter 3 Lug		DWG NO <b>SM6726</b>		CAGE CODE <b>3FKR5</b>	
CAD FILE	012016	SHEET	SCALE	N/A	SIZE A 5568