

**SPP-250-LLPL Low Loss Corrugated Coax Cable Blue FEP Jacket Superflexible**

**Times Microwave Systems Coax Cable Specification**

SPP-250-LLPL low loss plenum rated coax cable by Times Microwave is in-stock and ships same day. The SPP-250-LLPL coaxial cable features a low loss dielectric, solid copper center conductor and a helically corrugated, copper outer conductor. These features combine to make the Times Microwave SPP-250-LLPL an extremely flexible, low PIM coax cable, ideally suited for Small Cells, Distributed Antenna Systems (DAS) or other plenum installations. The tough jacket, made from an FEP fluoropolymer, provides moisture and UV protection.

A datasheet and specifications for Times Microwave SPP-250-LLPL coax cable, supplied by Fairview Microwave, are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave components allows designers to configure and customize their signal connections however they like. For providing low PIM jumper connections, low PIM feeder cables or connecting Small Cells, Fairview Microwave has the right cables for the job.



**Configuration:**

- Low Loss, Plenum Corrugated Cable

**Features:**

- UL910 Plenum Rated Cable
- PIM < -160 dBc
- Excellent Shielding >100 dB
- Lightweight and Extremely Flexible
- Low Loss
- UV Resistant Jacket

**Applications:**

- Small Cells
- Distributed Antenna Systems (DAS)
- Plenum Installations
- PIM Testing
- Multi-Carrier Communication Systems

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	DC		5.8	GHz
Impedance		50		Ohms
Velocity of Propagation		76		%
Shielding Effectiveness	100			dB
Passive Intermodulation			-160	dBc
Inner Conductor DC Resist.			3	Ohms/1000ft
Nominal Capacitance		29 [95.14]		pF/ft [pF/m]
Nominal Inductance		0.067 [0.22]		uH/ft [uH/m]

**Performance by Frequency Band**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	1.9	2.3	4.9	5.8	GHz
Attenuation, Typ	3.8 12.47	8.1 26.57	9 29.53	13.5 44.29	14.8 48.56	dB/100ft dB/100m
Power In (CW), Max	1,010	470	430	280	260	Watts

**Mechanical Specifications**

Diameter	0.28 in [7.11 mm]
Min. Bend Radius (Installation)	1.25 in [31.75 mm]
Bending Moment	0.8 lbs-ft [1.08 N-m]

**Construction Specifications**

Description	Material and Plating	Diameter
Inner Conductor	Copper, 1 Strands	0.068 in [1.73 mm]

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

Conductor Type	Solid	
Dielectric	PTFE	0.19 in [4.83 mm]
Outer Conductor	Copper Corrugated	0.25 in [6.35 mm]
Jacket	FEP, Blue	0.28 in [7.11 mm]

**Environmental Specifications**

**Temperature**

Operating Range

-55 to +200 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

SPP-250-LLPL Low Loss Corrugated Coax Cable Blue FEP Jacket Superflexible from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [SPP-250-LLPL Low Loss Corrugated Coax Cable Blue FEP Jacket Superflexible SPP-250-LLPL](#)

URL: <https://www.fairviewmicrowave.com/spp250llpl-low-loss-corrugated-coax-cable-fep-jacket-spp-250-llpl-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

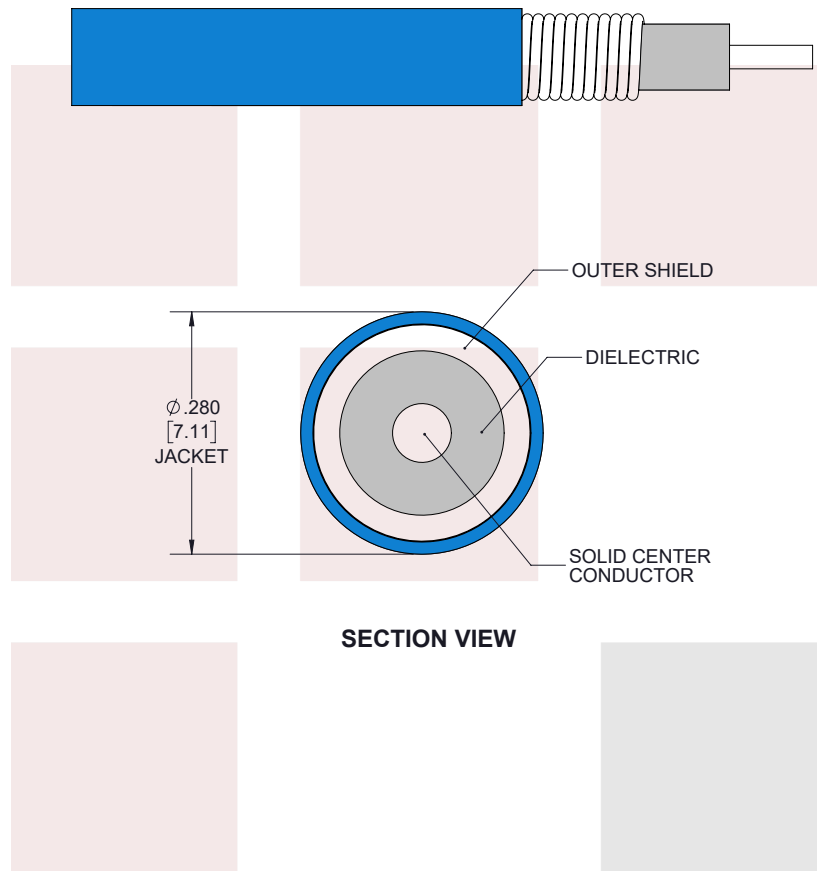

**SECTION VIEW**

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
TITLE SPP-250-LLPL Low Loss Corrugated Coax Cable Blue FEP Jacket Superflexible		DWG NO SPP-250-LLPL		CAGE CODE 3FKR5		
SECTION VIEW		CAD FILE	022118	SHEET	1 OF 1	SCALE N/A
				SIZE	A	7361