

TERMINATION 26.5GHZ SMA-M w CHAIN

ST2675

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-26.5 GHZ
 VSWR 1.3:1 MAX
 POWER (AVG) 2 WATT DERATES LINEARLY TO 10% @ 125C
 POWER (PEAK) 2500W/5 MICRO-S/.05% DS
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +125C


MECHANICAL:

MATERIAL BODY: STAINLESS STEEL
 ST2675 PASSIVATED
 ST2677 Au PLATING
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204
 INTERFACE MIL-STD-883
 INSULATOR: TEFLON
 CHAIN: PASS S STEEL

ROHS COMPLIANT

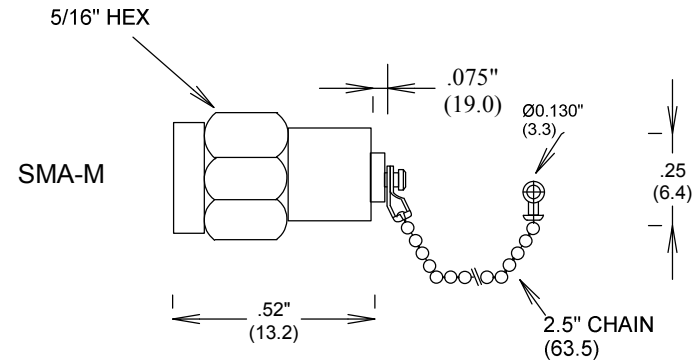

MEASUREMENTS BELOW ARE TYPICAL

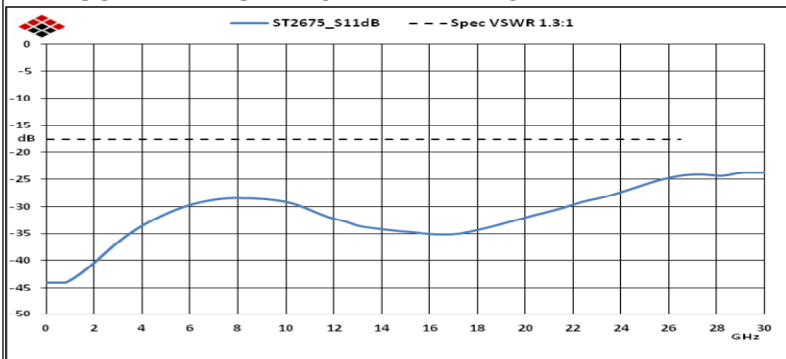

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TERMINATION 26.5GHZ SMA-M w CHAIN 2W

SIZE A	CAGE CODE 3FKR5	DWG NO ST2675	REV A
------------------	---------------------------	-------------------------	-----------------

SCALE

SHEET