

# FMCA2744-150CM DATA SHEET

## SMA Female to TNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax

The SMA female to TNC female bulkhead cable using RG223 coax, part number FMCA2744-150CM, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to TNC cable assembly has a female to female gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### **Electrical Specifications**

Description	Min	Тур	Max	Unit	s
Velocity of Propagation		66		%	
Capacitance		30.8 [ <mark>101.0</mark>	5]	pF/ft [pF	/m]

Mechanical	<b>Specifications</b>
mechanical	specifications

Cable Assembly Length*	59.06 in [150.01 cm]	
Weight	0.1746 lbs [79.2 g]	
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Material an Dielectric Type	RG223 50 Ohms Solid Copper, Silver PE	
Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter	2 Silver Plated Copper Braid Silver Plated Copper Braid PVC, Black 0.209 in [5.31 mm]	
Repeated Minimum Bend Ra	dius 1 in [25.4 mm]	



### **Configuration:**

- SMA Female
- TNC Female Bulkhead
- RG223

#### **Features:**

- 66% Phase Velocity
- Double Shielded
- PVC Jacket

## **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave

an INFINIT<sup>C</sup> brand



#### Connectors

Description	Connector 1	Connector 2		
Туре	SMA Female	TNC Female		
Mount Method		Bulkhead		
Specification	MIL-STD-348A			
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Beryllium Copper, Gold			
Contact Plating Spec.	50 µin minimum			
Dielectric Type	PTFE			
Body Material & Plating	Brass, Nickel	Brass, Nickel		
Body Plating Spec.	100 µin minimum			
lotted and Other Data Notes: ow to Order				
Part Number Configuration	ו: <b>FM</b>	CA2744 - xx	uu 	– cm = Centimeter
				<blank> = Inches - Length</blank>
	= 12 inches long cable			
	0cm = 100 cm long cable			

SMA Female to TNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Female to TNC Female Bulkhead Cable in 150 CM Length Using RG223 Coax FMCA2744-150CM


URL: https://www.fairviewmicrowave.com/sma-female-to-tnc-female-bulkhead-cable-rg223-coax-in-150-cm-fmca2744-150cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

an INFINIT® brand



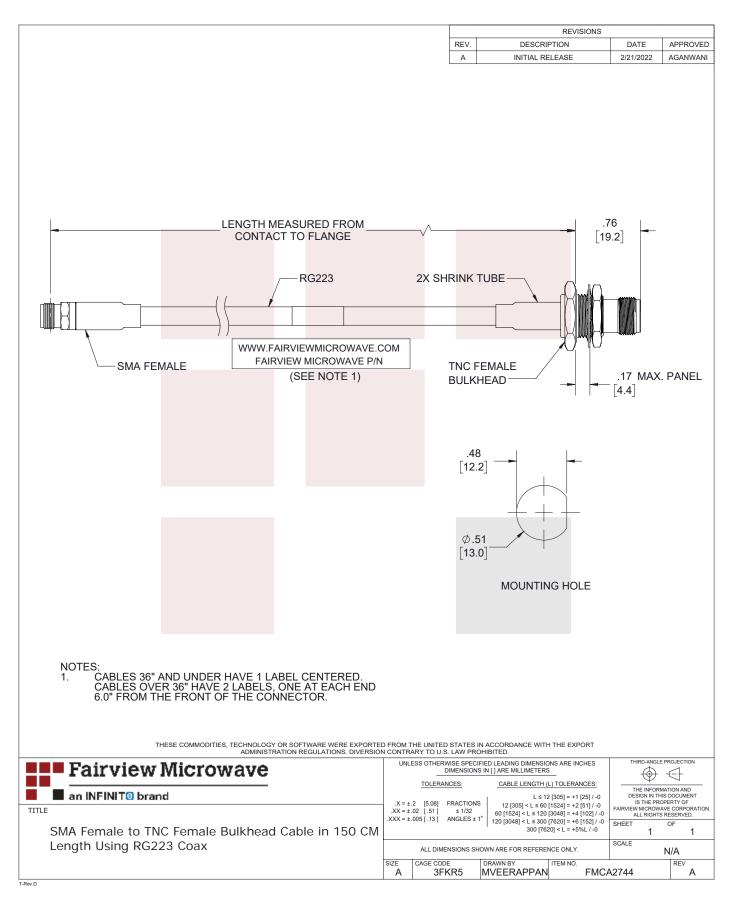

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689