



# 4.3-10 F/F In/Out Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, 40kA, Filter, Low PIM -173 dBc

RF surge protector (also known as lightning arrester) FMSP1051 from Fairview Microwave utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All Fairview Microwave RF surge protector products are available in stock with same day shipping.

| Surge Protector Type<br>DC Handling             | ns<br>Surge Filter<br>DC Block |     |       |       |  |
|---|--------------------------------|-----|-------|-------|--|
| Description                                     | Min                            | Тур | Max   | Unit  |  |
| Frequency Range                                 | 0.698                          |     | 2.7   | GHz   |  |
| Impedance                                       |                                | 50  |       | Ohm:  |  |
| VSWR  |                                |     | 1.1:1 |       |  |
| Return Loss                                     |                                |     | 26    | dB    |  |
| Insertion Loss                                  |                                |     | 0.1   | dB    |  |
| Passive Intermodulation                         |                                |     | -173  | dBc   |  |
| Input Power, CW<br>500W @ 920MHz<br>750W @ 50°C |                                |     | 500   | Watts |  |
| Surge Current                                   |                                |     | 40    | kA    |  |
| IEC 61000-4-5 8/20μs                            | WAVEFORM                       |     |       |       |  |
| Throughput Energy<br>FOR 3kA@ 8/20µs WA         | VEFORM                         |     | 500   | nJ    |  |

## Features:

- Surge current of 40kA
- Max Power 500W
- Frequency range from 698 MHz to 2.7 GHz
- Waterproof IP67 rated
- 4.3-10 female connectors
- DC Block
- Low PIM
- VSWR < 1.1:1
- · Low insertion loss
- · CE & RoHS compliant

### Applications:

- · Cellular communication systems
- Public safety systems
- Emergency response systems
- Industrial

#### **Mechanical Specifications**

Weight 0.595 lbs [269.89 g]

Configuration

Input Connector 4.3-10 Female Output Connector 4.3-10 Female

**Environmental Specifications** 

**Temperature** 

Operating Range -50 to +85 deg C

Ingress Protection (IP) Rating IP 67

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com





4.3-10 F/F In/Out Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, 40kA, Filter, Low PIM -173 dBc from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 4.3-10 F/F In/Out Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, 40kA, Filter, Low PIM -173 dBc FMSP1051


URL: https://www.fairviewmicrowave.com/4.3-10-surge-protector-2.7ghz-filter-fmsp1051-p.aspx







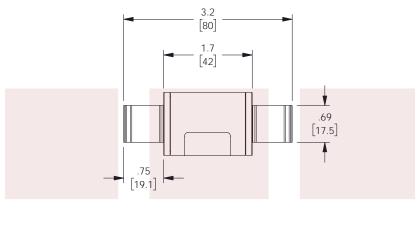

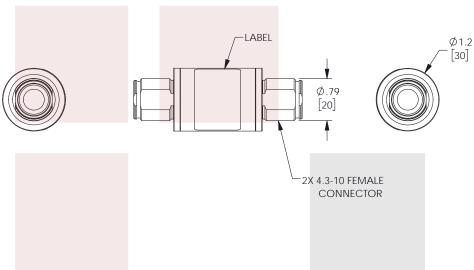

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES NOTE:

HARDWARE INCLUDED.

| Fairview Microwave!   | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. |              |      |                    |        |      |
|---|--|--------------|------|--------------------|--------|------|
| TITLE<br>I.3-10 F/F In/Out Bulkhead Coaxial RF Surge<br>Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67,<br>IOKA, Filter, Low PIM -173 dBc | DWG NO FMSP1051  |              |      | cage code<br>3FKR5 |        |      |
|   | CAD FILE 3/2/18  | SHEET 1 OF 1 | SCAL | E N/A              | SIZE A | NADF |