

10 dBi WR-430 Standard Gain Horn Radome Cover

FMWGCOV430-10 is a radome cover for 10 dBi WR-430 Standard Gain Horn antenna. This waveguide antenna radome cover is made from high strength, thermally stable Polymethacrylimide (PMI). PMI offers a low Relative Permittivity (Dielectric Constant) at the high frequency ranges seen with microwave and millimeter wave components. This allows for minimal signal loss or attenuation over other materials.

Increase your system capabilities with our PMI radome covers, designed to enhance the durability and longevity of standard gain horn antennas. Shielding against environmental elements, our radome covers ensure consistent signal integrity in any conditions. FMWGCOV430-10 has internal dimensions of 6.7 in by 5.4 in and will fit 10 dBi WR-430 standard gain horns. Fairview Microwave offers a wide selection of high performance waveguide components available in stock and same-day shipping to customers worldwide.

Mechanical Specifications

| | |
|---------------|--------------------------|
| Body Material | Polymethacrylimide (PMI) |
| Length | 6.947 in [176.45 mm] |
| Width | 5.646 in [143.41 mm] |
| Height | 0.276 in [7.01 mm] |
| Weight | 0.315 lbs [142.88 g] |

Mechanical Performance

| Typical Density (kg/m ³) | Compressive Strength (MPa) | Compression Modulus (MPa) | Tensile Strength (MPa) | Tensile Modulus (MPa) | Fracture Growth Rate(%) | Bending Strength (MPa) | Bending Modulus (MPa) | Deflection (MPa) |
|--------------------------------------|----------------------------|---------------------------|------------------------|-----------------------|-------------------------|------------------------|-----------------------|------------------|
| 200 | 8.5 | 317 | 7.5 | 410 | 2.4 | 13 | 449 | 22 |
| Standard Test | GB/T 8813-2008 | | GB/T9641-1988 | | | GB/T 8812.2-2007 | | |

Electrical Performance

| Antenna Radome Material | Frequency | | | | | | | |
|--------------------------------------|-----------|------|-----|------|------|------|------|------------|
| | 2 | 2.5 | 2.8 | 5 | 10 | 26 | 26.5 | Tolerance |
| ϵ_r (Relative Permittivity) | 1.08 | 1.09 | / | 1.14 | 1.14 | 1.14 | 1.12 | ± 0.01 |

Remarks:

1. Test method: GB/T - 5597 - 1999 "Test Method for Microwave Complex Permittivity of Solid Dielectric".
2. Sample size: diameter 51mm, thickness 5mm.
3. Sampling rate and data processing: 5 samples were tested for each material, each sample was tested on both sides, and a total of 80 samples were obtained for each material. data points, and take the average to obtain the final data.



Features:

- 10 dBi WR-430 Waveguide Standard Gain Horn
- Polymethacrylimide
- Low Relative Permittivity (Dielectric Constant)
- Minimal reflection or attenuation of signal

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


Compliance Certifications (see [product page](#) for current document)


10 dBi WR-430 Standard Gain Horn Radome Cover from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [10 dBi WR-430 Standard Gain Horn Radome Cover FMWGC0V430-10](#)

URL: <https://www.fairviewmicrowave.com/10-dbi-wr-430-standard-gain-horn-radome-cover-fmwgcov430-10-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

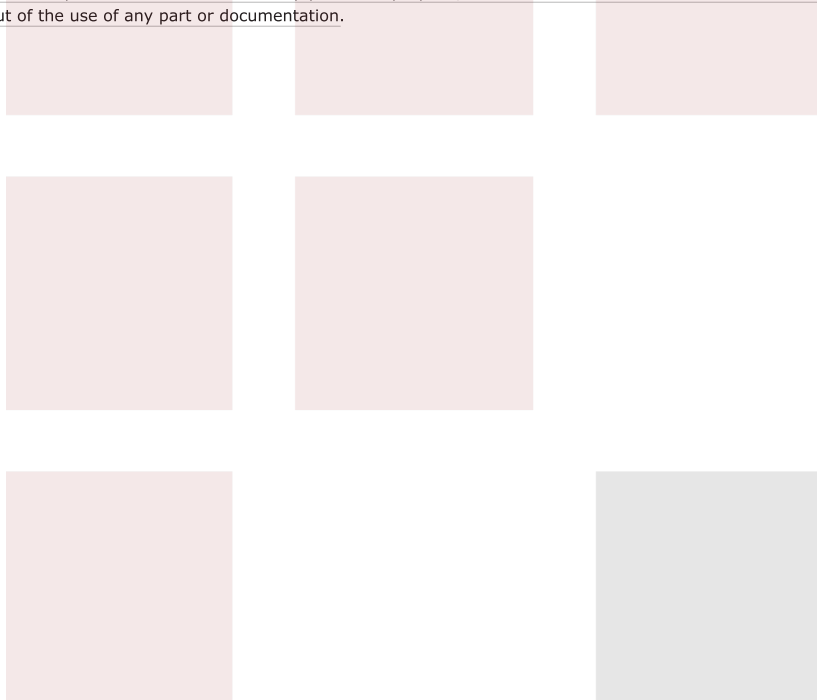

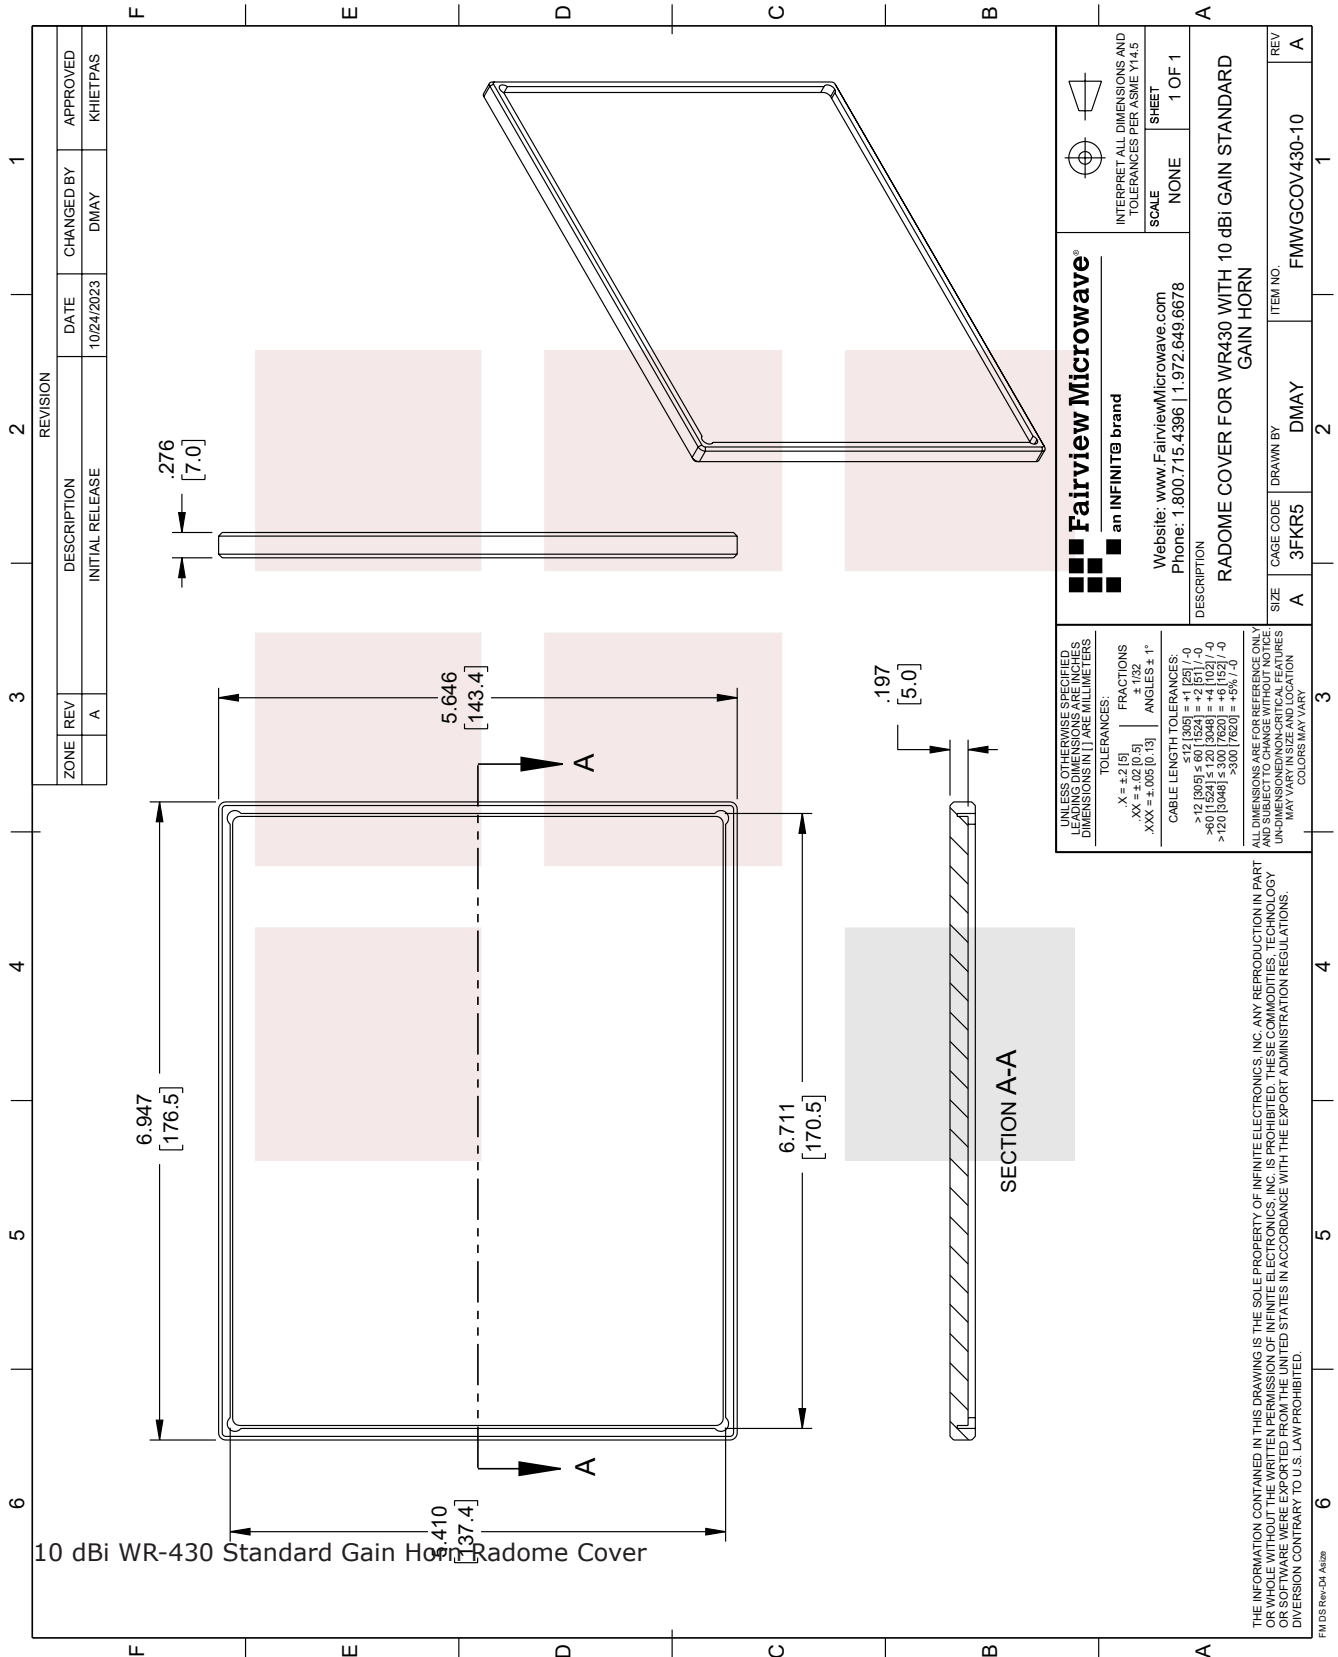

10 dBi WR-430 Standard Gain Horn Radome Cover

| REVISION | | DATE | CHANGED BY | APPROVED |
|----------|-----|-------------|-----------------|----------|
| ZONE | REV | DESCRIPTION | INITIAL RELEASE | |
| | A | | | |

| | | | |
|--|-----------|---|---------------|
| <p>Fairview Microwave[®] an INFINIT[®] brand</p> <p>Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678</p> | | <p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE NONE</p> <p>SHEET 1 OF 1</p> | |
| <p>DESCRIPTION RADOME COVER FOR WR430 WITH 10 dBI GAIN STANDARD GAIN HORN</p> | | | |
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. |
| A | 3FKR5 | DMAY | FMWGC0V430-10 |
| REV | | | REV |
| A | | | A |

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5] FRACTIONS ± 1/32
 .XX = ±.02 [0.5] ANGLES ± 1°
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
 ≤ 12 [305] ± .1 [25] / -0
 ≤ 60 [1524] ± .2 [51] / -0
 ≤ 90 [2286] ± .3 [76.2] / -0
 ≤ 120 [3048] ± .3 [76.2] / -0
 > 300 [7620] ± .5 [127] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED CRITICAL FEATURES MAY VARY. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.