

SM4262 DATA SHEET

Precision SMA Male to N Female Adapter

Precision SMA male to type N female adapter part number SM4262 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N adapter has a male to female gender configuration in a precision design. SM4262 SMA male to type N female adapter operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.12:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.12:1	
DWV (AC)			500	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size
Length
Width
\Meiaht

1.27 in [32.26 mm] 0.63 in [16 mm] 0.05776 lbs [26.2 q]

DescriptionConnector 1Connector 2TypeSMA MaleN FemalePolarityStandardStandardInterface SpecificationMIL-STD-348MIL-STD-348Hex Size5/16 inch

Material Specifications

Description	Connector 1	Connector 2		
Туре	SMA Male	N Female		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	PTFE		
Outer Contact Material		Passivated Stainless Steel		
Body Material	Passivated Stainless Steel			



Configuration:

- SMA Male Connector 1
- N Female Connector 2
- 50 Ohm
- Precision Design
- Straight Body Geometry

Features:

- VSWR of 1.12:1 max up to 18 GHz
- SMA interface meets MIL-STD-348
- Type N interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test
- Precision Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Precision SMA Male to N Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Precision SMA Male to N Female Adapter SM4262

URL: https://www.fairviewmicrowave.com/sma-male-n-female-adapter-sm4262-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 1.1 Page 2 of 3





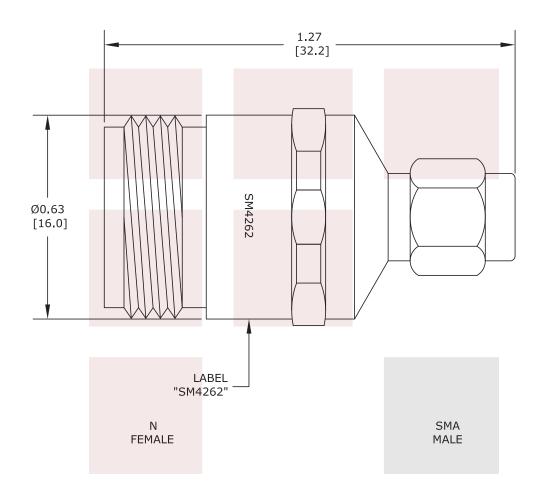

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1

.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Precision SMA Male to N Female Adapter	DWG NO SM4262		CAGE CODE 3FKR5			
	CAD FILE 101416	SHEET	SCALE	E N/A	SIZE A	41742