

Analog Phase Shifter, 4 GHz to 8 GHz, 180 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA

The FM82P2003 is an Analog Phase Shifter module that operates across a broadband frequency from 4 GHz to 8 GHz and supports a single positive voltage control of 0 to +10 Vdc. The design offers a continuously variable monotonic phase shift response that ranges from 0° to 180° while maintaining consistent insertion loss versus phase shift characteristics. The 50 Ohm design exhibits impressive typical performance which includes 5.5 dB insertion loss, +/-15° phase flatness, a 0.1 dB compression point (P0.1dB) of +25 dBm, and a maximum RF input power level of +27 dBm. The low profile pin package is aluminum with gold plating and supports field replaceable SMA RF connectors and solder pins for DC control. With the connectors removed, the package can be drop mounted onto a PWB. The module has an operational temperature range from -40°C to +85°C and is guaranteed to meet a series of environmental test conditions for Altitude, Vibration, Humidity, and Shock.


Features:

- Analog Phase Shifter
- 4 GHz to 8 GHz
- Phase Shift 0° to 360° typ
- Insertion Loss 5.5 dB typ
- Phase Flatness +/- 15° typ
- P0.1dB +25 dBm typ
- Maximum RF Input Power +27 dBm
- 50 Ohm Design
- Single Positive Voltage Control 0 to +10Vdc
- Solder Pins for DC Control Voltage and Ground
- Field Replaceable Female SMA RF Connectors
- Operational Temperature Range -40°C to +85°C
- Rugged and Compact Aluminum Gold Plated Package Design
- Guaranteed Environmental Test Conditions Altitude, Vibration, Humidity, Shock
- Single DC Control Operation
- Low Phase Error

Electrical Specifications (Values at +25° C, Sea Level)

Description	Min	Typ	Max	Units
Frequency Range	4		8	GHz
Impedance		50		Ohms
Phase Shift		180		Degrees
Phase Adjustment			180	Deg/ GHz
Control Voltage	0	10		Volts
Input VSWR		2:1	2.5:1	
Output VSWR				
Insertion Loss*		5.5	6	dB
Phase Flatness		±8	±15	Degrees
IL Temperature Coefficient		0.11		dB/deg C
0.1 dB Compression Power		25		dBm
DC Current		5		mA
Input Power, CW			27	dBm

*at 0V DC Control

Applications:

- Test & Measurement
- Military & Commercial Communications

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Absolute Maximum Rating

Parameter	Rating
Control Voltage	0V to +15V
RF Input power	+27dBm



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Mechanical Specifications
Size

Length	0.787 in [19.99 mm]
Width/Diameter	0.551 in [14 mm]
Height	0.374 in [9.5 mm]
Weight	0.02 lbs [9.07 g]
Body Material and Plating	Aluminum, Gold

Configuration

Input Connector	SMA Female
Input Connector Spec.	Field Replaceable
Output Connector	SMA Female
Output Connector Spec.	Field Replaceable

Environmental Specifications
Temperature

Operating Range	-40 to 85 deg C
Storage Range	-50 to 105 deg C

Humidity	100% RH at 35°C, 95% RH at 40°C
Shock	20G for 11 msec half sine wave, 3 axis both directions
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 Feet


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Typical Performance Data


Insertion Loss @ +25°C

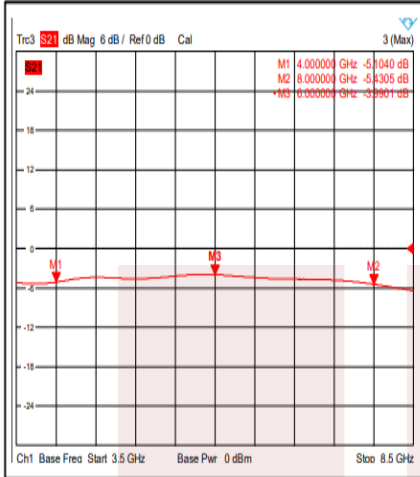


Input VSWR @ +25°C

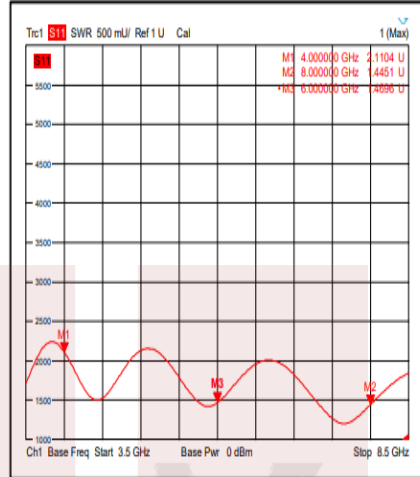


Output VSWR @ +25°C

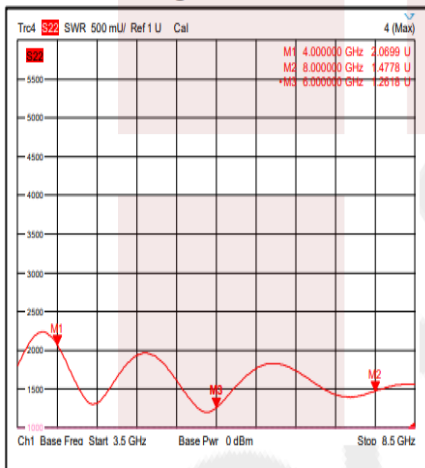


Insertion Loss @ -40°C

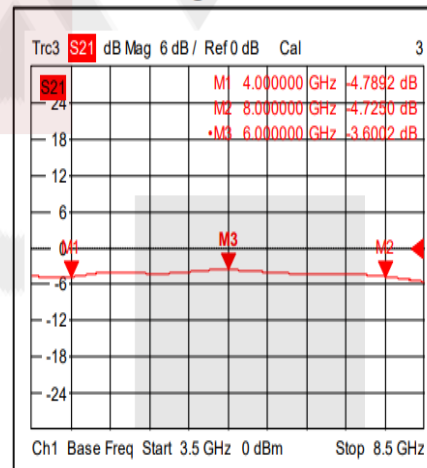


Input VSWR @ -40°C

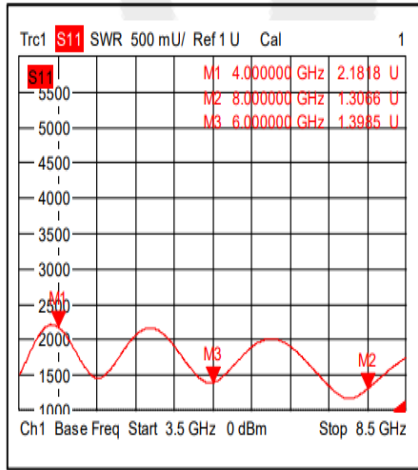


Output VSWR @ -40°C

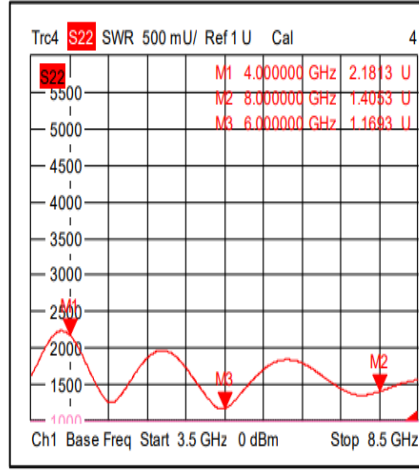


Insertion Loss @ +85°C

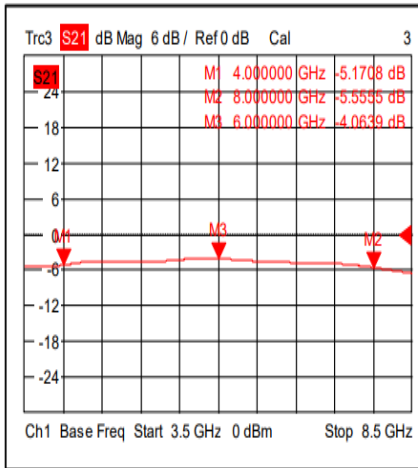


Input VSWR @ +85°C

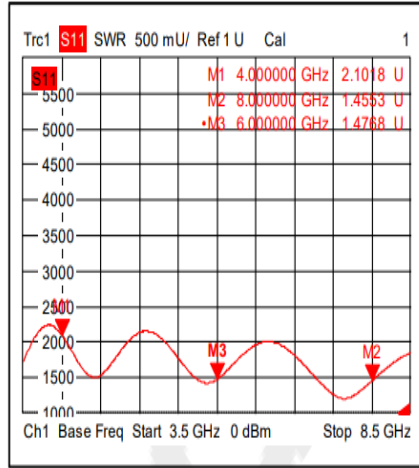

Output VSWR @ +85°C

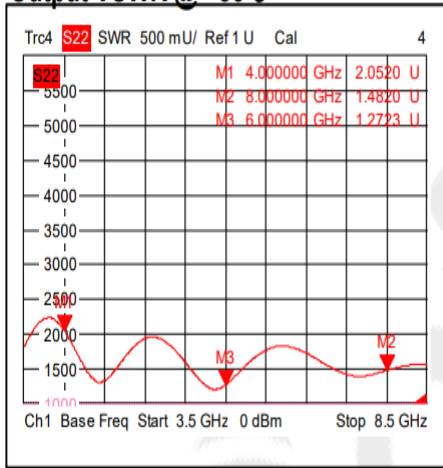


Insertion Loss vs. Frequency

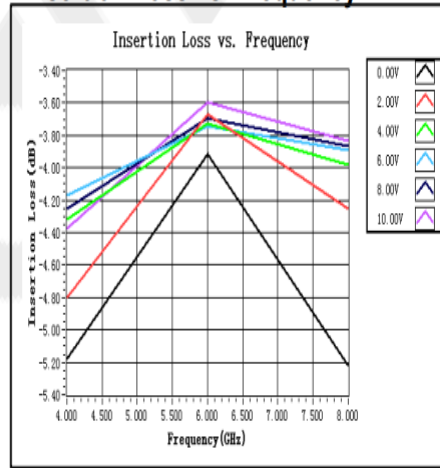


Input VSWR vs. Voltage




Output VSWR vs. Voltage

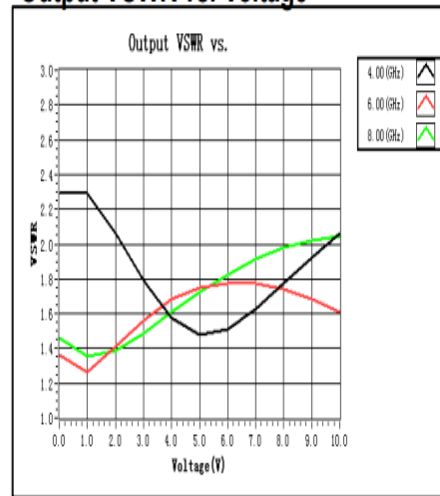


Phase Shift vs. Frequency

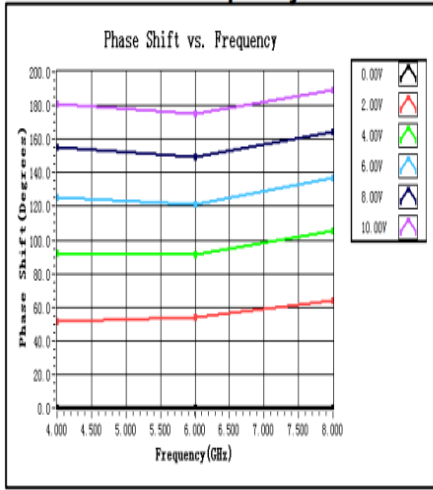

Phase Shift vs. Voltage

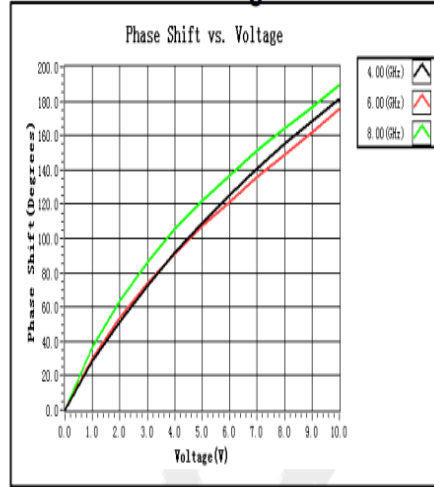

Attenuation vs. Frequency

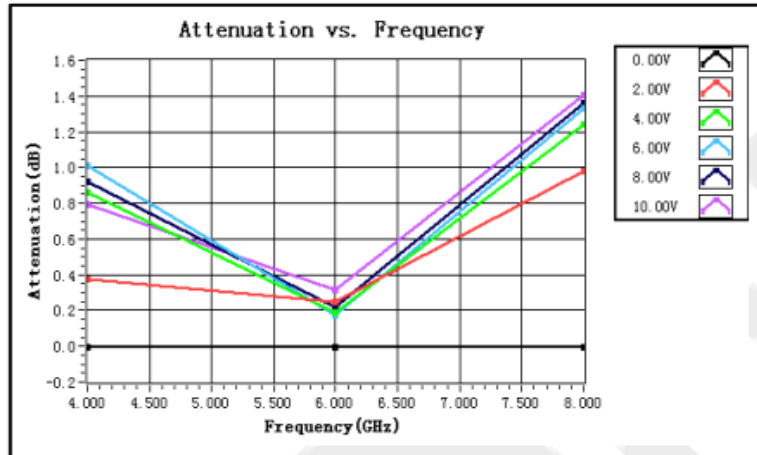


Analog Phase Shifter, 4 GHz to 8 GHz, 180 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Analog Phase Shifter, 4 GHz to 8 GHz, 180 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA FM82P2003](#)

URL: <https://www.fairviewmicrowave.com/sma-analog-phase-shifter-4-8-ghz-fm82p2003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

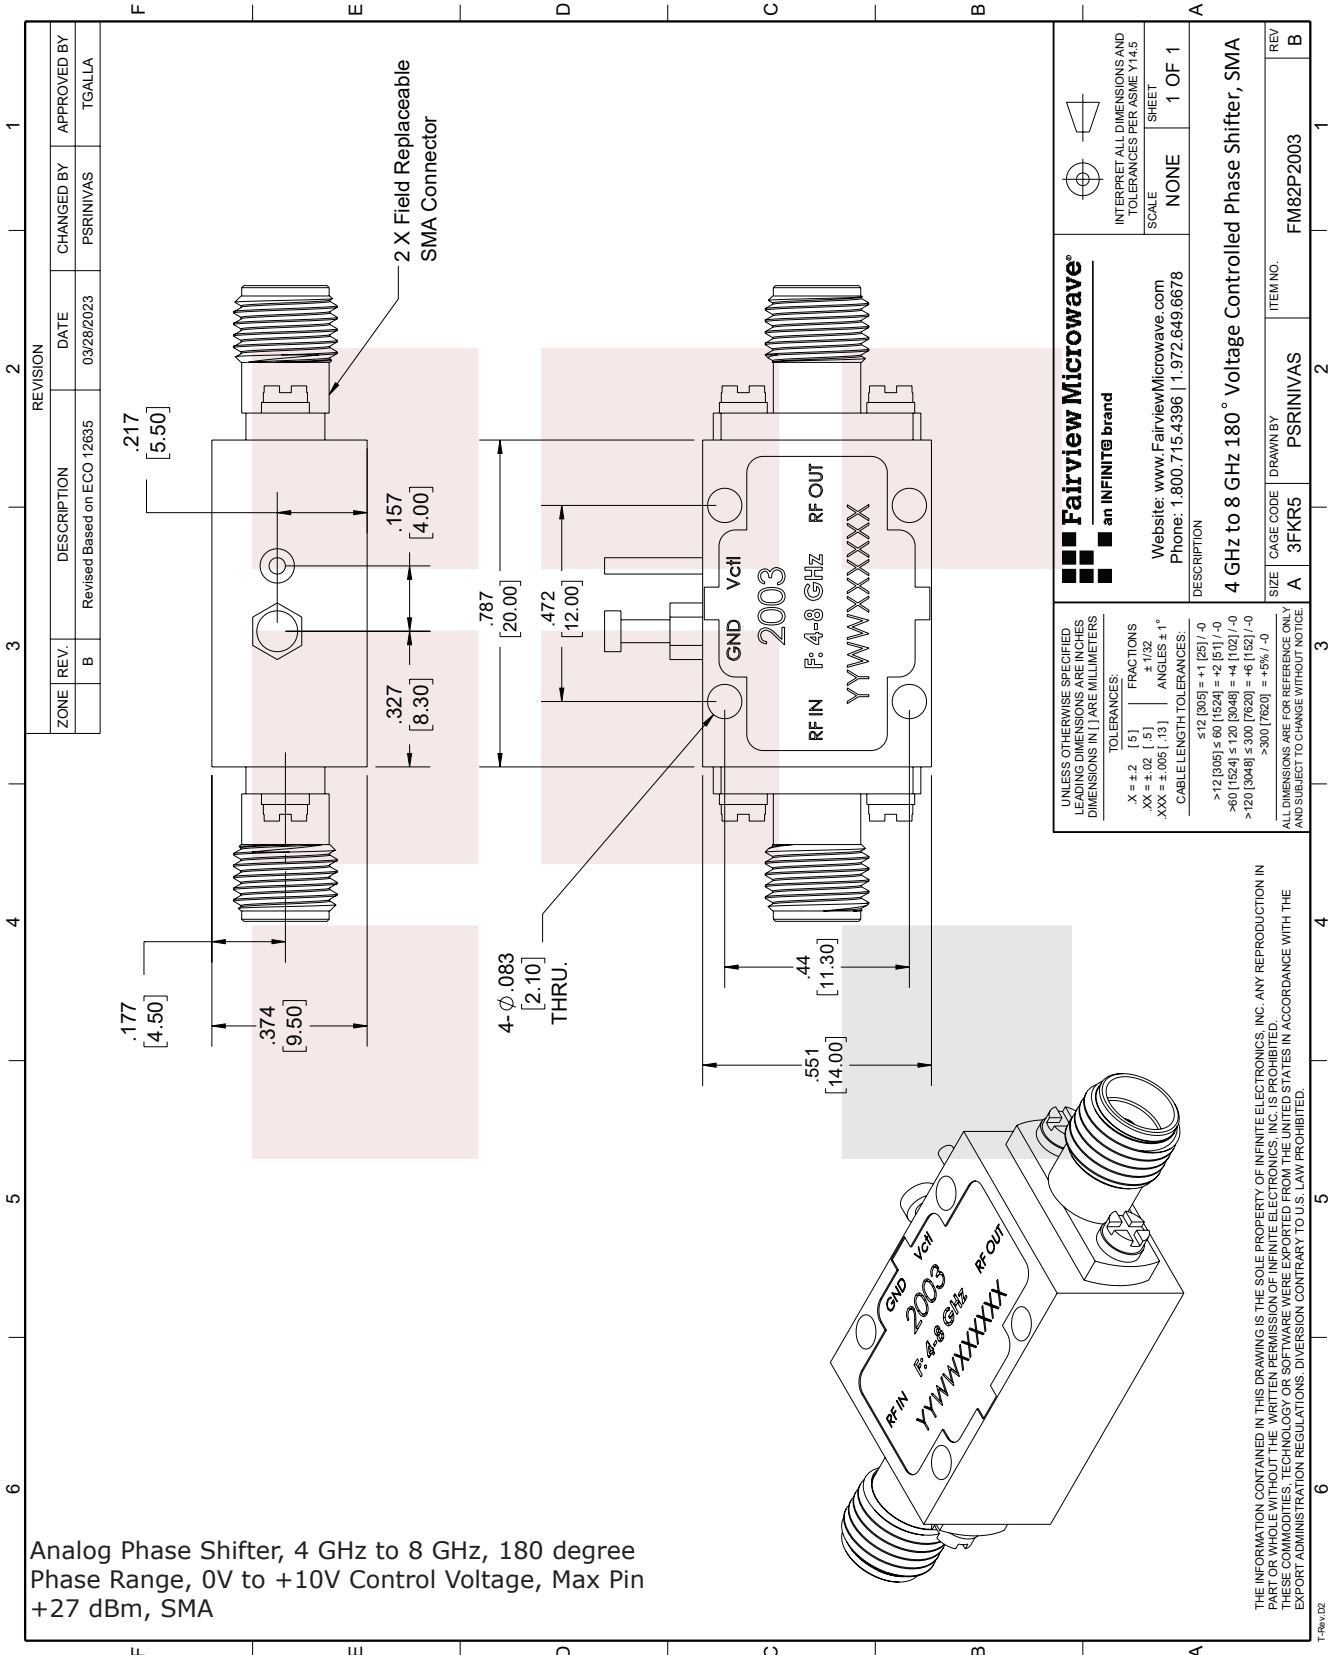

Analog Phase Shifter, 4 GHz to 8 GHz, 180 degree Phase Range, 0V to +10V Control Voltage, Max Pin +27 dBm, SMA

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THIS DRAWING IS THE PROPERTY OF INFINITE ELECTRONICS, INC. AND IS TO BE USED ONLY IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.