an INFINIT<sup>©</sup> brand

# FMAD1175 DATA SHEET

# Low PIM 4.3-10 Female to N Female Adapter

4.3-10 female to type N female adapter part number FMAD1175 from Fairview Microwave is in-stock and ships same day. This Fairview 4.3-10 to type N adapter has a female to female gender configuration in a low PIM design. FMAD1175 4.3-10 female to type N female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Мах	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation			-160	dBc

Electrical Specification Notes: Values at 25° C, sea level.

### **Mechanical Specifications**

Description	Connector 1	Connector 2
Туре	4.3-10 Female	N Female
Polarity	Standard	Standard
Mating Cycles	500	500

### **Material Specifications**

Description	Connector 1	Connector 2	
Туре	4.3-10 Female	N Female	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Silver	Silver	
Insulation Material	PTFE	PTFE	
Outer Contact Material	Bronze	Bronze	
Outer Contact Plating	Tri-Metal	Tri-Metal	
Body Material	Brass	Brass	
Body Plating	Tri-Metal	Tri-Metal	

### **Environmental Specifications**

**Temperature** Operating Range

-40 to +155 deg C



### **Configuration:**

- 4.3-10 Female Connector 1
- N Female Connector 2
- 50 Ohm
- Low PIM Design
- Straight Body Geometry

### **Features:**

- VSWR of 1.25:1 max up to 6 GHz
- PIM levels better than -160 dBc
- Silver Plated Beryllium Copper Contact

## **Applications:**

- Enables Between Series
  Connections
- General Purpose Test
- Low PIM Applications
- Mobile Communications Systems
- Base Stations
- Distributed Antenna Systems (DAS)
- Small Cells
- Feeder Cables

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**


Notes:

Low PIM 4.3-10 Female to N Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Low PIM 4.3-10 Female to N Female Adapter FMAD1175


URL: https://www.fairviewmicrowave.com/low-pim-4.3-10-female-n-female-adapter-fmad1175-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.







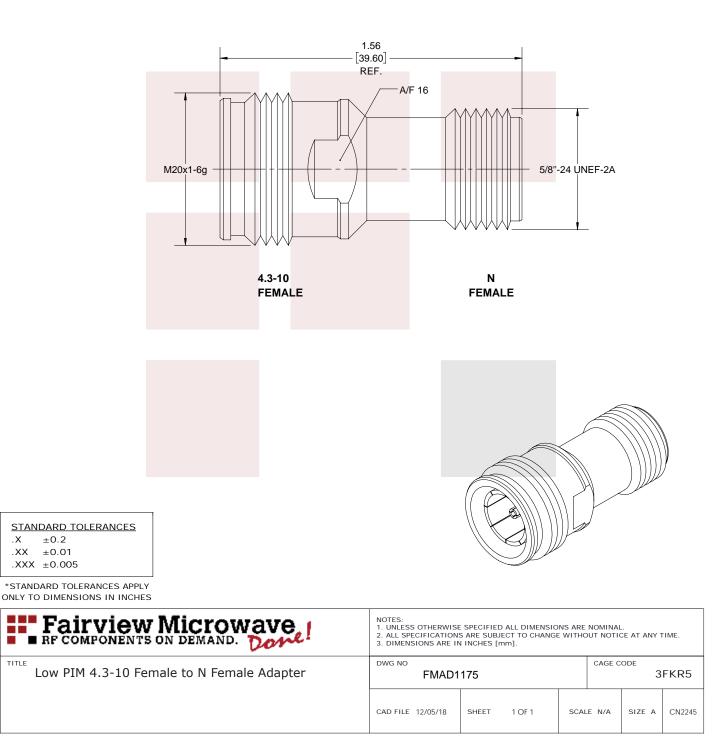

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689