



20 GHz to 40 GHz, 60 dB Gain Broadband High Gain Amplifier with 10 dBm and 2.92mm

FMAM3502 is a Portable Amplifier that operates over the 20.0 to 40.0 GHz Frequency Range. The amplifier has a typical gain of 60 dB and a P1dB of \pm 10 dBm minimum. The amplifier has an On/Off switch that is located on the Front Panel. Input/Output Connectors are 2.92mm. The amplifier comes with a fuse and a 6 foot power cord.



Description Min		Тур	Max	Unit	
Frequency Range	20		40	GHz	
Gain		60		dB	
Gain Flatness			±3	dB	
P1dB	+10			dBm	
Noise Figure		5		dB	
(Only Measured to 26.5 GHz)					
Input VSWR			2:1		
Output VSWP			2 · 1		

Input VSWR				2:1	
Output VSWR				2:1	
Operating AC Voltage (Supplied with a fuse and 6	5 foot power cor	d)	11!	5, 60 Hz	VAC
Operating Temperature I	Range (OTR)	-40		+85	°C

Mechanical Specifications

Size	
Length	4.92 in [124.97 mm]
Width	4.92 in [124.97 mm]
Height	2.26 in [57.4 mm]
Input Connector Output Connector	2.92mm Female 2.92mm Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-40 to +100 deg C

Humidity	MIL-STD-202F, Method 103B COND. B
Shock	MIL-STD-202F, Method 213B COND. B
Vibration	MIL-STD-202F, Method 204D COND. B
Altitude	MIL-STD-202F, Method 105C COND. B
Temperature Cycle	MIL-STD-202F, Method 107D COND. A

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

REACH Compliant 12/17/2015



Features:

- 20.0 to 40.0 GHz Frequency Range
- Gain of 60 dB typ
- On/Off Switch on Front Panel
- Gain Flatness of ±3.0 dB max
- P1dB of +10 dBm
- Input/Output Connectors 2.92mm Female.

Applications:

- Test and Measurement
- General Purpose Broadband High Gain Amplifier
- Lab Test Amplifier
- Portable Broadband Amplifier

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Plotted and Other Data


Notes:

- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.




Typical Performance Data

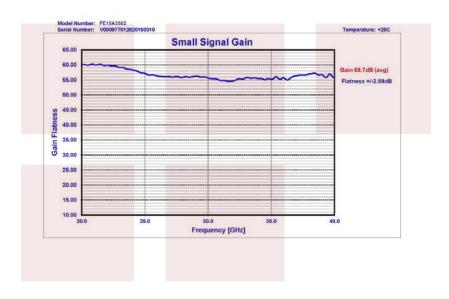

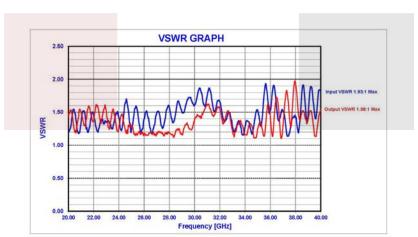






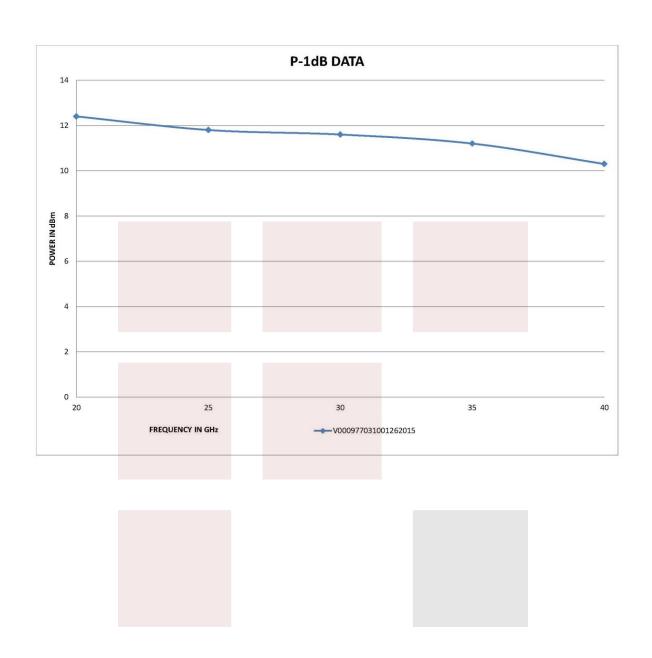





NOISE FIGURE IN dB

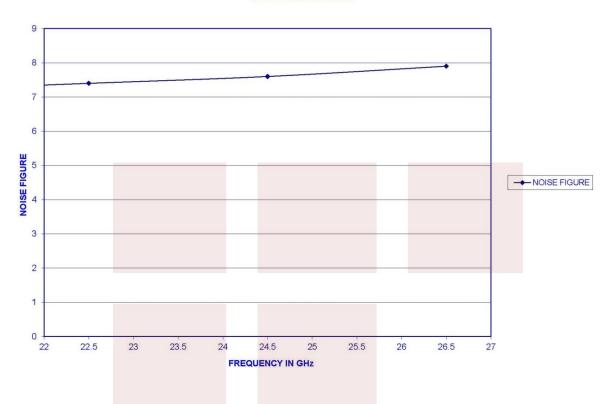

20 GHz to 40 GHz, 60 dB Gain Broadband High Gain Amplifier with 10 dBm and 2.92mm from Fairview Microwave is instock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 20 GHz to 40 GHz, 60 dB Gain Broadband High Gain Amplifier with 10 dBm and 2.92mm FMAM3502

URL: http://www.fairviewmicrowave.com/20-40-ghz-broadband-high-gain-amplifier-fmam3502-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





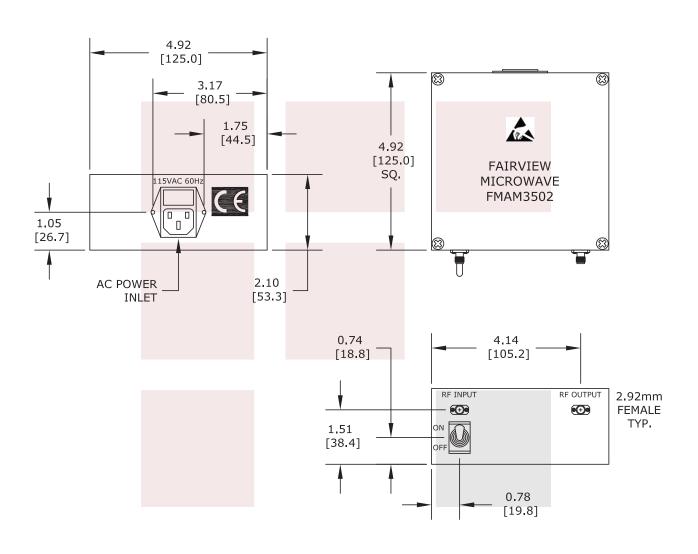

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
20 GHz to 40 GHz, 60 dB Gain Broadband High Gain	DWG NO FMAM3502			CAGE CODE 3FKR5		
Amplifier with 10 dBm and 2.92mm	CAD FILE 020516	SHEET	SCALI	E N/A	SIZE A	2233