

Power and Control Cable for RF Bi-Directional Amplifier FM15B5003

Fairview Microwave's FMAMJ000 is a cable assembly designed to be used with Bi-Directional Amplifier model FM15B5003. The cable assembly offers a 12 inch cable length with a Female DC Socket connector on one end and tinned solder pins on the other end. The FMAMJ000 cable assembly is sold separately.

Mechanical Specifications

Size

Length

12 in [304.8 mm]

Weight

0.0203 lbs [9.21 g]

Power and Control Cable for RF Bi-Directional Amplifier FM15B5003 from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Power and Control Cable for RF Bi-Directional Amplifier FM15B5003 FMAMJ000](#)

URL: <https://www.fairviewmicrowave.com/power-and-control-cable-for-rf-bi-directional-amplifier-fm15b5003-fmamj000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.




Features:

- 12 inch Length
- 8-Pin Female DC Socket Connector
- Tinned Soldering Pins
- Designed for FM15B5003 Bi-Directional Amplifier

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

AMPLIFIER DC SOCKET CABLE ASSEMBLY			
PIN	HEAT SHRINK LABEL	WIRE TYPE / COLOR	L= WIRE LENGTH
1	TEMP	24-26 AWG ORANGE	12"
2,4,6	GND	24-26 AWG BLACK	12"
3	Tx/Rx	24-26 AWG BLUE	12"
5,7	+VDC	24-26 AWG RED	12"
8	SGND	24-26 AWG BLACK	12"

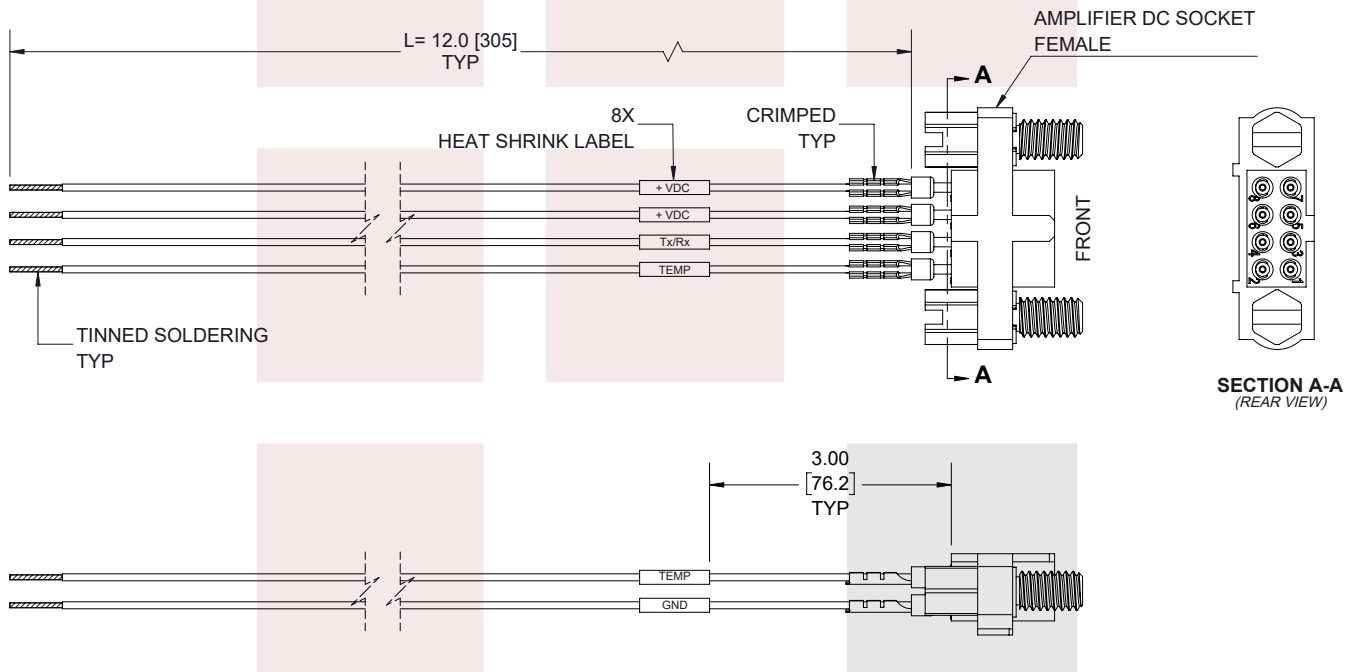

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p>Fairview Microwave an INFINIT[®] brand</p>		<p>NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].</p>	
<p>TITLE Power and Control Cable for RF Bi-Directional Amplifier FM15B5003</p>		<p>DWG NO FMAMJ000</p>	<p>CAGE CODE 3FKR5</p>
<p>CAD FILE 07/30/19</p>	<p>SHEET 1 OF 1</p>	<p>SCALE N/A</p>	<p>SIZE A 7361</p>