

6 dB Fixed Attenuator 3.5mm Male (Plug) to 3.5mm Female (Jack) up to 26.5 GHz Rated to 2 Watts, Aluminum Body, 1.45:1 VSWR



FMAT7471-6

Features

- DC to 26.5 GHz Range
- Attenuation 6 + 1.0 dB
- 2 Watts Average Input Power
- VSWR <1.45:1
- Functional up to 33 GHz

Applications

- Precision Measurements
- Production Systems
- Instrumentation
- Prototyping and Characterization

Description

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (attenuate) a known amount. These attenuators pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The FMAT7471-6 is a 6 dB Fixed Attenuators that operates from DC to 26.5 GHz and is rated to 2 Watts. The versatile coaxial package uses 3.5mm male to 3.5mm female connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
Impedance		50		Ohms
Nominal Attenuation		6		dB
VSWR			1.45:1	
Input Power, CW			2	Watts
Derated linearly to 0.5W @ 125°C				
Input Power, Peak			500	Watts
5μs pulse, 0.4% duty cycle				

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 26.5					GHz
Attenuation Accuracy, Typ	1					dB

Mechanical Specifications

Size

Length	1.437 in [36.5 mm]
Width/Diameter	0.394 in [10.01 mm]
Weight	0.01764 lbs [8 g]
Body Material and Plating	Aluminum

6 dB Fixed Attenuator 3.5mm Male (Plug) to 3.5mm Female (Jack) up to 26.5 GHz Rated to 2 Watts, Aluminum Body, 1.45:1 VSWR



FMAT7471-6

Configuration		Design	
Design		Fixed	
Connectors			
Description		Connector 1	Connector 2
Type		3.5mm Male	3.5mm Female
Contact Material and Plating		Brass, Gold	Beryllium Copper, Gold
Body Material and Plating		Stainless Steel	Stainless Steel

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

6 dB Fixed Attenuator 3.5mm Male (Plug) to 3.5mm Female (Jack) up to 26.5 GHz Rated to 2 Watts, Aluminum Body, 1.45:1 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [6 dB Fixed Attenuator 3.5mm Male \(Plug\) to 3.5mm Female \(Jack\) up to 26.5 GHz Rated to 2 Watts, Aluminum Body, 1.45:1 VSWR FMAT7471-6](#)

URL: <https://www.fairviewmicrowave.com/6db-fixed-attenuator-3.5mm-male-3.5mm-female-2-watts-fmat7471-6-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMAT7471-6 CAD Drawing

6 dB Fixed Attenuator 3.5mm Male (Plug) to 3.5mm Female (Jack) up to 26.5 GHz Rated to 2 Watts, Aluminum Body, 1.45:1 VSWR

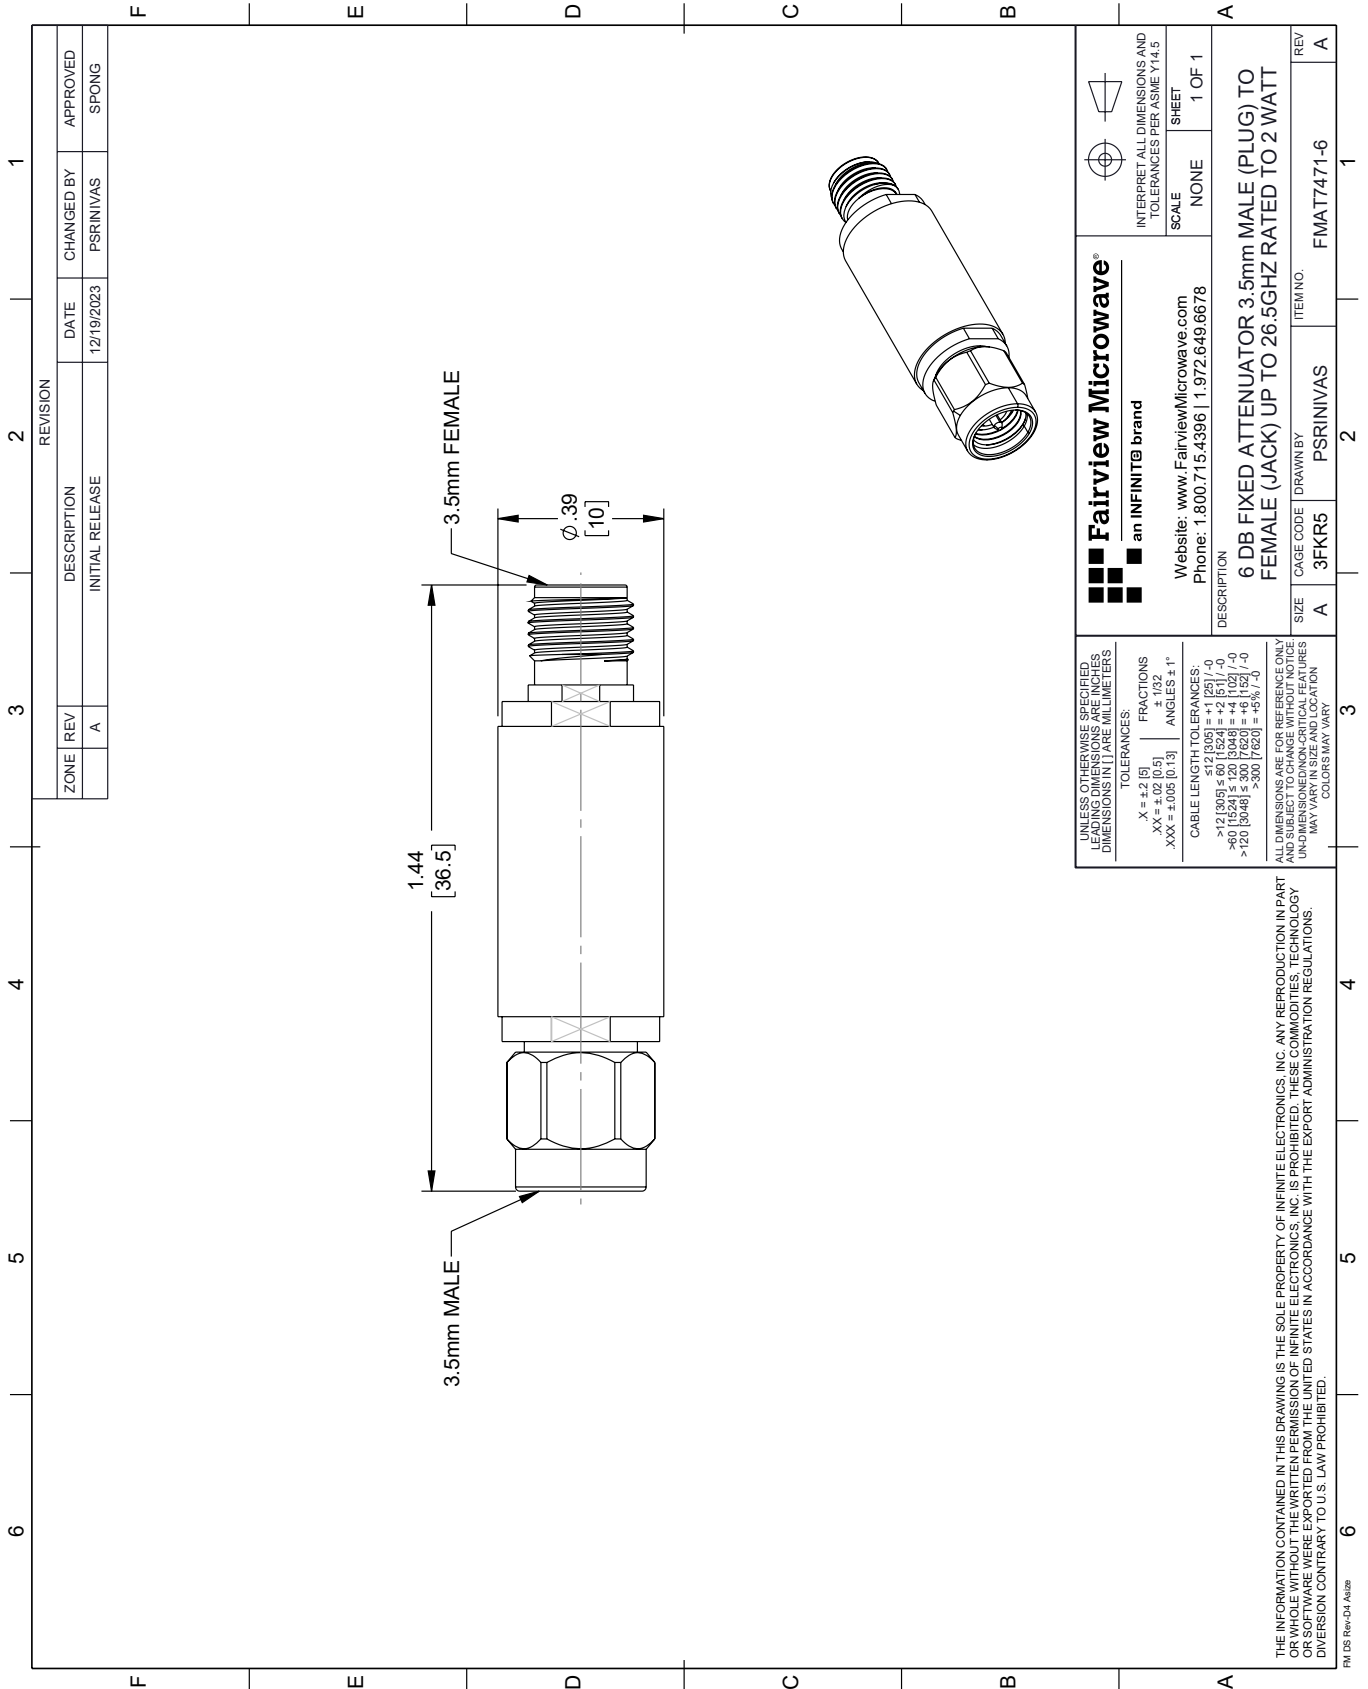

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV	DESCRIPTION	PSR/NIVAS	SPONG
	A	INITIAL RELEASE		

 Fairview Microwave® an INFINIT® brand Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE NONE SHEET 1 OF 1
DESCRIPTION 6 DB FIXED ATTENUATOR 3.5mm MALE (PLUG) TO FEMALE (JACK) UP TO 26.5GHZ RATED TO 2 WATT		
SIZE	CAGE CODE	ITEM NO.
A	3FKR5	PSR/NIVAS
DRAWN BY		REV
PSR/NIVAS		A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = +.2 [5] FRACTIONS ± 1/32
 .XX = ±.02 [0.5] ANGLES ± 1°
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
 <12 [305] ±.60 [15.24] = +.2 [5] / -0
 >12 [305] ≤.60 [15.24] = +.2 [5] / -0
 >60 [1524] ≤.120 [3048] = +.4 [10] / -0
 >120 [3048] ≤.300 [7620] = +.8 [20] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/UNCLEAR FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

FM 06 Rev-D4 Alt2b