

3 dB Fixed Attenuator NEX10 Male (Plug) to NEX10 Female (Jack) Up to 6 GHz Rated to 10 Watts, Aluminum Body, 1.25:1 VSWR



**FMAT7491-3**

**Features**

- DC to 6 GHz Range
- NEX10 Connectorized Design
- Attenuation 3 ±1 dB
- Max Power 10 Watts (CW)
- VSWR 1.25:1

**Applications**

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems
- 5G Cellular Bands
- DAS Systems

**Description**

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The FMAT7491-3 is a 3 dB Fixed Attenuator that operates from DC to 6 GHz and is rated to 10 Watts. The versatile coaxial package uses NEX10 male to NEX10 female connectors.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
Nominal Attenuation		3		dB
Attenuation Accuracy		1		dB
VSWR			1.25:1	
Input Power, CW			10	Watts
Input Power, Peak			100	Watts
20µs pulse, 8% duty cycle				

**Mechanical Specifications**

**Size**

- Length 2.244 in [57 mm]
- Width/Diameter 0.787 in [19.99 mm]
- Weight 0.1 lbs [45.36 g]
- Body Material and Plating Aluminum

**Configuration**

- Design Fixed, Bidirectional
- Design Type Standard
- Package Style Connectorized

3 dB Fixed Attenuator NEX10 Male (Plug) to NEX10 Female (Jack) Up to 6 GHz Rated to 10 Watts, Aluminum Body, 1.25:1 VSWR



## FMAT7491-3

### Connectors

Description	Connector 1	Connector 2
Type	NEX10 Male	NEX10 Female
Contact Material and Plating	Beryllium Copper, Silver	Beryllium Copper, Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

### Environmental Specifications

#### Temperature

Operating Range	-40 to +75 deg C
Storage Range	+85 to -50 deg C
Humidity	<95%
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6-Fc
Altitude	<5000m
Thermal Shock	IEC 60068-2-14-Na

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

### Typical Performance Data

3 dB Fixed Attenuator NEX10 Male (Plug) to NEX10 Female (Jack) Up to 6 GHz Rated to 10 Watts, Aluminum Body, 1.25:1 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [3 dB Fixed Attenuator NEX10 Male \(Plug\) to NEX10 Female \(Jack\) Up to 6 GHz Rated to 10 Watts, Aluminum Body, 1.25:1 VSWR FMAT7491-3](#)

URL: <https://www.fairviewmicrowave.com/3db-fixed-attenuator-nex10-male-nex10-female-10-watts-fmat7491-3-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMAT7491-3 CAD Drawing

3 dB Fixed Attenuator NEX10 Male (Plug) to NEX10 Female (Jack) Up to 6 GHz Rated to 10 Watts, Aluminum Body, 1.25:1 VSWR

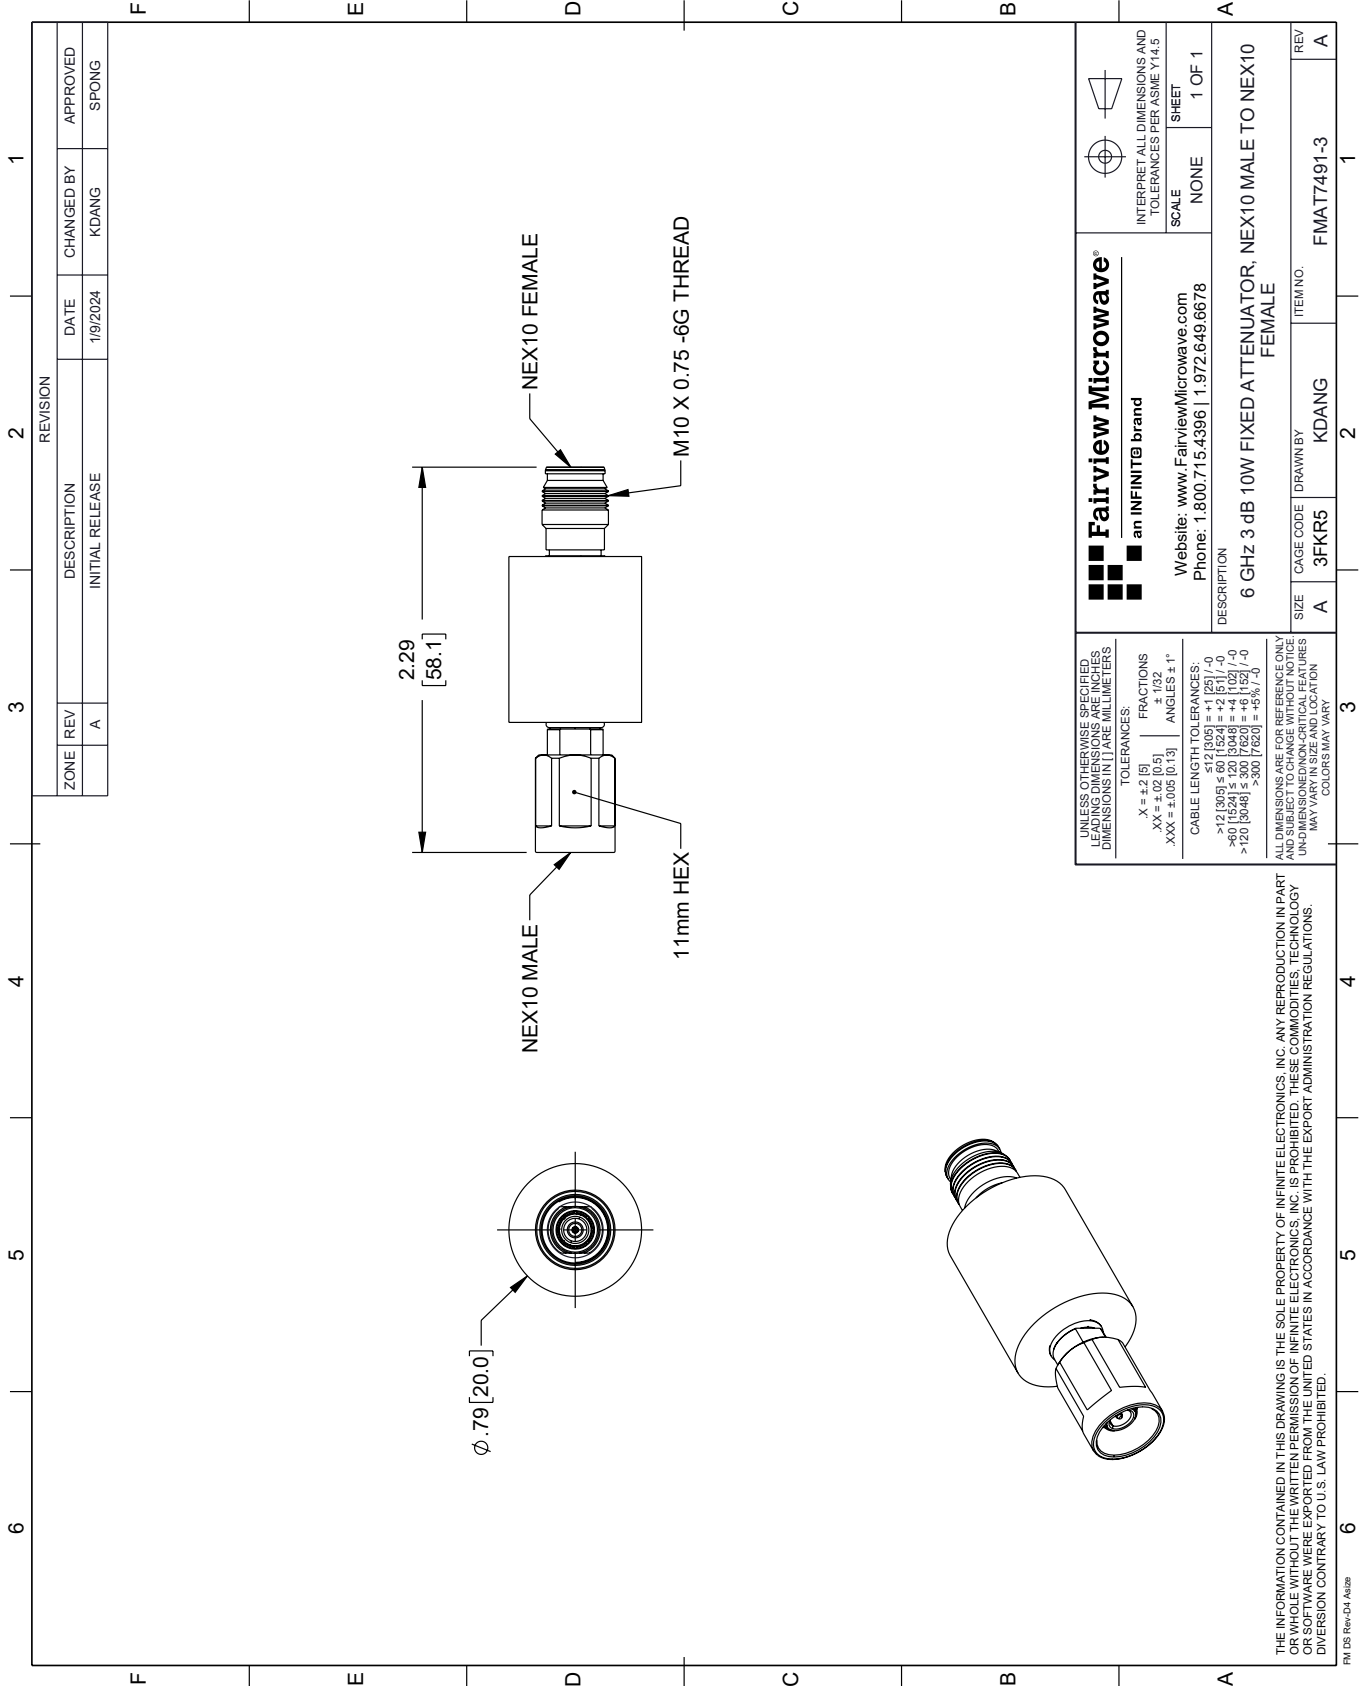

REVISION		DATE	CHANGED BY	APPROVED	
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	1/9/2024	KDANG	SPONG

**Fairview Microwave**  
an INFINITI® brand

Website: [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com)  
Phone: 1.800.715.4396 | 1.972.649.6678

DESCRIPTION: 6 GHz 3 dB 10W FIXED ATTENUATOR, NEX10 MALE TO NEX10 FEMALE

SCALE: NONE  
SHEET: 1 OF 1

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3FKR5	KDANG	FMAT7491-3	A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:  
 .X = ±.2 [5]      FRACTIONS ± 1/32  
 .XX = ±.02 [0.5]      ANGLES ± 1°  
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:  
 <12 [305] ≤ 60 [1524] = +.2 [5] / -0  
 >60 [1524] ≤ 120 [3048] = +.4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +.6 [15] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/UNCLEAR FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

FM DS Rev-D4 Alt2b